



# Live Services Management Guide

for Version 11.2



Copyright © 1994-2018 Dell Inc. or its subsidiaries. All Rights Reserved.

## **Contact Information**

RSA Link at <https://community.rsa.com> contains a knowledgebase that answers common questions and provides solutions to known problems, product documentation, community discussions, and case management.

## **Trademarks**

For a list of RSA trademarks, go to [www.emc.com/legal/emc-corporation-trademarks.htm#rsa](http://www.emc.com/legal/emc-corporation-trademarks.htm#rsa).

## **License Agreement**

This software and the associated documentation are proprietary and confidential to Dell, are furnished under license, and may be used and copied only in accordance with the terms of such license and with the inclusion of the copyright notice below. This software and the documentation, and any copies thereof, may not be provided or otherwise made available to any other person.

No title to or ownership of the software or documentation or any intellectual property rights thereto is hereby transferred. Any unauthorized use or reproduction of this software and the documentation may be subject to civil and/or criminal liability.

This software is subject to change without notice and should not be construed as a commitment by Dell.

## **Third-Party Licenses**

This product may include software developed by parties other than RSA. The text of the license agreements applicable to third-party software in this product may be viewed on the product documentation page on RSA Link. By using this product, a user of this product agrees to be fully bound by terms of the license agreements.

## **Note on Encryption Technologies**

This product may contain encryption technology. Many countries prohibit or restrict the use, import, or export of encryption technologies, and current use, import, and export regulations should be followed when using, importing or exporting this product.

## **Distribution**

Dell believes the information in this publication is accurate as of its publication date. The information is subject to change without notice.

September 2018

## Contents

---

<b>Live Services Management</b>	<b>5</b>
NetWitness Platform Live	5
The CMS Library	5
NetWitness Platform Feedback and Data Sharing	5
<b>Live Services Required Procedures</b>	<b>6</b>
Create Live Account	7
Set Up Live Services on NetWitness Platform	11
Find and Deploy Live Resources	12
Deploy Resources in Live	13
Manage Live Resources	20
Procedures	20
<b>Additional Procedures</b>	<b>22</b>
Export Data to RSA	23
About Live Feedback	23
Download Live Feedback Historical Data	23
Share Data to RSA	24
Packaging Resources	25
Create and Deploy Resource Package Use Case	25
Prerequisites to Create a Resource Package	25
Creating a Resource Package	25
Creating Threat Package	26
Deploying a Threat Package	27
Manage Custom Feeds	29
Custom Feed Creation	29
Sample Feed Definition File	30
Feed Definition Equivalents for Custom Feed Wizard Parameters	30
Creating a Custom Feed	33
Create a STIX Custom Feed	44
Creating and Managing an Identity Feed	57
Editing a Feed	69
Removing a Feed	71
Miscellaneous Live Services Procedures	72
Adding Subscribed Resources for Deployment to Services	73
Deleting a Subscription	73
Displaying Resource Details in Live Resource View	73
Downloading a Resource	74
Locating and Removing a Deployed Resource from Services	75
Removing Subscribed Resources from the Deployments Subscriptions Grid	75
Showing Results as a List or in Detail	76
Subscribe and Unsubscribe to a Resource	77
Viewing Resource Details	78
Viewing Subscribed Resources Selected to Deploy on Services	78
<b>References</b>	<b>79</b>
Live Configure View	79
Deployments Tab	79
Subscriptions Tab	81
Discontinued Resources Tab	83
Live Feeds View	85
Toolbar	86
Feeds Grid	87
Live Resource View	87
Resource Details	88
Resource View Toolbar	89
Live Search View	90
Search Criteria Panel	91

Matching Resources Panel .....	93
Resource Package Deployment Wizard .....	95
Features .....	96
Package Tab .....	96
Resources Tab .....	97
Services Tab .....	98
Review Tab .....	99
Deploy Tab .....	100
RSA Live Registration Portal .....	101
NetWitness Platform Feedback and Data Sharing .....	104
Additional Live Services .....	104
Live Feedback .....	104
RSA Live Connect .....	104
Participation .....	107
<b>Troubleshooting .....</b>	<b>110</b>
Troubleshooting OutOfMemoryError on Context Hub Server .....	110
Troubleshooting Content Deployment Using logon.type Meta Key .....	110

# Live Services Management

---

RSA NetWitness Platform Live is the gateway to a rich environment that offers access to feeds, tools, and other resources.

## NetWitness Platform Live

Live is the component of NetWitness Platform that manages communication and synchronization between NetWitness Platform services and a library of Live content available to RSA NetWitness Platform customers. Live provides a simple interface for browsing, selecting, and deploying content from the NetWitness Platform Live Content Management System to NetWitness Platform services and software. In addition to managing feeds from the CMS Library, Live allows users to deploy custom feeds and packages.

## The CMS Library

The content management system (CMS) library (known as *Live*) is a valuable source of the latest internet security resources for NetWitness Platform customers. It provides a view into the collective intelligence and analytical skills of the worldwide security community to ensure that users have the most current visibility into attack vectors.

Live gathers the best advanced threat intelligence and content in the global security community - the ideas, research, ongoing tracking, and analysis - and brings it directly into the user's security operations center to definitively classify computers associated with botnets, malware, and other malicious exploits. Live aggregates, consolidates, and illuminates only the most pertinent information relevant to an organization on a real-time basis.

## NetWitness Platform Feedback and Data Sharing


**Live Feedback** is intended to help improve RSA NetWitness Platform. Once you set up and configure a Live account, usage data is shared with RSA.

**RSA Live Connect** is a cloud based threat intelligence service. This service collects, analyzes, and assesses threat intelligence data such as IP addresses, domains, and files collected from various sources. It **Threat Insights**, which provide analysts the ability to pull threat intelligence data from the Live Connect service. It also offers **Analyst Behaviors**, an automated data collection service with the goal of sharing potential threat intelligence for analysis.

For more details, see [NetWitness Platform Feedback and Data Sharing](#).

## Live Services Required Procedures


The following workflow breaks out the basic setup into four steps, which you can do individually. The easiest way to set up the Decoder is to follow the end-to-end procedure in this section, [Live Services Required Procedures](#)), which includes all of the steps.

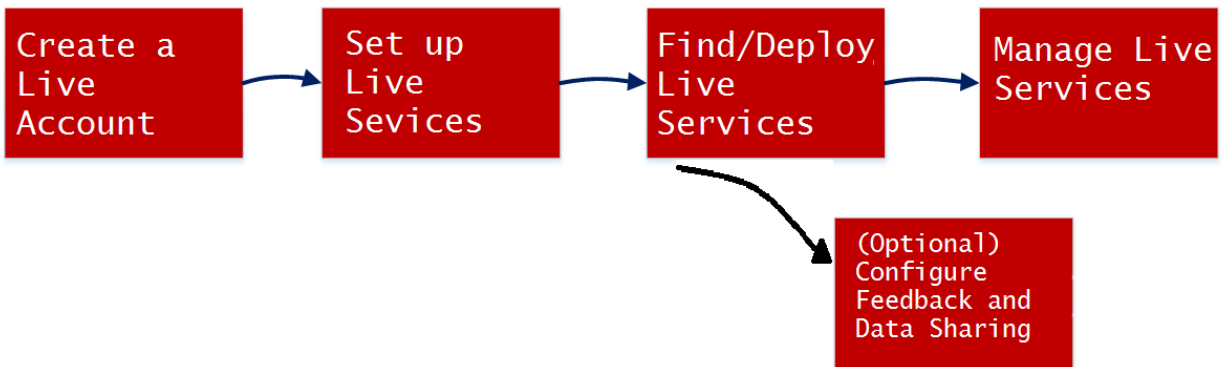

Configuration Step	Description
<a href="#">Create Live Account</a>	Create a Live Account on the RSA Live Registration portal URL: <a href="https://cms.netwitness.com/registration/">https://cms.netwitness.com/registration/</a> . If you have an existing account, you can manage your account using this portal.
<a href="#">Set Up Live Services on NetWitness Platform</a>	Set Up Live Services on NetWitness Platform by configuring a connection with the CMS server.
<a href="#">Find and Deploy Live Resources</a>	Search and browse for resources in the Live Search view, and then, deploy the selected resources.
<a href="#">Manage Live Resources</a>	Procedures for administrators to search for, subscribe to, and deploy resources from Live.
<a href="#">NetWitness Platform Feedback and Data Sharing</a>	Describes the feedback and data sharing features provided in RSA NetWitness® Platform, from Live Services. Participation is optional, but can help to provide useful threat intelligence for the community.

## Create Live Account

You must create a Live account using the RSA Live Registration Portal on the CMS server. The CMS Library provides access to all RSA content in one place where you can view, search, deploy, and subscribe to RSA content. You must register on the RSA Live Registration Portal and select a subscription level.

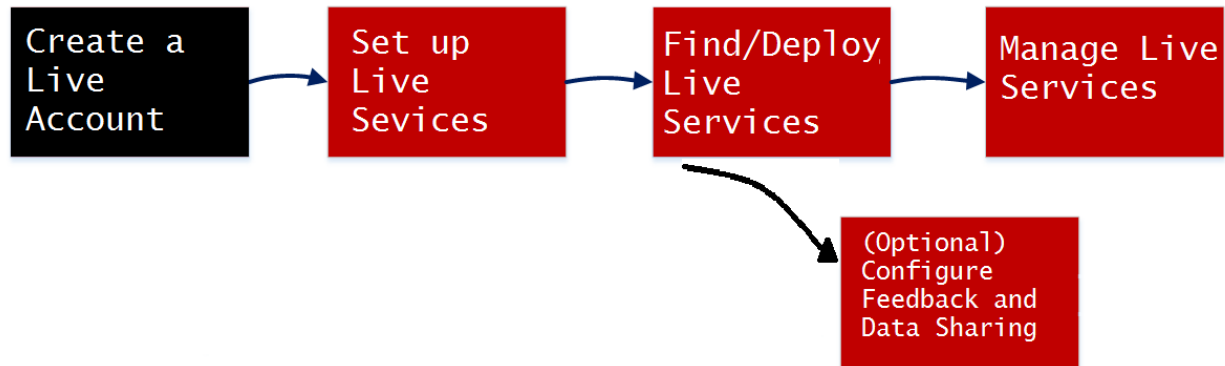

Make sure the following are available to set up a RSA Live account:

- Active internet connection to access the portal.
- A valid and registered NetWitness Platform License Server on the Flexera Server, before you can register for a Live account. You can view the License ID on the **ADMIN > System > Info** panel.

**Note:** If the License Server is not set up, contact RSA customer support.

### To create a Live Account:

1. Access the RSA Live Registration Portal using the URL: <https://cms.netwitness.com/registration/>. The Welcome page is displayed.
2. Read the Terms and Conditions carefully and select the **I Agree** check box:

**RSA Security Analytics**

Welcome to the RSA Live Registration Portal

Thank you for using RSA Security Analytics.

Please sign up here for your RSA Live account to access your subscription content.

Terms and Conditions

\*\*\* IMPORTANT INFORMATION – PLEASE READ CAREFULLY \*\*\*

This Software contains computer programs and other proprietary material and information, the use of which is subject to and expressly conditioned upon acceptance of this License Agreement (the "Agreement").

This Agreement is a legally binding document between you (meaning the individual person or the entity that the individual represents that has obtained the Software and Hardware for its internal productive use and not for outright resale) (the "Customer") and RSA (which means (i) RSA Security LLC, if Customer is located in the United States, Mexico or South America; (ii) the local EMC Corporation sales subsidiary, if Customer is located outside the United States, Mexico or South America and in a country in which EMC Corporation has a local sales subsidiary; and (iii) EMC Information Systems International ("EISI"), if Customer is located outside United States, Mexico or South America and in a country in which EMC Corporation does not have a local sales subsidiary). Unless RSA agrees otherwise

I Agree: ☒

« Back Next »

3. Click **Next**.
4. In the **Contact Information** section, enter all the fields:
  - The **username** must contain a minimum of nine characters and a maximum of 60 characters.
  - The **password** must contain a minimum of nine characters and a maximum of 60 characters, with at least one uppercase, one lowercase, one number, and one special character.
  - The **email address** you enter is used to send notifications related to your Live account.





The image shows a web form for RSA Security Analytics registration. The header is blue with the RSA Security Analytics logo. Below the header is a section titled "Company and Contact Information". Inside this section, there is a prompt "Please fill out the following form." and a link "Change / Reset Password". The form is divided into two main sections: "Contact Information" and "License Server Id". The "Contact Information" section contains fields for First Name, Last Name, Company, Title, Username, Password, Confirm Password, Email Address, and Confirm Email Address. The "License Server Id" section contains a text box for the License Server Id and a note about ECAT customers. At the bottom of the form are "Back" and "Next" navigation buttons.

**RSA Security Analytics**

**Company and Contact Information**

Please fill out the following form. [? Change / Reset Password](#)

**Contact Information**

First Name: John

Last Name: Smith

Company: Xyz Software

Title: System Engineer

Username: John.Smith.Live

Password: .....

Confirm Password: .....

Email Address: john.smith01@xyz.com

Confirm Email Address: john.smith01@xyz.com

**License Server Id**

.....

If you are an ECAT customer, or do not have a Security Analytics License Server Id, please contact Customer Support to register.

[Contact Information](#)

« Back Next »

5. In the **Subscription Level** section, select one of the following subscription levels:
  - **Basic** - This provides access to the Live content that is tagged for groups such as Basic, Panorama for Log Decoder, and Spectrum for Malware Analysis.
  - **Enhanced** - This provides access to the Live content that is tagged for groups such as Enhanced, Basic, Panorama for Log Decoder, and Spectrum for Malware Analysis.
  - **Premium** - This provides access to the Live content that is tagged for groups such as Premium, Verisign Premium, Enhanced, Basic, Panorama for Log Decoder, and Spectrum for Malware Analysis.
6. In the **Confirm Subscription Level** section, select the subscription level once again to confirm.

7. Enter the **License Server Id**. You can view the License Id on the **ADMIN > SYSTEM > Info** page.


**Caution:** Make sure that the license server ID on NetWitness Platform is valid and it is registered on the Flexera Server. If not, contact RSA Customer Support.

8. Click **Next**.

If the registration is successful you will receive RSA Live Account Confirmation email with your username. You now have access to the content subscribed.

## Set Up Live Services on NetWitness Platform

To set up Live on NetWitness Platform, you configure the connection and synchronization between the CMS server and NetWitness Platform. The user interface for this setup is the **ADMIN > System > Live Services** Configuration panel.

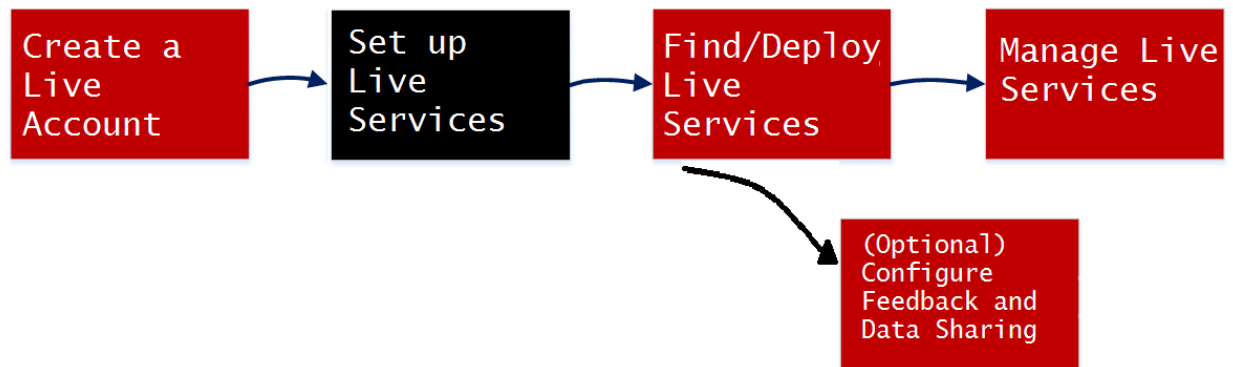

### To configure the connection to the CMS Server:

1. Configure the connection to the CMS server and the Live account.


The image shows a 'Live Services Account' configuration window. It contains the following fields and controls:

- Host:** cms.netwitness.com
- Port:** 443
- SSL:** ☒
- Username:** admin
- Password:** masked with asterisks (\*\*\*\*\*)
- Test Connection:** A button to verify the connection.
- Buttons:** 'Cancel' and 'Apply' buttons at the bottom right.

2. Configure the timing for synchronization of NetWitness Platform with updates from Live.
- For more details, see the "Configure Live Services Settings" topic in the *System Configuration Guide*.

## Find and Deploy Live Resources

Administrators can search for resources in the Live Search view, which is also the same as browsing the Live CMS for resources using the Search Criteria panel of the [Live Search View](#).

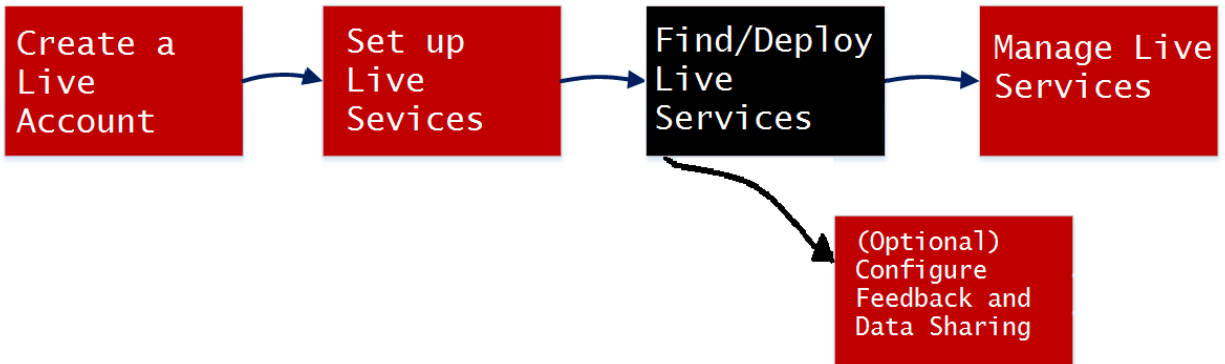

### To find resources:


1. In the **Search Criteria** panel, specify search criteria. Enter any or all of these: keyword, category, type of resource, medium, meta keys, meta values, date resource was created, and date resource was modified.

The screenshot shows the 'Search Criteria' panel with the following fields and options:

- Keywords:** A text input field.
- Category:** A list of checkboxes for 'FEATURED', 'THREAT', 'IDENTITY', 'ASSURANCE', and 'OPERATIONS'.
- Resource Types:** A dropdown menu.
- Medium:** A dropdown menu.
- Required Meta Keys:** A text input field.
- Generated Meta Values:** A text input field.
- Resource Created Date:** Two date pickers for 'Start Date' and 'End Date'.
- Resource Modified Date:** A date picker.
- Search:** A blue button at the bottom right.

2. Click **Search**.

Detailed results are shown in the Matching Resources panel.

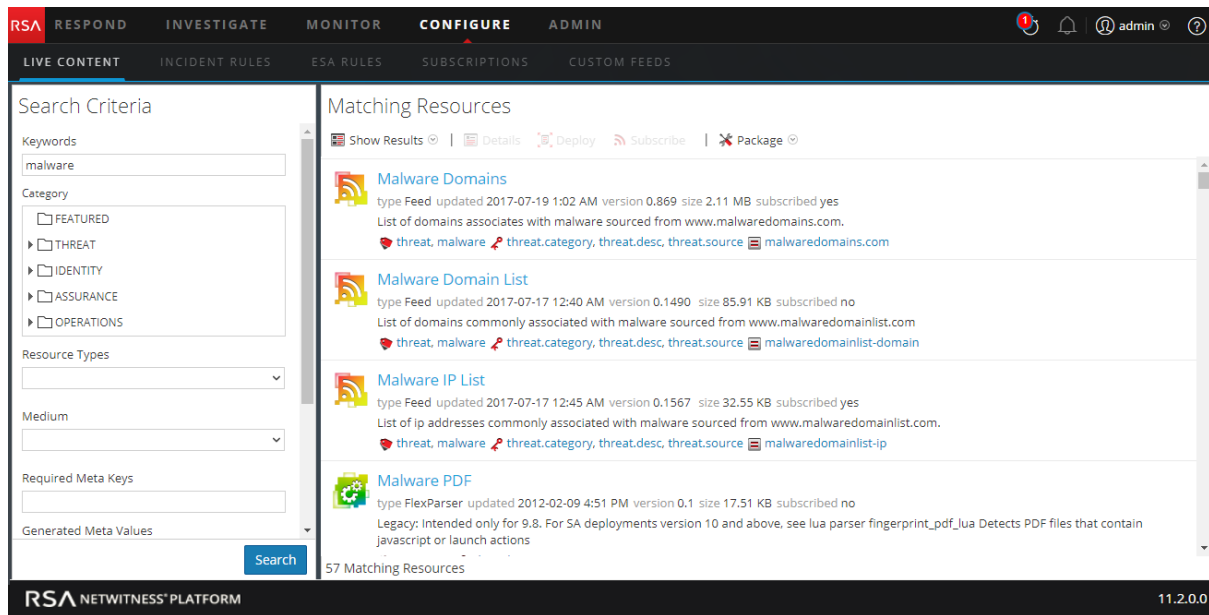

- (Optional) To further narrow the results In the Matching Resources panel, click on a tag, meta key, medium or resource meta value in a result.

## Deploy Resources in Live

In RSA NetWitness Platform, you can deploy selected resources manually, using the Deployment Wizard, or you can subscribe to a group of resources.

- When you have results from browsing resources in NetWitness Platform Live, you can deploy resources manually to a service or a service group without subscribing to the resources.
- Deploying resources manually deploys to services without taking advantage of the powerful resource management capabilities of NetWitness Platform. If you want to receive notification and updates for updated resources and be able to easily remove resources from a service, you must subscribe to resources in the Live Search view and deploy them in the [Live Configure View](#).

### To deploy manually:

- Select a resource or group of resources, or select a previously-created package of resources.
- Click **Deploy**, which starts the Deployment Wizard.
- Review the list of selected resources.
- Select the Services or Service Groups on which to deploy the selected resources.
- Review your previous selections.
- Deploy.

The following procedure describes how to deploy a group of resources or a resource package:

- You can select one or more resources in the [Live Resource View](#) , then deploy them to services.
- Or, if you have previously created and saved a resource package, you can deploy the package to services. Please refer to [Resource Package Deployment Wizard](#) for instructions on how to create a package.

### To deploy resources manually:

1. Go to **CONFIGURE > Live Content**.
2. Select a group of resources, or a previously created resource package.


To select a resource or group of resources:

- a. In the **Live Search View**, browse Live resources (for example, search for the **Log Collector** resource Type).
- b. In the **Matching Resources** panel, select **Show Results > Grid**.
- c. Select the checkbox to the left of the resources that you want to deploy.

The screenshot displays the RSA NetWitness Platform interface. The top navigation bar includes tabs for RESPOND, INVESTIGATE, MONITOR, CONFIGURE, and ADMIN. The CONFIGURE tab is active, and the LIVE CONTENT sub-tab is selected. On the left, the Search Criteria panel shows filters for Category (FEATURED, THREAT, IDENTITY, ASSURANCE, OPERATIONS), Resource Types (Log Collector), Medium, Required Meta Keys, and Generated Meta Values. The Matching Resources panel on the right displays a table of resources with columns: Subscribed, Name, Created, Updated, Type, and Description. Two resources are selected with checkboxes. The bottom status bar shows 170 Matching Resources and the version 11.2.0.0.

Subscribed	Name	Created	Updated	Type	Description
<input type="checkbox"/>	Windows Events (NIC) Log ...	2013-11-22 2:15 PM	2016-07-07 2:26 PM	Log Collector	Log Collector configuration can
<input checked="" type="checkbox"/>	AWS CloudTrail Log Collec...	2015-06-16 11:38 PM	2017-06-14 7:41 AM	Log Collector	10.5 and higher. Log Collector
<input type="checkbox"/>	Microsoft Exchange Log Col...	2013-11-22 1:46 PM	2016-07-07 2:17 PM	Log Collector	Log Collector configuration can
<input checked="" type="checkbox"/>	Symantec Critical System...	2013-11-22 6:38 AM	2016-07-07 2:20 PM	Log Collector	Log Collector configuration cr
<input type="checkbox"/>	Oracle Log Collector Config...	2013-11-22 6:32 AM	2016-08-26 12:04 PM	Log Collector	Log Collector configuration can
<input type="checkbox"/>	EMC Documentum Log Coll...	2013-11-22 6:16 AM	2016-07-07 2:12 PM	Log Collector	Log Collector configuration can
<input type="checkbox"/>	IBM DB2 Log Collector Conf...	2013-11-22 6:20 AM	2016-07-07 2:13 PM	Log Collector	Log Collector configuration can
<input type="checkbox"/>	McAfee Web Gateway Log ...	2013-11-22 6:27 AM	2016-07-07 2:15 PM	Log Collector	Log Collector configuration can
<input type="checkbox"/>	Tenable Network Security ...	2013-11-22 6:30 AM	2016-07-07 2:19 PM	Log Collector	Log Collector configuration can
<input type="checkbox"/>	SunOne LDAP Directory Ser...	2013-11-22 6:37 AM	2016-07-07 2:20 PM	Log Collector	Log Collector configuration can
<input type="checkbox"/>	Oracle Access manager Log...	2014-04-07 5:03 AM	2017-04-12 12:02 PM	Log Collector	Log Collector configuration can
<input type="checkbox"/>	MS Azure Log Collector Can...	2016-09-21 1:56 PM	2017-06-12 1:08 PM	Log Collector	Log Collector configuration can
<input type="checkbox"/>	McAfee Integrity Control Lo...	2013-11-22 6:26 AM	2017-06-14 6:18 AM	Log Collector	Log Collector configuration can
<input type="checkbox"/>	Actiance Vantage Log Colle...	2013-11-22 6:09 AM	2016-07-07 2:11 PM	Log Collector	Log Collector configuration can

- d. In the Matching Resources toolbar, click  **Deploy**.

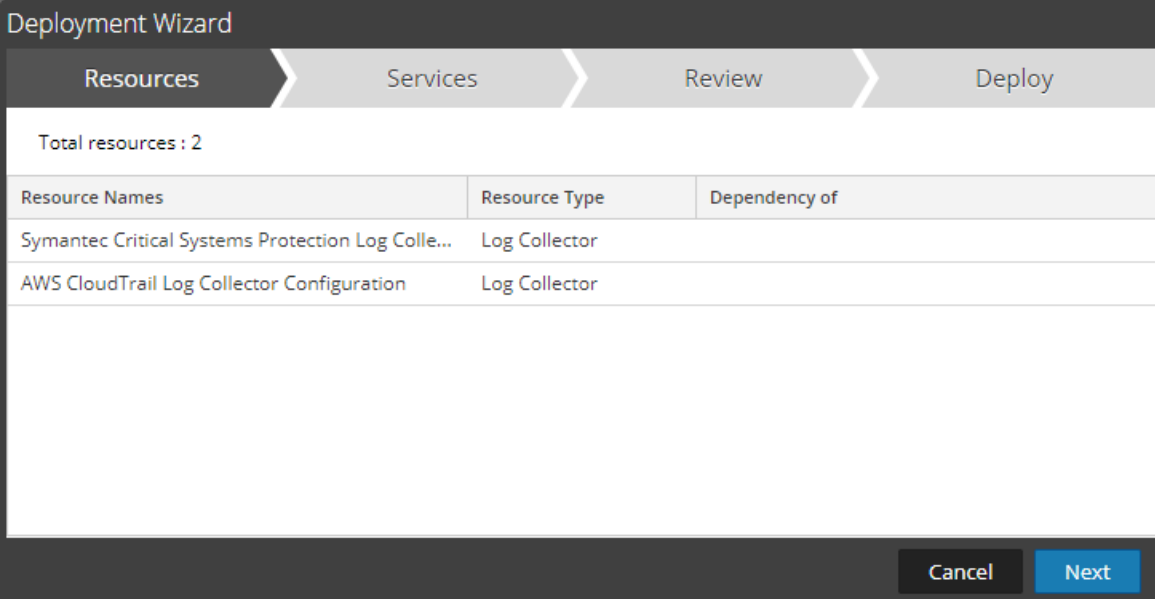

The screenshot shows the 'Deployment Wizard' window with four steps: Resources, Services, Review, and Deploy. The 'Resources' step is active. It displays 'Total resources : 2' and a table with two rows of resources.


Resource Names	Resource Type	Dependency of
Symantec Critical Systems Protection Log Colle...	Log Collector	
AWS CloudTrail Log Collector Configuration	Log Collector	

At the bottom right, there are 'Cancel' and 'Next' buttons.

3. To select a resource package to deploy:

- a. In the **Live Search** view - **Matching Resources** toolbar, select **Package > Deploy**.

The Package page of the Resource Package Deployment wizard is displayed.

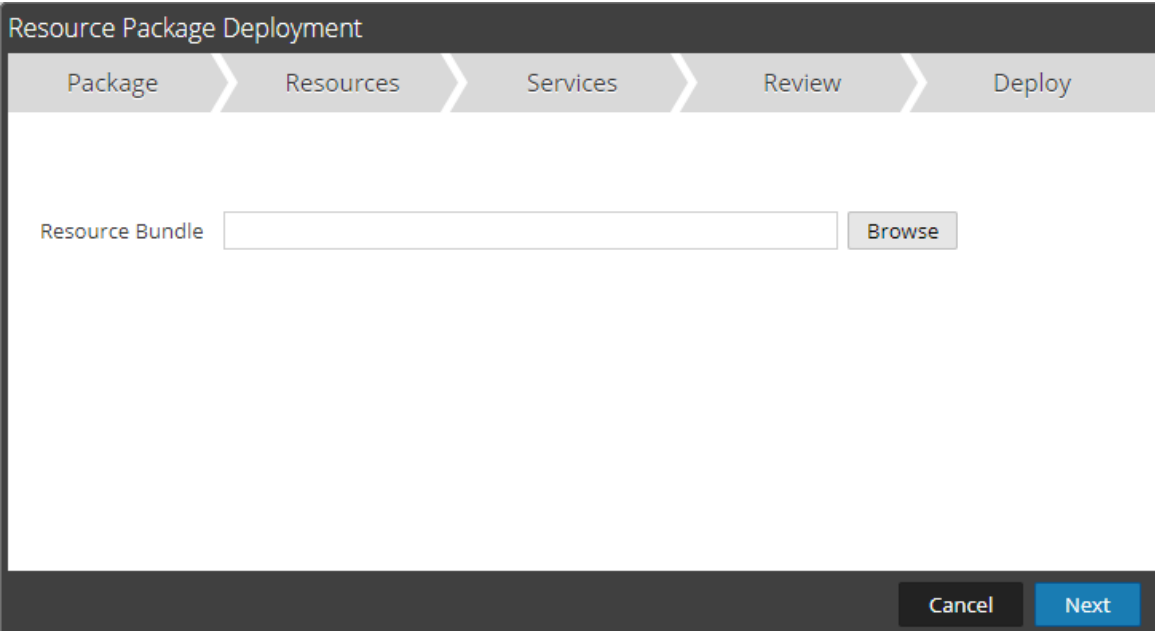

The screenshot shows the 'Resource Package Deployment' window with five steps: Package, Resources, Services, Review, and Deploy. The 'Package' step is active. It features a 'Resource Bundle' text input field and a 'Browse' button. At the bottom right, there are 'Cancel' and 'Next' buttons.

- b. Click Browse and select a package from your network (for example **resourceBundle-FeedsParsersContent.zip**).
- c. Click **Open**.

At this point, whether you are deploying a package or a group of resources, the **Deployment Wizard** opens, and the **Resources** page is displayed.

4. Click **Next**.

The **Services** page displayed has two tabs, **Services** and **Groups**, which provide a list of services and service groups that are configured in the **ADMIN > Services** view. The columns are a subset of the columns available in the Services view.

**Note:** The Live server is "smart" about deploying resources to Services. For example, it does not deploy resources that have a Medium of packets to any Log Decoders. This means that only applicable content resources are deployed to each Service.

5. Select the services to which you want to deploy the content. You can select any combination of services and service groups.

- Use the **Services** tab to select individual services, list of services and service groups that are configured in the **ADMIN Services** view.
- Use the **Groups** tab to select groups of services.

The screenshot shows the 'Deployment Wizard' interface with the 'Services' tab selected. The wizard has four steps: Resources, Services (current), Review, and Deploy. Below the tabs, there are two sub-tabs: 'Services' (active) and 'Groups'. A table lists available services with checkboxes for selection. One service, 'SA UI Endpoint', is selected. The table has columns for 'Name' and 'Type'.

	Name ^	Type
<input checked="" type="checkbox"/>	SA UI Endpoint	Other

At the bottom of the wizard, there are three buttons: 'Cancel', 'Previous', and 'Next'.

6. Click **Next**.

The **Review** page is displayed.



### Deployment Wizard

Resources
Services
**Review**
Deploy

Service	Service Type	Resource Name	Resource Type
SA UI Endpoint	SA Local	Basic Rule Template	RSA Event Stream Analy...

Cancel
Previous
Deploy

Make sure that you have selected correct resources and the services to which you want to deploy them.

7. Click **Deploy**.

The **Deploy** page is displayed. The Progress bar turns green when you have successfully deployed the resources to the selected services.

**Deployment Wizard**

Resources

Services

Review


Deploy

Live deployment task finished successfully

Service Name	Resource Name	Status	Progress
SA UI Endpoint	Basic Rule Template	1 of 1	<div></div>

Close

If you try to deploy resources and services that are not compatible, NetWitness Platform displays the Errors and Retry buttons, which you can click to review the errors and re-attempt the deployment.

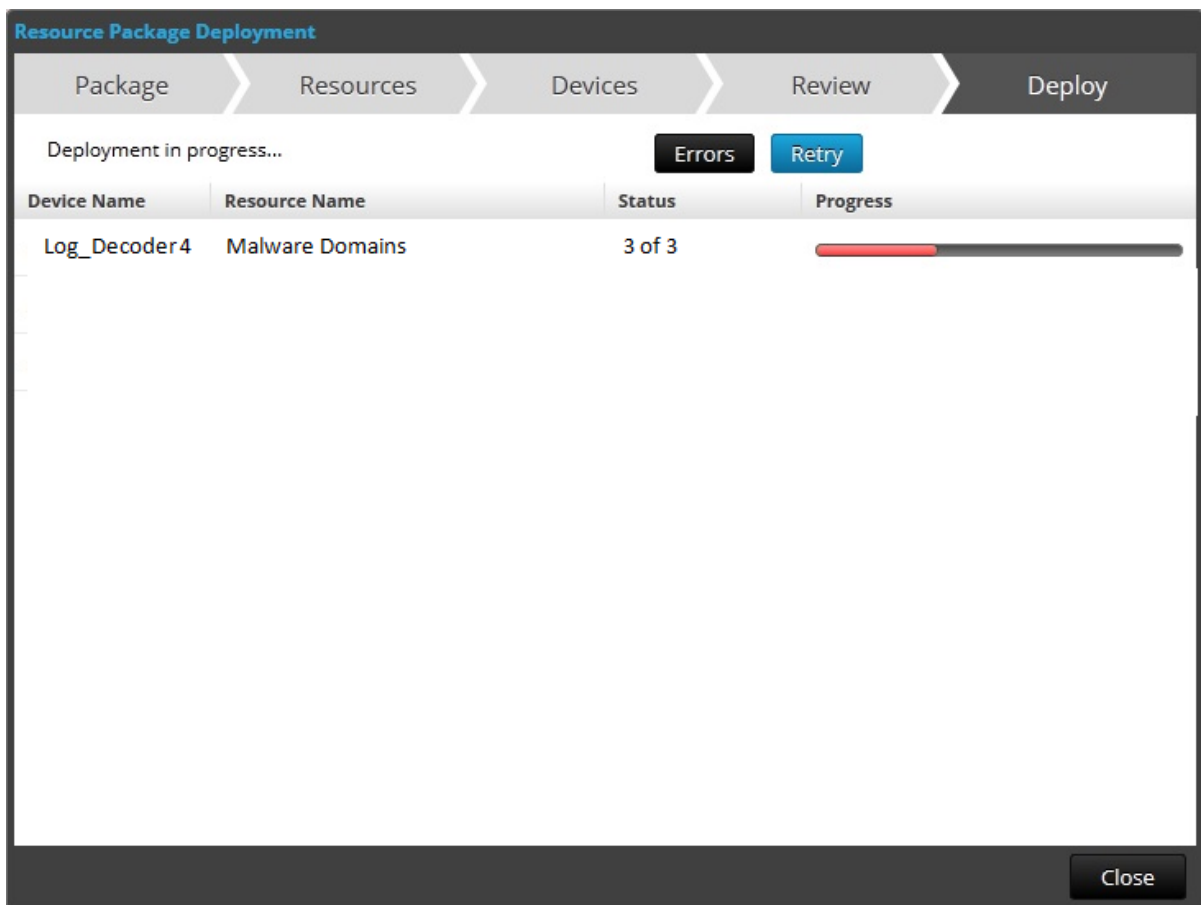


8. Click **Close**.

### Next steps

After deploying parsers to Decoders and Log Decoders, you must enable parsers on the individual services as described in the *Decoder and Log Decoder Configuration Guide*.

## Manage Live Resources

These procedures are required when administrators want to search for, subscribe to, and/or deploy resources from Live. With a connection to the CMS server, you can search for, subscribe to, and deploy resources from Live in accordance with your subscription level. Once you have found resources, you deploy them to services and service groups that have been configured in the Admin Services view.

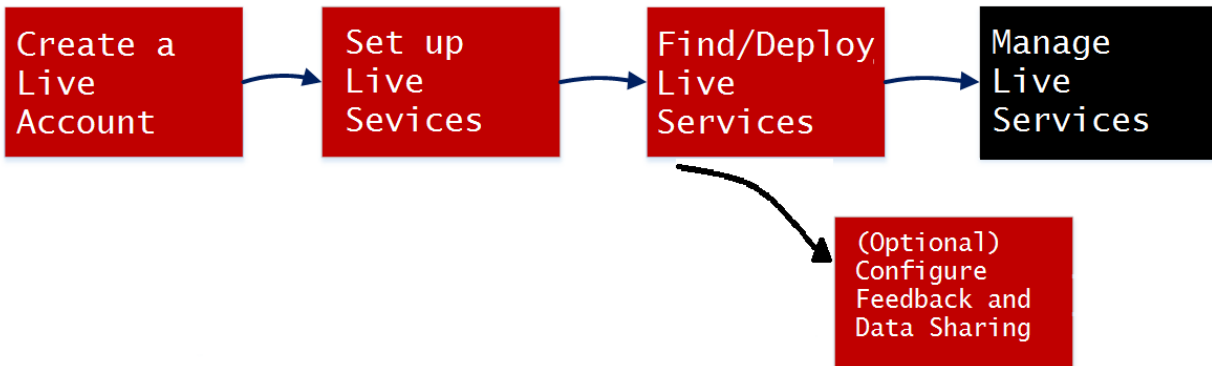

## Procedures

There are several possible workflows for deploying resources to services and managing those deployments. These include:

- Subscribe and deploy resources
- Deploy a resource bundle
- Remove deployments of resources
- Download resources
- Set up data feeds

## Manage Subscription and Deployment

The subscription and deployment workflow takes advantage of the resource management tools available in Live. By subscribing to resources, you agree to receive updated resources in accordance with the synchronization configured in the **ADMIN > Live Configuration** panel.


By adding subscribed resources to the deployments list, you configure NetWitness Platform to automatically push those resources to the selected services at the configured synchronization intervals. This method requires some planning of service groups and services where resources are deployed. In addition:

- You can remove a resource from the deployments list in the [Deployments Tab](#).
- You can unsubscribe from a resource in the [Subscriptions Tab](#) and the [Live Resource View](#).

### To manage subscriptions and deployment:

1. In the **ADMIN > SYSTEM > Live** panel, specify an interval at which NetWitness Platform checks for updates to subscribed resources in Live and specify the email addresses of people to receive an

email listing subscribed resources that have been updated.

2. In the **Live > Search** view, search for and subscribe to Live resources.
3. In the **Live > Configure** view > **Deployments** tab, select subscribed resources and add them to the deployment list for services groups.
4. (Optional) In the **ADMIN > SYSTEM > Live** panel, click  to deploy the resources listed in the Deployments tab immediately.
5. In the **Live > Configure** view > **Deployments** tab, select deployed resources and remove them from services groups.
6. In the **Live > Configure** view > **Subscriptions** tab, unsubscribe from resources.

### Remove a Deployed Resource

Once deployed to a service, Live resources remain on the service until removed. It is a good practice to remove unused resources from services on which they are deployed.

#### To remove deployed resources:

1. Go to the [Live Resource View](#).
2. Unsubscribe from a resource, and remove it from deployed services.

### Deploy a Resource Bundle

To deploy a content package, use the [Resource Package Deployment Wizard](#). You can deploy a content package created in Live to one or more services. NetWitness Platform accepts packages in **.nwp** files or **.zip** files.

### Download Resources

To download resources to your local file system, use the **Download** button in the Live Resource view.

### Set Up Data Feeds

In the **Live > Feeds** view, you can set up and maintain Custom and Identify feeds.

## Additional Procedures

---

This topic explains the additional procedures an administrator could choose to follow which are not essential for the configuration or use of Live Services.

- [Export Data to RSA](#)
- [Packaging Resources](#)
- [Manage Custom Feeds](#)
  - [Creating a Custom Feed](#)
  - [Create a STIX Custom Feed](#)
  - [Creating and Managing an Identity Feed](#)
  - [Editing a Feed](#)
  - [Removing a Feed](#)
- [Miscellaneous Live Services Procedures](#)

## Export Data to RSA

A NetWitness Platform administrator can export the metrics in NetWitness Platform for Live Feedback.

### About Live Feedback

In the Live Services Configuration panel, there is a Live Feedback Activity Log which enables you to download the usage data required for Live Feedback. This is active regardless of the Live Account configuration.

If the Live Account is not configured, you can manually upload the usage data to RSA. For more information, see the "Configure Live Services Panel" topic in the *System Configuration Guide*.

You can first download the Live Feedback historical data, and then upload it to share with RSA.

### Download Live Feedback Historical Data

#### To download the Live Feedback historical data:

1. Go to **ADMIN > System**.
2. In the options panel, select **Live Services**.

The **Live Account** screen is displayed which consists of the **RSA Live Status** and **Download Live Feedback Activity Log**.

3. Click **Download Live Feedback Activity Log**.

The **Download Live Feedback Activity Log** window opens which allows you to download the required Live Feedback historical data.

Live Feedback Activity Logs

Download monthly anonymized activity logs and manually upload to [RSA secure portal](#).  
For use only when live account is not configured.

Download

<input type="checkbox"/>	Date Range ▾	Last Download Date
<input type="checkbox"/>	2017, June 30 - 18	

« < | Page 1 of 1 | > » | Page Size 10 ▾ Displaying 1 - 1 of 1

Close

4. Select one or multiple entries by selecting the checkboxes and click **Download**.

**Note:** If you select multiple entries in the history table, the downloaded zip file consists of an individual JSON file for each month.


The downloaded Live Feedback data is in JSON format, and is bundled as a .zip file. For more information, see "Live Feedback Overview" in the *System Configuration Guide*.

## Share Data to RSA

After you download the Live Feedback data, you can then upload it using the following procedure.


### To share the data to RSA:

1. Click on the **RSA Secure Portal** available on the **Live Feedback Activity Logs** window.  
The RSA NetWitness Platform Live Feedback log on screen is displayed.
2. Log on to the [Upload Live Feedback Activity Logs](#) portal using your Live ID credentials.

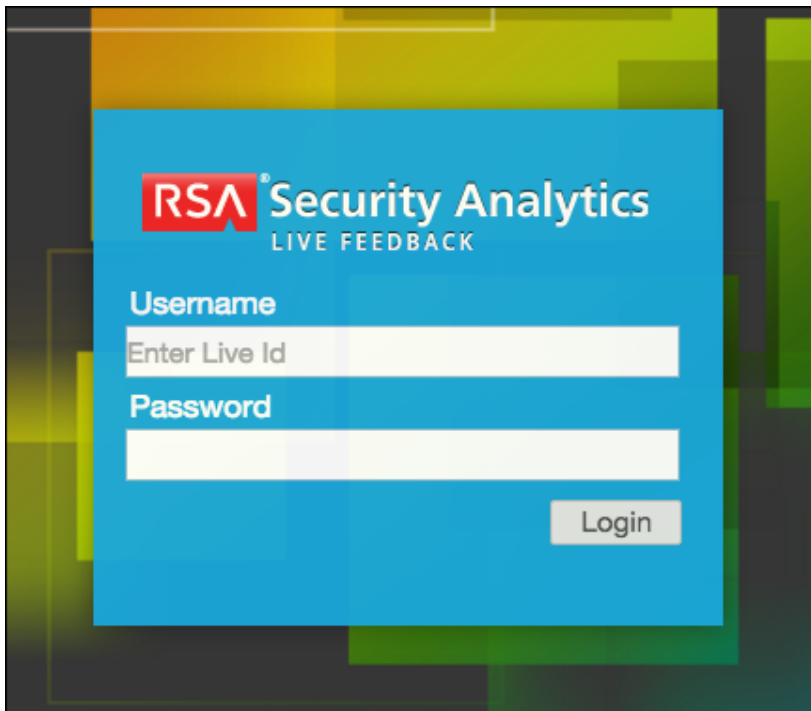

3. Click **Download Live Feedback Activity Log**.



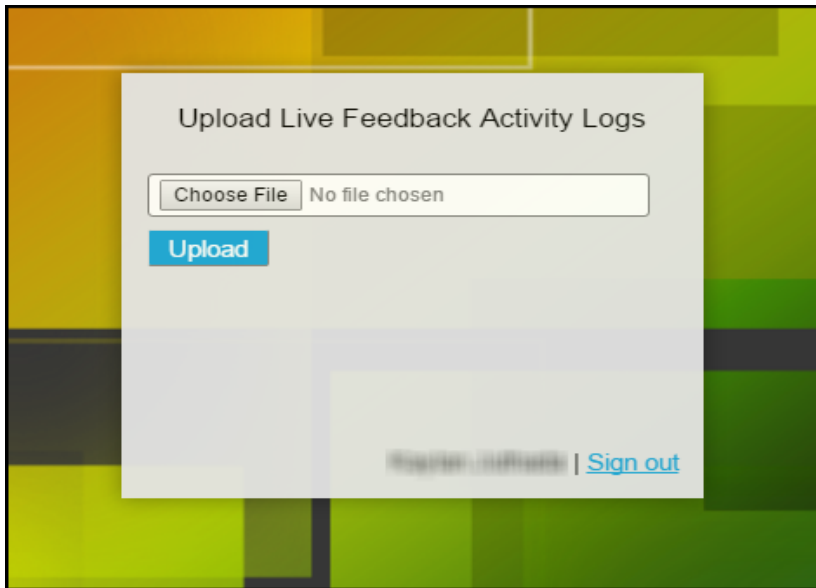

4. Click **Upload**.

## Packaging Resources

The primary use for creating and subsequently deploying a resource package is for customers using an air gap network environment. In this case, you create a resource package on the network that is connected to the internet, and then deploy the resource package on the more secure network.

### Create and Deploy Resource Package Use Case

The basic steps are as follows:

1. Access NetWitness Platform Live Services using an instance that is connected to the internet.
2. Create a Resource package as described below, adding whichever content items you need.
3. Copy the ZIP archive of the packages to your secure NetWitness Platform instance, by using a thumb drive or other manual copying process.
4. On the secure NetWitness Platform instance, deploy the resource package. For more information, see [Resource Package Deployment Wizard](#).

### Prerequisites to Create a Resource Package

A prerequisite for creating resource packages is configuration of the connection and synchronization between the CMS server and NetWitness Platform and the ability to search for resources in the User Interface.

### Creating a Resource Package

The following procedure describes how to create a resource package, as a ZIP archive and save it to your local file system.

### To create a resource package:

1. Go to **CONFIGURE > Live Content** from the RSA NetWitness UI.
2. Select the resources that you want to package in the Matching Resources grid.


3. Select some or all of the resources that are listed in the Matches Resources pane.
4. Select Package > **Create**.

NetWitness Platform creates a **.zip** archive that contains the selected resources and downloads it to your default download folder. NetWitness Platform gives the package a generic name. You should rename it when you save it so that it identifies the resources contained in the package.

### Creating Threat Package

The following procedure describes how to create a resource package that contains all the content that is categorized as **Threat**. Then we rename it, using the type of content and date.

1. Go to **CONFIGURE > Live Content**.
2. From the **Category** section, select **THREAT**.
3. Select all items returned by clicking on the checkbox in the column header row of the **Matching Resources** pane.

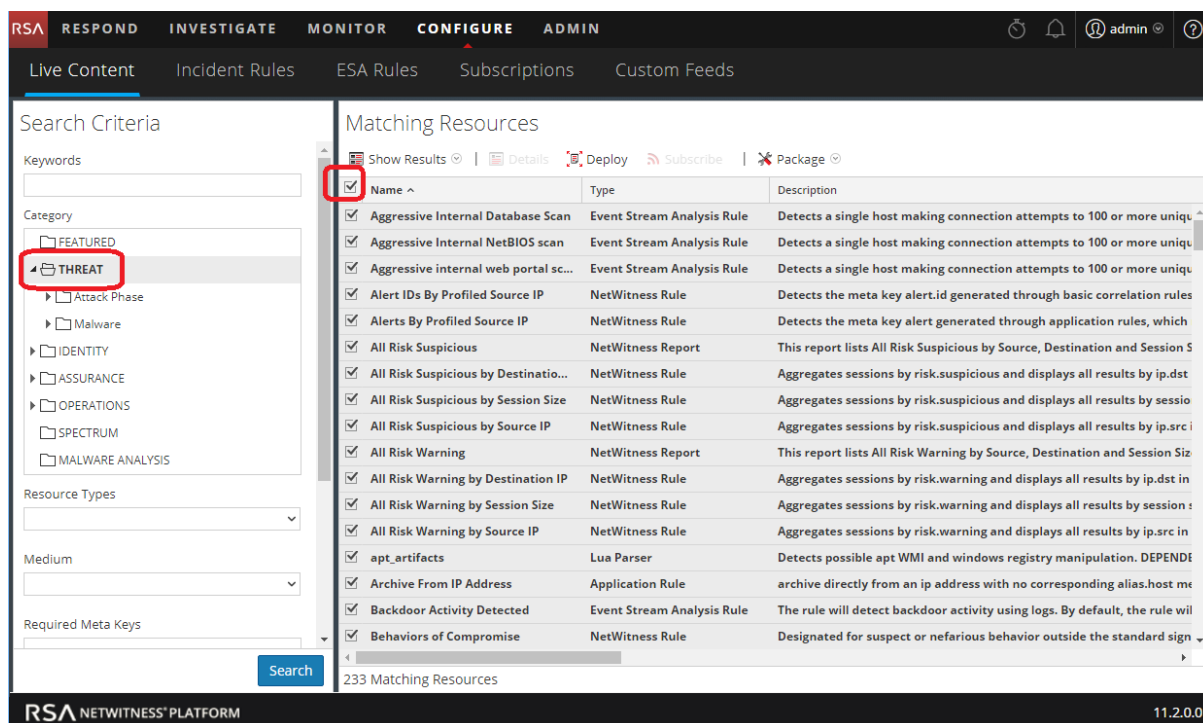

4. Select **Package** > **Create**.

A ZIP archive is saved to your Downloads folder. For example, **resourceBundle8740753704980701969.zip**.


5. Rename the package to something meaningful. For example, in this case, you could change the package name to **threatResourceBundle\_2018\_01\_31.zip** (assuming today's date is January 31, 2018).

The resource package is now available for later deployment.

## Deploying a Threat Package

Continuing the previous example, the following procedure describes how to deploy the resource package.

1. Go to **CONFIGURE > Live Content**.
2. In the **Matching Resources** pane, select **Package** > **Deploy**.
3. Click **Browse** and navigate to the **threatResourceBundle\_2018\_01\_31.zip** file that were created earlier.

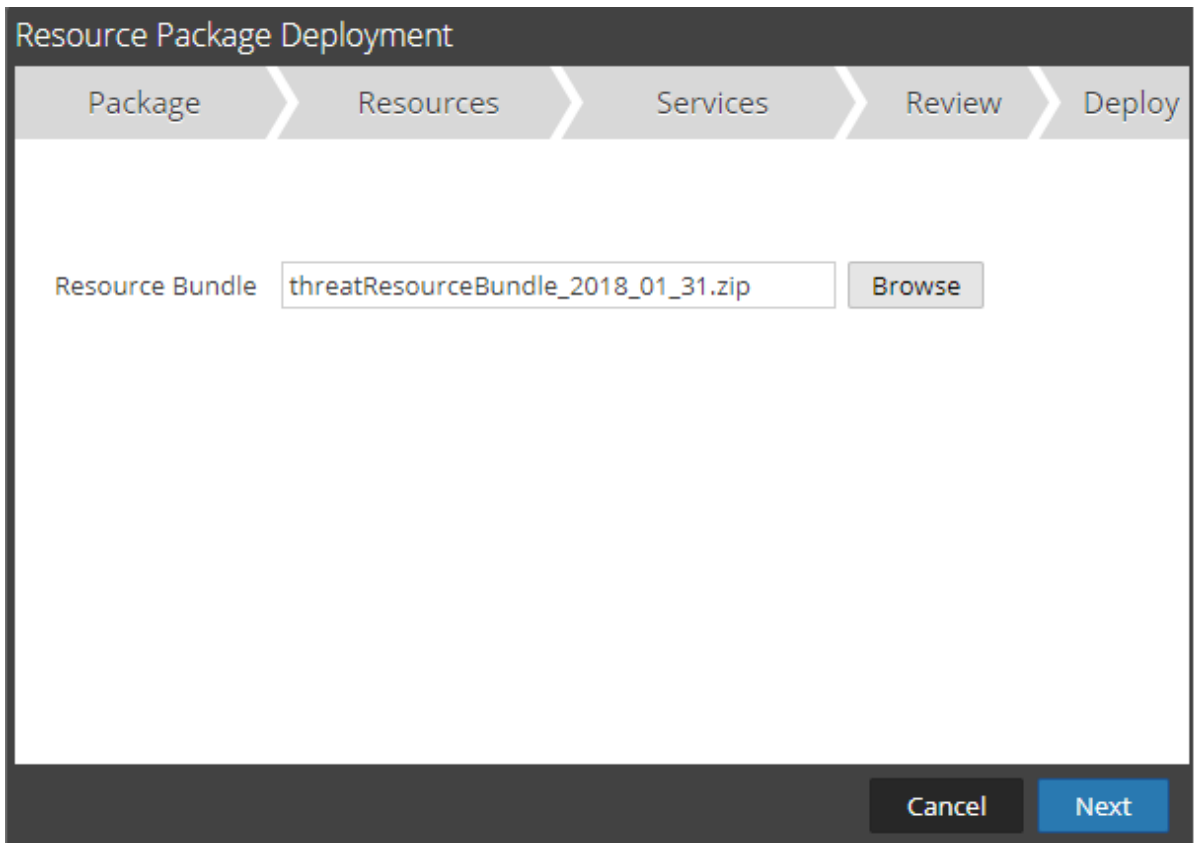

The image shows a 'Resource Package Deployment' dialog box with a dark header and a light body. The header contains a progress bar with five steps: 'Package', 'Resources', 'Services', 'Review', and 'Deploy'. The 'Resources' step is currently active. Below the progress bar, there is a label 'Resource Bundle' followed by a text input field containing the filename 'threatResourceBundle\_2018\_01\_31.zip'. To the right of the input field is a 'Browse' button. At the bottom right of the dialog, there are two buttons: 'Cancel' and 'Next'.

4. Click **Next**.



The **Resources** page displays details for the resources in the package.

5. Click **Next**.

The **Services** page displays two tabs, **Services** and **Groups**, which provide a list of services and service groups that are configured in the **ADMIN > Services** view. The columns are a subset of the columns available in the Services view.

6. Select the services to which you want to deploy the content. You can select any combination of services and service groups.

The screenshot shows the 'Deployment Wizard' interface. At the top, there are four tabs: 'Resources', 'Services', 'Review', and 'Deploy'. The 'Services' tab is currently selected and highlighted. Below the tabs, there are two sub-tabs: 'Services' (highlighted in blue) and 'Groups'. A table is displayed below these tabs with two columns: 'Name ^' and 'Type'. The table contains one row with the text 'SA UI Endpoint' under the 'Name ^' column and 'Other' under the 'Type' column. At the bottom of the wizard, there are three buttons: 'Cancel', 'Previous', and 'Next'.

<input type="checkbox"/> 	Name ^	Type
<input type="checkbox"/> 	SA UI Endpoint	Other

Click **Next**.

The **Review** page is displayed.

**Note:** Make sure that you have selected correct resources and the services to which you want to deploy them.

7. Click **Deploy** to complete the deployment process. Alternatively, you can choose **Cancel** or **Previous** to either cancel the deployment or go back to the previous screen.

## Manage Custom Feeds

This topic introduces the custom feed capability, which is implemented using the Custom Feed Wizard in RSA NetWitness Platform, to quickly populate Decoders with custom and identity feeds.

### Custom Feed Creation

You use the **Live > Feeds > Setup Feed > Configure a Custom Feed** wizard to quickly create and deploy Decoder feeds based on deterministic logic that offers the meta keys specific to the selected Decoders and Log Decoders. Although the wizard guides you through the process to create both on-demand and recurring feeds, you should understand the form and content of a feed file when you create a feed.

Feed file names in RSA NetWitness Platform are in the form <filename>.feed. To create a feed, NetWitness Platform requires a feed **data** file in .csv or .xml (for STIX) format and a feed **definition** file in .xml format, which describes the structure of a feed data file. The Configure a Custom Feed wizard can create the feed definition file based on a feed data file, or based on a feed data file and the corresponding feed definition file.

The files that you use to create an on-demand feed must be stored on your local file system. The files used to create a recurring feed must be stored at an accessible URL, whence NetWitness Platform can fetch the most current version of the file for each recurrence. After a NetWitness Platform feed is created, you can download the feed to your local file system, edit the feed files, and then edit the NetWitness Platform feed to use the updated feed files.

## Sample Feed Definition File

This is an example of a feed definition file named `dynamic_dns.xml`, which NetWitness Platform creates based on your entries in the Feed wizards. It defines the structure of the feed data file named `dynamic_dns.csv`.

**Note:** The feed file path should be .csv regardless of the Feed Type (Default or STIX).

```
<?xml version="1.0" encoding="utf-8"?>
<FDF xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="feed-definitions.xsd">

  <FlatFileFeed name="Dynamic DNS Domain Feed"
path="dynamic_dns.csv"
separator=","
comment="#"
version="1">

    <MetaCallback
name="alias.host"
valuetype="Text"
apptype="0"
truncdomain="true"/>

    <LanguageKeys>
      <LanguageKey name="threat.source" valuetype="Text" />
      <LanguageKey name="threat.category" valuetype="Text" />
      <LanguageKey name="threat.desc" valuetype="Text" />
    </LanguageKeys>

    <Fields>
      <Field index="1" type="index" key="alias.host" />
      <Field index="4" type="value" key="threat.desc" />
      <Field index="2" type="value" key="threat.source" />
      <Field index="3" type="value" key="threat.category" />
    </Fields>
  </FlatFileFeed>

</FDF>
```

## Feed Definition Equivalents for Custom Feed Wizard Parameters

The NetWitness Platform Feeds wizard provide options to define the structure of the data feed file. These correspond directly to attributes in the feed definition (.xml) file.

NetWitness Platform Parameter	Feed Definition File Equivalent
<b>Define Feed tab</b>	
<b>Feed Type</b>	Select: <b>Default</b> - to define a feed based on a <code>.csv</code> formatted feed data file. <b>STIX</b> - to define a feed based on STIX formatted <code>.xml</code> file.
<b>Feed Task Type</b>	Select: <b>Adhoc</b> - to create an on-demand feed. <b>Recurring</b> - to create a feed that recurs automatically.
<b>Name</b>	Enter a custom feed name in the feed data file that corresponds to the <code>flatfeedfile name</code> attribute in the feed definition file; for example, Dynamic DNS Test Feed.
<b>File/ Browse</b>	Enter a name of the feed data file that corresponds to the <code>flatfeedfile path</code> attribute in the feed definition file; for example, <code>dynamic_dns.csv</code> .
(STIX, Recurring) <b>Trust All Certificate</b>	Select <b>Trust All Certificate</b> , if you do not want to validate the REST server certificate. This option is enabled by default (checked).
(STIX, Recurring) <b>Certificate/Browse</b>	For client authentication with the REST URL, in the <b>Certificate</b> field, click <b>Browse</b> and select the self signed certificate. The supported certificate formats are <code>.cer</code> , <code>.crt</code> with Base64 & DER encoded files.
<b>Define Feed tab - Advanced Options</b>	
<b>XML Feed File</b>	Enter a name of the feed definition file, for example, <code>dynamic_dns.xml</code> .
<b>Separator</b>	The separator character used to separate attributes in the feed data file. It corresponds to the <code>flatfeedfile separator</code> in the feed definition file; for example, a comma.
<b>Comment</b>	The character used to identify a comment in the feed data file. It corresponds to the <code>flatfeedfile comment</code> attribute in the feed definition file; for example, #.
<b>Remove STIX data older than</b>	The number of days for which the STIX packages downloaded from TAXII server have to be stored. The STIX packages older than the specified number of days are deleted automatically. The default value is 180 days, which is also the maximum.
<b>Select Services tab</b>	Select the services to which you want to send the data feed.

NetWitness Platform Parameter	Feed Definition File Equivalent
(Define Columns tab, Define Index) <b>Type</b>	<p>The type of lookup value in the index position of the feed data file.</p> <p><b>IP</b> means that each row in the feed data file contains an IP address in the lookup value position. The IP value is in dotted-decimal format (for example, 10.5.187.42).</p> <p><b>IP Range</b> means that each row in the feed data file contains a range of IP addresses in the lookup value position. The IP range is in CIDR format (for example, 192.168.2.0/24). <b>Non IP</b> means that the each row in the feed data file contains a metadata value other than IP address in the lookup value position. The Service Type and Truncate Domain, and Callback Keys fields become active for a Non IP index.</p>
(Define Columns tab, Define Index) <b>CIDR</b>	Specifies that the IP value in the lookup position is in CIDR format. The <b>CIDR</b> attribute sets the IP address format in the field to Classless Inter-Domain Routing (CIDR) notation.
(Define Columns tab, Define Index) <b>Service Type</b>	For a Non IP index, the integer service type to filter meta lookups. It corresponds to <b>MetaCallback apptype</b> attribute in the feed definition file. A value of <b>0</b> indicates no filtering by service type.
(Define Columns tab, Define Index) <b>Truncate Domain</b>	For a Non IP index, for meta values that contain domain names (for example, hostnames), the system can strip off the host specific element in the data. Truncate Domain corresponds to the <b>MetaCallback truncdomain</b> attribute. If the value is www.example.com, it is truncated to example.com. A value of <b>False</b> selects no truncation, and <b>True</b> selects truncation.
(Define Columns tab, Define Index) <b>Callback Keys</b>	For a Non IP index, the available meta keys to match on instead of ip.src/ip.dst (the defaults for IP index type) are selectable from the drop-down list. The Callback Key corresponds to the <b>MetaCallback name</b> attribute, and the index column of the csv file must contain data that can match the chosen meta key. For example, if the username meta key is chosen, the index column of the csv file needs to be populated with users to be matched.
(Define Columns tab, Define Index) <b>Index Column</b>	Identifies the column in the feed data file that provides the lookup value for the row. Each position in each row of the feed data file is identified by a <b>Field index</b> attribute in the feed definition file. A field with an index of <b>1</b> is the first entry in a row, the second field has an index of <b>2</b> , the third field has an index of <b>3</b> , and so on. You can select multiple index columns, if the <b>Feed Type</b> is <b>STIX</b> and <b>Index Type</b> is <b>Non IP</b> . When you select multiple index columns the values from all the selected columns are merged in the first index column that you selected.
(DEFINE VALUES) <b>Key</b>	The name of the <b>LanguageKey</b> , as defined in the feed definition file, for which meta is created from this row of the feed data file. It corresponds to the <b>Field key</b> attribute in the feed definition file. A key applies only to a field whose type is set to <b>value</b> . In the feed definition file, there is a list of LanguageKeys from <b>index.xml</b> , or a summary name if Source Name and Destination Name are used. For example, <b>reputation</b> is a summary name for <b>reputation.src</b> and <b>reputation.dst</b> . This value is referenced by the Field key attribute.



## Next steps

- [Creating a Custom Feed](#)
- [Creating and Managing an Identity Feed](#)
- [Editing a Feed](#)
- [Removing a Feed](#)

## Creating a Custom Feed

This topic provides instructions for creating a custom feed using a .csv or STIX formatted feed data file in RSA NetWitness Platform.

**Note:** From 10.6.1 or later, NetWitness Platform supports Structured Threat Information Expression (STIX). For more information about STIX and creating a STIX custom feed, see [Create a STIX Custom Feed](#).

You can easily create a custom feed using the Custom Feed wizard. To complete this procedure, you need a feed data file in .csv or .xml format. If you also have an associated feed definition file in .xml format, which describes the structure of the feed data file, you can use the feed definition file to create a feed. The Custom Feed wizard can create the feed based on a feed data file, or based on a feed data file and corresponding feed definition file.

After completing this procedure, you will have created a custom feed.

The feed data file (.csv or STIX (.xml)) and optionally the feed definition file (.xml) must be available on the local file system for an on-demand custom feed. For a recurring custom feed, the files must be available at a URL that is accessible to the NetWitness Platform server.

**Note:** Any feeds that are created in 11.2 release or prior will be automatically pushed to Context Hub as Lists. The lists can be looked up in the context lookup panel of the Respond and Investigate pages. If Context Hub is not configured or the service is down, then the feeds will be pushed to Context Hub the next time the server is available.

### To create a custom feed:

1. Go to **CONFIGURE > CUSTOM FEEDS**.

The Custom Feeds view is displayed.

<input type="checkbox"/>	Name	Trigger	Disk Usage	Created	Last Run Time	Status	Progress
<input type="checkbox"/>	TEST	Once	-	2017-07-13 13:30:36	2017-07-13 13:30:36	Completed	<div></div>
<input type="checkbox"/>	TEST2	Once	-	2017-07-13 13:50:33	2017-07-13 13:50:33	Completed	<div></div>
<input type="checkbox"/>	te	Once	-	2017-07-14 04:16:51	2017-07-14 04:16:51	Completed	<div></div>
<input type="checkbox"/>	onlydom	Once	-	2017-07-14 04:21:37	2017-07-14 04:21:37	Completed	<div></div>
<input type="checkbox"/>	PCAP	Once	-	2017-07-14 09:30:49	2017-07-14 09:30:49	Completed	<div></div>

- In the toolbar, click **+**.  
The Setup Feed dialog is displayed.

Setup Feed

☒ Custom Feed

☐ Identity Feed

Cancel Next

- To select the feed type, click **Custom Feed** and **Next**.  
The Configure a Custom Feed wizard is displayed, with the Define Feed form open.

The screenshot shows a dialog box titled "Configure a Custom Feed" with a close button (X) in the top right corner. The dialog has a progress bar at the top with four steps: "Define Feed" (active), "Select Services", "Define Columns", and "Review". The "Define Feed" section contains the following fields and options:

- Feed Type:** Radio buttons for **CSV** (selected) and **STIX**.
- Feed Task Type:** Radio buttons for **Adhoc** (selected) and **Recurring**.
- Name \***: A text input field.
- Upload As Csv File Feed:** A checkbox.
- File \***: A text input field with the placeholder "Select File" and a **Browse** button.
- Advanced Options:** A section header with a dropdown arrow.

At the bottom of the dialog, there are four buttons: **Reset**, **Cancel**, **Prev**, and **Next** (highlighted in blue).

4. To define a feed based on a .csv formatted feed data file, select **CSV** in the **Feed Type** field.
5. To define an on-demand feed task that executes once, select **Adhoc** in the **Feed Task Type** field and do one of the following:
  - a. (Conditional) To define a feed based on a .csv formatted feed data file, type the feed **Name**.
  - b. Select the checkbox **Upload As CSV File Feed**, if required.
  - c. Select a .csv content **File** from the local file system, and click **Next**.
  - d. (Conditional) To define a feed based on an XML feed file, select **Advanced Options**.

The Advanced Options are displayed:

The screenshot shows a dialog box titled "Configure a Custom Feed" with a close button (X) in the top right corner. The dialog has four tabs: "Define Feed" (active), "Select Services", "Define Columns", and "Review".

Under the "Define Feed" tab, the following options are visible:

- Feed Type:** Radio buttons for ☒ CSV and ☐ STIX.
- Feed Task Type:** Radio buttons for ☒ Adhoc and ☐ Recurring.
- Name \*:** A text input field.
- Upload As Csv File Feed:** A checkbox.
- File \*:** A text input field with "Select File" and a "Browse" button.
- Advanced Options:** A section with a collapse icon and the text "Advanced Options". It contains:
  - XML Feed File:** A text input field with "Select File" and a "Browse" button.
  - Separator:** A text input field containing a comma (,).
  - Comment:** A text input field containing a hash symbol (#).
















At the bottom of the dialog, there are four buttons: "Reset", "Cancel", "Prev", and "Next".

- e. Select an XML feed file from the local file system, choose the **Separator** (default is comma), and specify the **Comment** characters used in the feed data file (default is #), and click **Next**.
- f. The Select Services form is displayed. This is an example of the form for a feed based on a feed data file with no feed definition file. If you are defining a feed based on a feed definition file, the Define Columns tab is not needed.

Configure a Custom Feed

Define Feed Select Services Define Columns Review

Services Groups

<input type="checkbox"/>		Name ^	Address	Type
<input type="checkbox"/>				Decoder
<input type="checkbox"/>				Decoder
<input type="checkbox"/>				Decoder
<input type="checkbox"/>				Log Decoder
<input type="checkbox"/>				Decoder
<input type="checkbox"/>				Log Decoder
<input type="checkbox"/>				Decoder
<input type="checkbox"/>				Decoder
<input type="checkbox"/>				Decoder
<input type="checkbox"/>				Log Decoder
<input type="checkbox"/>				Log Decoder
<input type="checkbox"/>				Decoder
<input type="checkbox"/>				Decoder
<input type="checkbox"/>				Log Decoder

Reset Cancel Prev Next

6. To define a recurring feed task that executes repeatedly at specified intervals, during a specified date range.
  - a. Select **Recurring** in the **Feed Task Type** field.The Define Feed dialog includes the fields for a recurring feed.

Configure a Custom Feed

Define Feed    Select Services    Define Columns    Review

Feed Type ☒ CSV ☐ STIX

Feed Task Type ☐ Adhoc ☒ Recurring

Name \*

Upload As Csv File Feed ☐

URL \*  Verify

☐ Authenticated

☐ Use Proxy

Recur Every   ☐ Date Range

⌵ Advanced Options

XML Feed File  Browse

Separator

Comment

Reset Cancel Prev Next

- b. In the **URL** field, enter the URL where the feed data file is located, for example, `http://<hostname>/<feeddatafile>.csv`, and click **Verify**.

NetWitness Platform verifies the location where the file is stored, so that NetWitness Platform can check for the latest file automatically before each recurrence.

- c. (Optional) If the URL has restricted access and requires authentication using your username and password, select **Authenticated**.

NetWitness Platform provides your user name and password for authentication to the URL.

- d. If you want the NetWitness Platform server to access the Feed URL through a proxy, select **Use Proxy**. For more information on configuring a proxy, see the **Configure Proxy for NetWitness Platform** topic in the *System Configuration Guide*. By default, the **Use Proxy** checkbox is not selected.
- e. To define the interval for recurrence, do one of the following:

- Specify the number of minutes, hours, or days between recurrences of the feed.
  - Specify recurrence every week, and select the days of the week.
- f. To define the date range for the execution of the feed to recur, specify the **Start Date** and time and the **End Date** and time.

The screenshot shows the 'Configure a Custom Feed' dialog box with the 'Define Feed' tab selected. The dialog has four tabs: 'Define Feed', 'Select Services', 'Define Columns', and 'Review'. The 'Define Feed' tab contains the following fields and options:

- Feed Type:** Radio buttons for 'Default' (selected) and 'STIX'.
- Feed Task Type:** Radio buttons for 'Adhoc' and 'Recurring' (selected).
- Name \*:** Text input field containing 'TestFeed'.
- URL \*:** Text input field containing 'https://qasa2.netwitness.local/live/feeds'. A 'Verify' button is to the right.
- Authenticated:** Checkbox (unchecked).
- Use proxy:** Checkbox (unchecked).
- Recur Every:** A numeric input field with '3' and a dropdown menu showing 'Day (s)'.
- Date Range:** A collapsed section indicated by a downward arrow.
- Advanced Options:** A section with an upward arrow, containing:
  - XML Feed File:** A text input field with 'Select File' and a 'Browse' button.
  - Separator:** A text input field with a comma ','.
  - Comment:** A text input field with a hash '#'. A horizontal scrollbar is visible below this field.

At the bottom of the dialog are four buttons: 'Reset', 'Cancel', 'Prev', and 'Next'.

7. (Conditional) If you want to define a feed based on an XML feed file:

- Type the feed **Name**, select **Advanced Options**.

The Advanced Options fields are displayed.

- Select an XML feed file from the local file system, choose the **Separator** (default is comma), specify the **Comment** characters used in the feed data file (default is #) and click **Next**.

The Select Services dialog is displayed.

**Configure a Custom Feed**

Define Feed | **Select Services** | Define Columns | Review

**Services** | Groups

<input type="checkbox"/>		Name ^	Address	Type
<input type="checkbox"/>				Decoder
<input type="checkbox"/>				Decoder
<input type="checkbox"/>				Decoder
<input type="checkbox"/>				Log Decoder
<input type="checkbox"/>				Decoder
<input type="checkbox"/>				Log Decoder
<input type="checkbox"/>				Decoder
<input type="checkbox"/>				Decoder
<input type="checkbox"/>				Log Decoder
<input type="checkbox"/>				Log Decoder
<input type="checkbox"/>				Decoder
<input type="checkbox"/>				Decoder
<input type="checkbox"/>				Log Decoder
<input type="checkbox"/>				Decoder
<input type="checkbox"/>				Log Decoder

Reset Cancel Prev **Next**

8. To identify services on which to deploy the feed, do one of the following:

- Select one or more Decoders and Log Decoders, and click **Next**.
- Click the **Groups** tab and select a group. Click **Next**.

The Define Columns dialog is displayed.

9. To map columns in the Define Columns form:

- Define the Index type: **IP**, **IP Range**, or **Non IP**, and select the index column.
- (Conditional) If the index type is **IP** or **IP Range** and the IP address is in CIDR notation, select **CIDR**.
- (Conditional) If the index type is **Non IP**, additional settings are displayed. Select the service type and **Callback Keys**, and optionally select the **Truncate Domain** option.



The screenshot shows the 'Configure a Custom Feed' dialog box with the 'Define Columns' tab selected. The dialog has four tabs: 'Define Feed', 'Select Services', 'Define Columns', and 'Review'. Under 'Define Index', the 'Type' is set to 'Non IP' (selected with a radio button). The 'Index Column' is set to '1' (dropdown), 'Service Type' is '0' (dropdown), and 'Truncate Domain' is checked. The 'Callback Key (S)' dropdown is open, showing a list of keys: OS, access.point, accesses, action, alert, alert.id, alias.host, alias.ip, alias.ipv6, alias.mac, asn.dst, and asn.src. The 'Define Values' section shows a table with columns 'Column' and 'Key'. The 'Column' column has '1 (Index)' and the 'Key' column has 'SRM\_Sa' and 'ANCEST'. At the bottom are 'Reset', 'Cancel', 'Prev', and 'Next' buttons.

Configure a Custom Feed

Define Feed Select Services Define Columns Review

Define Index

Type ☐ IP ☐ IP Range ☒ Non IP

Index Column 1 Service Type 0 ☒ Truncate Domain

Callback Key (S)

Define Values

Column	Key
1 (Index)	SRM_Sa
	ANCEST

Reset Cancel Prev Next

- d. Select the language key to apply to the data in each column from the drop-down list. The meta displayed in the drop-down list is based on the meta available for the service define values. You can also add other meta based on advanced expertise.

**Configure a Custom Feed**

Define Feed   Select Services   **Define Columns**   Review

**Define Index**

Type ☐ IP ☐ IP Range ☒ Non IP


Index Column  Service Type  ☒ Truncate Domain

Callback Key (S)

**Define Values**

Column	1 (Index)	2	3	4
<b>Key</b>		<b>threat.source</b>	<b>threat.category</b>	<b>threat.desc</b>
SRM_SaaS_ES		MXASSETInterface	AddChange	EN
ANCESTOR		ASSETNUM	ASSETTAG	ASSETTYPE
		cent45	9164	
		cent45	9164	

Reset Cancel Prev **Next**

**Note:** When a custom feed gets converted into a context hublist, you must map at least one meta key with one or more meta types by mapping a column header with a meta. However, you can add or edit the entity mapping of a list by clicking  in the Lists tab. For more information, see the *Context Hub Configuration Guide*.

- e. Click **Next**.

The Review dialog is displayed.

The screenshot shows the 'Configure a Custom Feed' wizard in the 'Review' step. The wizard has four steps: Define Feed, Select Services, Define Columns, and Review. The 'Review' step displays the following information:

- Feed Details:**
  - Name: Testing
  - CSV File: AssetsImportCompleteSample.csv
- Service Details:**
  - Services: Log Decoder, Decoder
- Column Mapping Details:**
  - Index Type: Other
  - Callback Key(s): action
  - Truncate Domain: true
  - Service Type: 0
  - Value Columns:
    - 1 Index
    - 2 threat.source
    - 3 threat.category
    - 4 threat.desc

At the bottom of the wizard, there are four buttons: Reset, Cancel, Prev, and Finish.

10. Anytime before you click **Finish**, you can:
  - Click **Cancel** to close the wizard without saving your feed definition.
  - Click **Reset** to clear the data in the wizard.
  - Click **Next** to display the next form (if not viewing the last form).
  - Click **Prev** to display the previous form (if not viewing the first form)
11. Review the feed information, and if correct, click **Finish**.
12. Upon successful creation of the feed definition file, the Create Feed wizard closes, and the feed and corresponding token file are listed in the Feed grid and progress bar tracks completion. You can expand or collapse the entry to see how many services are included, and which services were successful.

**Note:** When you create a feed, and if there is no entity mapping done such as in case of custom metas, then those columns in the List will not have entity mappings in Context Hub. You have to manually map the entities from the List page.

### MetaCallback Feeds using CIDR Index Range for IPv4 and IPv6

This section describes how to use CIDR index ranges for IPv4 and IPv6 in custom MetaCallback feeds. As with other custom feeds, you must create feed data file in .csv format, and a feed definition file in .xml format.

**Note:** Using MetaCallback feeds with CIDR index ranges is supported only through the Advanced Configuration wizard or the REST interface.

The following example shows the contents of both a .csv file and an .xml file for a MetaCallback feed using CIDR index ranges for IPv4 or IPv6.

**.csv file:**

```
192.168.0.0/24, Sydney
192.168.1.0/24, Melbourne
```

**.xml file:**

```
<?xml version="1.0" encoding="UTF-8"?>
<FDF xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="feed-definitions.xsd">
  <FlatFileFeed name="ip_test" path="ip_test.csv" separator="," comment="#">
    <MetaCallback name="DstIP" valuetype="IPv4" apptype="0"
truncdomain="false">
      <Meta name="ip.dst"/>
    </MetaCallback>
    <LanguageKeys>
      <LanguageKey name="alert" valuetype="Text" />
    </LanguageKeys>
    <Fields>
      <Field index="1" type="index" range="cidr"/>
      <Field index="2" type="value" key="alert" />
    </Fields>
  </FlatFileFeed>
</FDF>
```

**Note:** To configure a CIDR index range for feeds with single or multiple MetaCallbacks of value type IPv4 or IPv6, the field of type index MUST contain a range attribute with range="cidr". Also, configuring "cidr" index ranges for feeds with MetaCallbacks of multiple different value types is not supported.

## Create a STIX Custom Feed

You can create a custom feed using a .csv or STIX formatted feed data file in RSA NetWitness Platform.

**Note:** NetWitness Platform supports Structured Threat Information Expression (STIX) 1.0, 1.1 and 1.2 versions only.

**Note:** From 10.6.1 or later, Security Analytics supports Structured Threat Information Expression (STIX).

Structured Threat Information Expression (STIX™) is a structured language for describing cyber threat information so it can be shared, stored, and analyzed in a consistent manner. For more information about STIX, see <https://stixproject.github.io/>.

**Caution:** If STIX recurring feed is configured and you update Security Analytics from 10.6.x to NetWitness Platform 11.0, you must re-configure the STIX recurring feed.

In NetWitness Platform, STIX (.xml) feed of type Indicator or Observable which contains the properties such as the IP addresses, File hashes, Domain names, URIs and Email addresses are supported. The properties values in the Equals operator is only supported. And, the attributes such as Type and Title are also read from the STIX (.xml). The STIX (.xml) with a single STIX\_Package is only supported.

TAXII (Trusted Automated eXchange of Indicator Information) is the main transport mechanism for cyber threat information represented in STIX. Using the TAXII services, organizations can share cyber threat information in a secure and automated manner.

The STIX and TAXII communities work closely together to ensure that they continue to provide a full stack for sharing threat intelligence.


Apart from TAXII server, STIX data can also reside on REST server and you can fetch STIX file from the REST server by providing the URL of the REST server. For example, <http://stixrestserver.internal.com>.

The feed data file (.csv or STIX (.xml)) and optionally the feed definition file (.xml) must be available on the local file system for an on-demand custom feed. For a recurring custom feed, the files must be available at a URL that is accessible to the NetWitness Platform server.

### To create a STIX custom feed:


1. Go to **Configure > Custom Feeds**.

The Feeds view is displayed.

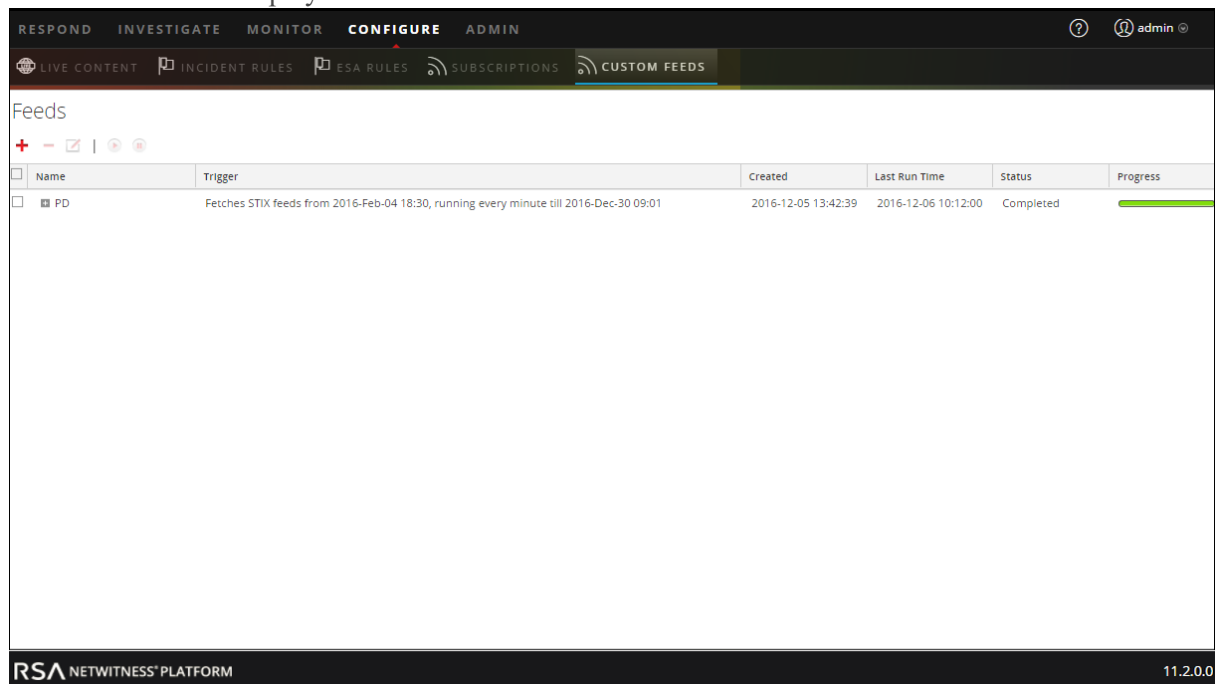

2. In the toolbar, click **+**.


The Setup Feed dialog is displayed.

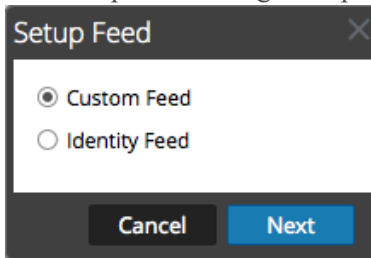

The Setup Feed dialog box is shown with a title bar 'Setup Feed' and a close button. It contains two radio buttons: 'Custom Feed' (selected) and 'Identity Feed'. At the bottom, there are 'Cancel' and 'Next' buttons.

3. To select the feed type, click **Custom Feed** and **Next**.

The Configure a Custom Feed wizard is displayed, with the Define Feed dialog open.

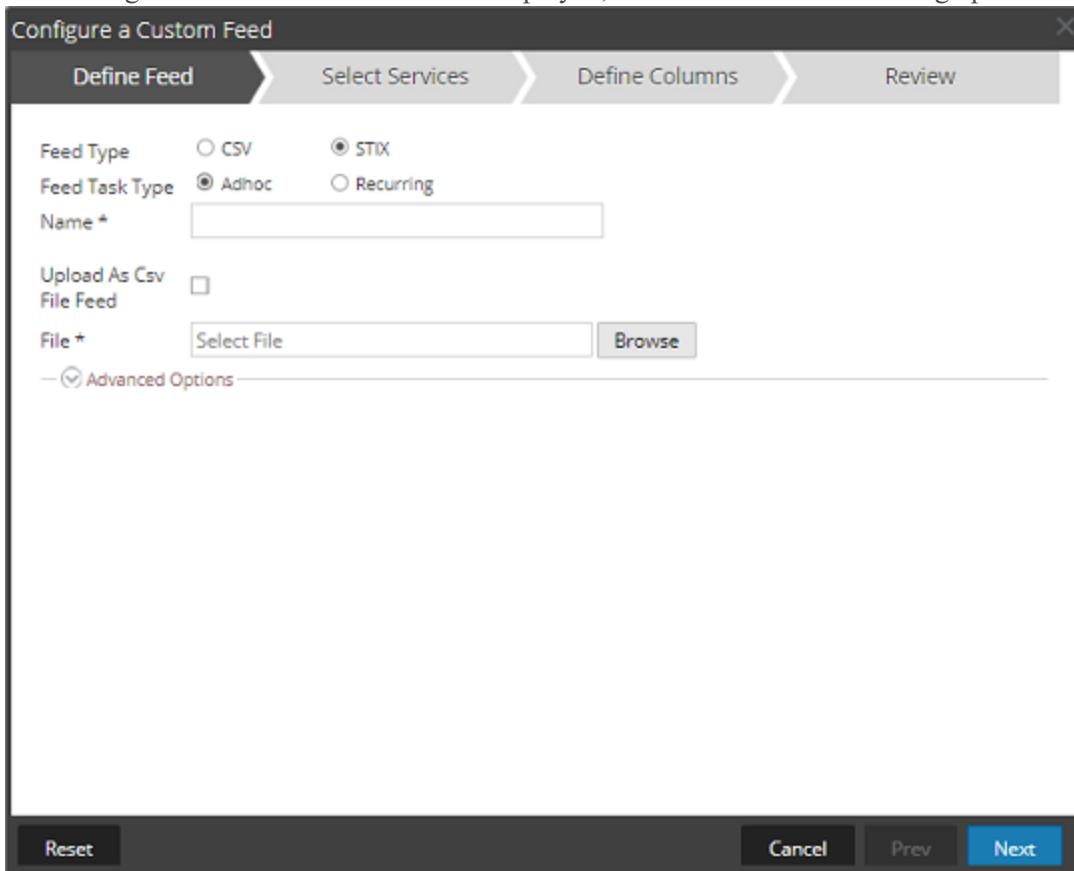

The 'Configure a Custom Feed' wizard is shown in the 'Define Feed' step. The wizard has four steps: 'Define Feed', 'Select Services', 'Define Columns', and 'Review'. The 'Define Feed' step contains the following fields and options:

- Feed Type:** Radio buttons for 'CSV' and 'STIX' (selected).
- Feed Task Type:** Radio buttons for 'Adhoc' (selected) and 'Recurring'.
- Name \***: A text input field.
- Upload As Csv File Feed:** A checkbox (unchecked).
- File \***: A text input field with 'Select File' and a 'Browse' button.
- Advanced Options:** A collapsed section indicated by a minus sign and a checkmark icon.

At the bottom of the wizard, there are 'Reset', 'Cancel', 'Prev', and 'Next' buttons.

4. To define a feed based on a STIX formatted .xml file, select **STIX** in the **Feed Type** field.
5. To define an on-demand feed task that executes once, select **Adhoc** in the **Feed Task Type** field and do one of the following:
  - a. (Conditional) To define a feed based on STIX formatted .xml file, type the feed **Name**, select a STIX formatted .xml content **File** from the local file system, and click **Next**.
  - b. (Conditional) To define a feed based on an XML feed file, select **Advanced Options**.

The Advanced Options are displayed:

The screenshot shows a dialog box titled "Configure a Custom Feed" with a close button (X) in the top right corner. The dialog has four tabs: "Define Feed" (active), "Select Services", "Define Columns", and "Review".

Under the "Define Feed" tab, the following options are visible:

- Feed Type:** Radio buttons for ☐ CSV and ☒ STIX.
- Feed Task Type:** Radio buttons for ☒ Adhoc and ☐ Recurring.
- Name \***: A text input field.
- Upload As Csv File Feed:** A checkbox that is currently unchecked.
- File \***: A text input field with "Select File" and a "Browse" button.
- Advanced Options:** A section with a collapse icon (upward arrow) and the text "Advanced Options". It contains:
  - XML Feed File:** A text input field with "Select File" and a "Browse" button.
  - Separator:** A dropdown menu showing "~".
  - Comment:** A dropdown menu showing "#".

At the bottom of the dialog, there is a horizontal scrollbar and a footer bar with four buttons: "Reset", "Cancel", "Prev", and "Next".

- c. Select an XML feed file from the local file system, choose the **Separator** (default is comma), and specify the **Comment** characters used in the feed data file (default is #), and click **Next**.
- d. The Select Services dialog is displayed. This is an example of the form for a feed based on a feed data file with no feed definition file. If you are defining a feed based on a feed definition file, the Define Columns tab is not needed.

Configure a Custom Feed

Define Feed
Select Services
Define Columns
Review

Services
Groups

**Note :** STIX content will exist in the Context Hub service by default and you are not allowed to deselect it. Select Decoders/Log Decoders to which STIX content must be pushed. If you do not wish to push STIX content to any Decoders/Log decoders at this point, click **Next**.

<input type="checkbox"/>		Name ^	Address	Type
<input type="checkbox"/>		STIX Content Hub	STIX Content Hub	Log Decoder
<input checked="" type="checkbox"/>		STIX Content Hub	STIX Content Hub	Context Hub
<input type="checkbox"/>		STIX Content Hub	STIX Content Hub	Log Decoder
<input type="checkbox"/>		STIX Content Hub	STIX Content Hub	Decoder

Reset
Cancel
Prev
Next

- To define a recurring feed task that executes repeatedly at specified intervals, during a specified date range.



- a. Select **Recurring** in the **Feed Task Type** field.

The Define Feed dialog includes the fields for a recurring feed.

**Configure a Custom Feed**

Define Feed | Select Services | Define Columns | Review

Feed Type: ☐ CSV ☒ STIX

Feed Task Type: ☐ Adhoc ☒ Recurring

Name \*:

Upload As Csv File Feed: ☐

URL \*:

☒ Trust All Certificates

Certificate File:

☐ Authenticated

☐ Use Proxy

☐ TAXII Enabled Server

Recur Every:    
☐ Date Range

☒ Advanced Options

- b. In the **URL** field, do one of the following:

- To define a recurring feed based on STIX which pulls STIX packages from a TAXII Server, enter the TAXII server's discovery service URL, for example, <http://hailataxii.com/taxii-discovery-service>.

**Note:** Context Hub service installed on Event Stream Analysis host must be reachable for the specified TAXII server.

- To define a recurring feed based on a STIX formatted .xml file using REST Server, enter the URL of the REST server where the STIX data file is located, for example,

<http://stixrestserver.internal.com>.

NetWitness Platform verifies the connection to the server, so that NetWitness Platform can check for the latest file automatically before each recurrence.

- c. If you do not want NetWitness Platform to verify the REST server's SSL certificate, Select **Trust All Certificate**. This option is enabled by default (checked)
- d. For client authentication with the REST URL, in the **Certificate** field, click **Browse** and select the self signed certificate. The supported certificate formats are .cer, .crt with Base64 & DER encoded files.
- e. (Optional) If the URL has restricted access and requires authentication using your username and password, select **Authenticated**.

NetWitness Platform provides your user name and password for authentication to the URL.

- f. Select **TAXII Enabled Server**, if you want to select a TAXII collection from the list. For a valid URL, one or more TAXII collections that contains the STIX data file is displayed based on your credentials. Select the required TAXII collection from the list. Only one collection

can be added from a TAXII server for a feed.

**Note:** Though multiple feeds from multiple TAXII servers are supported, only one account (username and password) is supported per TAXII server.

- g. If you want the NetWitness Platform server to access the Feed URL through a proxy, select **Use Proxy**. For more information on configuring a proxy, see the **Configure Proxy for NetWitness Platform** topic in the *System Configuration Guide*. By default, the **Use Proxy** checkbox is not selected.

- h. (Optional) Click **Verify** to test the settings.

**Note:** Make sure all the required connection parameters such as Authentication, Proxy, Certificate trust, TAXII Enabled Server etc. are configured before you click **Verify**.

- i. To define the interval of recurrence for pushing to Decoder or Log Decoder, do one of the following:
- Specify the number of minutes, hours, or days between recurrences of the feed.
  - Specify recurrence every week, and select the days of the week.
- j. To define the date range for the execution of the feed to recur, specify the **Start Date** and time and the **End Date** and time. The Start Date should be defined from when you want to fetch the data. Make sure that the **Start Date** is not before 180 days from today.
7. (Optional) If you want to define a feed based on an XML feed file:
- Type the feed **Name**, select **Advanced Options**.  
The Advanced Options fields are displayed.
  - Select an XML feed file from the local file system, choose the **Separator** (default is comma), specify the **Comment** characters used in the feed data file (default is #).
  - In the **Remove STIX data older than** field, specify the number of days for which STIX packages pulled from TAXII server is to be stored. The STIX packages older than the specified number of days is deleted automatically.
  - Click **Next**.  
The Select Services dialog is displayed.
8. To identify services on which to deploy the feed, do one of the following:
- a. Select one or more Decoders and Log Decoders, and click **Next**.
- b. In case of STIX feed, Context Hub will be selected by default and you are not allowed to deselect it. In addition, you can select one or more Decoders and Log Decoders and click **Next** or Click the **Groups** tab and select a group. Click **Next**.

Configure a Custom Feed

Define Feed

Select Services






Define Columns

Review

Services

Groups

**Note :** STIX content will exist in the Context Hub service by default and you are not allowed to deselect it. Select Decoders/Log Decoders to which STIX content must be pushed. If you do not wish to push STIX content to any Decoders/Log decoders at this point, click **Next**.

<input type="checkbox"/>		Name ^	Address	Type
<input type="checkbox"/>		STIX (Log Decoder)	STIX (Log Decoder)	Log Decoder
<input checked="" type="checkbox"/>		STIX (Context Hub)	STIX (Context Hub)	Context Hub
<input type="checkbox"/>		STIX (Log Decoder)	STIX (Log Decoder)	Log Decoder
<input type="checkbox"/>		STIX (Decoder)	STIX (Decoder)	Decoder

Reset

Cancel

Prev

Next

If the data from the STIX server is large, the following message is displayed:

Configure a Custom Feed

Define Feed Select Services Define Columns Review

Services Groups

*Note : STIX content will exist in the Context Hub service by default and you are not allowed to deselect it. Select Decoders/Log Decoders to which STIX content must be pushed. If you do not wish to push STIX content to any Decoders/Log decoders at this point, click Next.*

<input type="checkbox"/>	Name ^	Address	Type
<input checked="" type="checkbox"/>	CH	127.0.0.1	Other
<input type="checkbox"/>	LD	10.31.165.66	Log Decoder
<input checked="" type="checkbox"/>	LD85	10.31.165.85	Log Decoder

Fetching sample data is taking longer than expected.  
Choose one of the following options

[Continue to Wait](#) [Map without Sample data](#)

Reset Cancel Prev Next

- If you click **Continue to Wait**, it continues to wait till the sample data is fetched or timeout (10 minutes) whichever is sooner. In case of timeout no sample data is retrieved even after 10 minutes.
- If you click **Map Without Sample data**, the mapping column is displayed without any sample data.

The Define Columns dialog is displayed.

9. To map columns in the Define Columns form:

- Define the Index type: **IP**, **IP Range**, or **Non IP**, and select the index column.
- (Optional) If the index type is **IP** or **IP Range** and the IP address is in CIDR notation, select **CIDR**.
- (Optional) If the index type is **Non IP**, additional settings are displayed. Select the service type

and **Callback Keys**, and optionally select the **Truncate Domain** option.

**Configure a Custom Feed**

Define Feed   Select Services   **Define Columns**   Review

**Define Index**

Type ☒ IP ☐ Non IP

Index Column  ☐ CIDR

**Define Values**

Column	1	2	3	4
Key	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
	Indicator Title	Indicator Description	Observable Title	Observable Description
	This domain p57A5E9...	torstatus.blutmagie.de...	IP: 87.145.233.207	IPv4: 87.145.233.207   ...
	This domain p57A5E9...	torstatus.blutmagie.de...	Domain: p57A5E9CF.d...	Domain: p57A5E9CF.d...

Reset Cancel Prev **Next**

**Note:**

- If the **Index Type** is Non IP, you can select multiple index columns in the **Index Column(S)**. The values from all the selected columns are merged in the first index column that you selected and the merged values are pushed to the Log Decoder for parsing. For example, in the **Index Column(S)** if you select 2,4,7 as index columns the values from the 2,4 and 7 columns are merged in the column 2 and the values are pushed to Log Decoder for parsing.
- Indexing cannot be done for the columns such as Indicator Title, Indicator Description, Observable Title, Observable Description, as the look up cannot be performed for those columns.

- Select the language key to apply to the data in each column from the drop-down list. The meta displayed in the drop-down list is based on the meta available for the service define values. You can also add other meta based on advanced expertise.
- Click **Next**.

The Review dialog is displayed.

**Configure a Custom Feed**

Define Feed > Select Services > Define Columns > **Review**

**Feed Details**

Name	Both2		
URL	http://10.31.204.238/taxii-discovery-service		
TAXII Collection	admin.blacklisted.ip		
Recurrence Type	Every 1 Minute (s)		
Date Range	Start Date	End Date	
	2016-03-05T00:00:00	2016-12-05T13:45:55	

**Service Details**

Services	CH-241, Network Decoder - Decoder, LD - Log Decoder
----------	---

**Column Mapping Details**

Index Type	IP
CIDR	false
Value Columns	

1  
ind.title

2  
ind.desc

3  
obs.title

4  
obs.desc

5  
Index

Reset
Cancel
Prev
Finish

10. Anytime before you click **Finish**, you can:
  - Click **Cancel** to close the wizard without saving your feed definition.
  - Click **Reset** to clear the data in the wizard.
  - Click **Next** to display the next dialog (if not viewing the last form).
  - Click **Prev** to display the previous dialog (if not viewing the first form)
11. Review the feed information, and if correct, click **Finish**.
12. Upon successful creation of the feed definition file, the Create Feed wizard closes, and the feed and corresponding token file are listed in the Feed grid and progress bar tracks completion. You can expand or collapse the entry to see how many services are included, and which services were successful.

RESPOND INVESTIGATE MONITOR <b>CONFIGURE</b> ADMIN							
LIVE CONTENT INCIDENT RULES ESA RULES SUBSCRIPTIONS <b>CUSTOM FEEDS</b>							
Feeds							
+ - [icon] [icon] [icon]							
<input type="checkbox"/>	Name	Trigger	Disk Usage	Created	Last Run Time	Status	Progress
<input type="checkbox"/>	DataCleanup6months	Fetches STIX feeds from 2016-Sep-12 18:30, running every 5 minutes	1.11 MB	2017-09-12 09:49:52	2017-09-18 09:05:00	Completed	<div></div>
<input type="checkbox"/>	DataCleanup1month	Fetches STIX feeds from 2016-Sep-12 18:30, running every 5 minutes	0.25 MB	2017-09-12 10:08:00	2017-09-18 09:05:00	Completed	<div></div>
<input type="checkbox"/>	ABC	Fetches STIX feeds from 2017-Aug-14 11:46, running every 5 minutes	40.36 MB	2017-09-13 10:24:18	2017-09-18 09:06:23	Completed	<div></div>

**Note:** Health and Wellness raises alerts when the available heap memory of Context Hub server is critically low. If the status of Context Hub server is Unhealthy due to low memory. For more information on how to troubleshoot `OutOfMemoryError` on Contexthub Server, see "Troubleshooting" in the *Live Services Management Guide*.

### MetaCallback Feeds using CIDR Index Range for IPv4 and IPv6

This section describes how to use CIDR index ranges for IPv4 and IPv6 in custom MetaCallback feeds. As with other custom feeds, you must create feed data file in .csv format, and a feed definition file in .xml format.

**Note:** Using Metacallback feeds with CIDR index ranges is supported only through the Advanced Configuration wizard or the REST interface.

The following example shows the contents of both a .csv file and an .xml file for a MetaCallback feed using CIDR index ranges for IPv4 or IPv6.

#### .csv file:

```
192.168.0.0/24, Sydney
192.168.1.0/24, Melbourne
```

#### .xml file:

```
<?xml version="1.0" encoding="UTF-8"?>
<FDF xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="feed-definitions.xsd">
<FlatFileFeed name="ip_test" path="ip_test.csv" separator="," comment="#">
  <MetaCallback name="DstIP" valuetype="IPv4" apptype="0"
truncdomain="false">
    <Meta name="ip.dst"/>
  </MetaCallback>
</FlatFileFeed>
</FDF>
```



```

        <LanguageKey name="alert" valuetype="Text" />
    </LanguageKeys>
    <Fields>
        <Field index="1" type="index" range="cidr"/>
        <Field index="2" type="value" key="alert" />
    </Fields>
</FlatFileFeed>
</FDF>


```


**Note:** To configure a CIDR index range for feeds with single or multiple MetaCallbacks of value type IPv4 or IPv6, the field of type index **MUST** contain a range attribute with range="cidr". Also, configuring "cidr" index ranges for feeds with MetaCallbacks of multiple different value types is not supported.


## Creating and Managing an Identity Feed


You can easily create an Identity feed and populate it to selected Decoders and Log Decoders. After completing this procedure, you will have created an Identity feed.

### To create an identity feed:

1. Add a destination for the feed.
  - a. Go to **ADMIN > Services** and in the **Services** list
  - b. Select a **Log Collector** service, and select  **View > Config**.
  - c. Select the **Event Destinations** tab.
  - d. In the **Select Event Destinations** field, select **Identity Feed**.

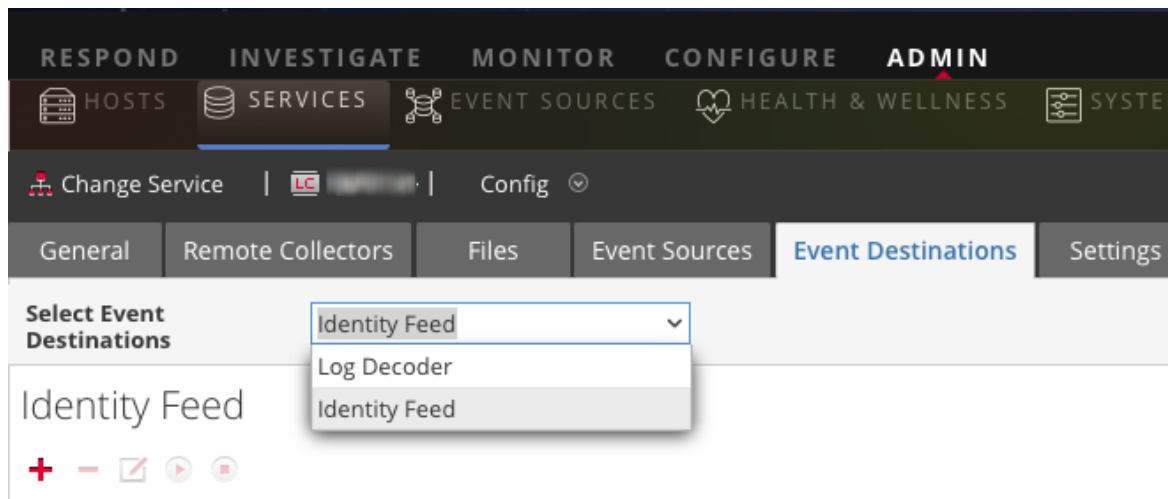

- e. Click  and enter a unique name for the feed.  
The Queue name identifies the feed within the Log Collector. Use the name of the feed for the Queue.

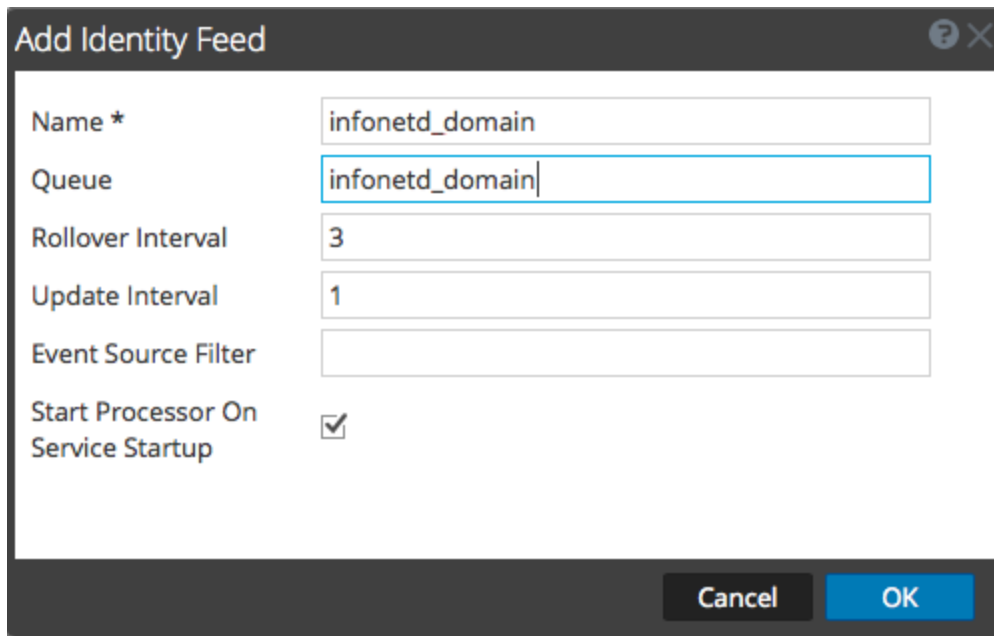

The 'Add Identity Feed' dialog box contains the following fields and options:

- Name \***: infonetd\_domain
- Queue**: infonetd\_domain
- Rollover Interval**: 3
- Update Interval**: 1
- Event Source Filter**: (empty)
- Start Processor On Service Startup**: ☒


Buttons: Cancel, OK

- f. Click **OK**.
2. Test generation of messages.
  - a. Have users log into Windows boxes on the domain to generate the appropriate log messages on the domain controllers for testing.
  - b. Verify that data is written to the feed files. SSH to the Log Decoder/Collector or Virtual Log Collector being configured. Navigate to `/var/netwitness/logcollector/runtime/identity-feed` and verify that the `Identity_deploy` files are getting populated with data.

```
[root@tps-reports identity-feed]# pwd
/var/netwitness/logcollector/runtime/identity-feed
[root@tps-reports identity-feed]# ls -lah
total 20K
drwxr-xr-x. 2 root root 109 Nov  8 18:06 .
drwxr-xr-x. 8 root root 4.0K Nov 12 23:14 ..
-rw-r--r--. 1 root root 106 Nov 13 15:24 identity_deploy.csv
-rw-----. 1 root root 408 Nov 13 15:24 identity_deploy.feed
-rw-r--r--. 1 root root 981 Nov  8 09:06 identity_deploy.xml
-rw-r--r--. 1 root root 158 Nov 13 15:17 identitycache.csv
[root@tps-reports identity-feed]#
```

- c. Open up a web browser (Non-Internet Explorer browsers preferred) and log in to the REST interface of the Log Collector. Use administrative credentials when logging in. For example, if the IP address of your Log Collector is 192.168.99.66, the URL would be:
  - SSL not enabled: **`http://192.168.99.66:50101/event-processors`**
  - SSL enabled: **`https://192.168.99.66:50101/event-processors`**


The browser screen should look like this:

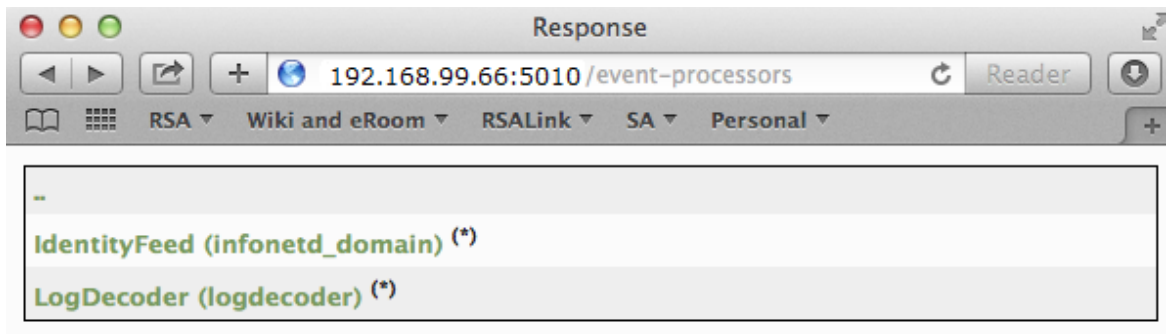

Notice the screen contains the name of the identity feed you created earlier (`infonetd_domain`, in this example).

For the identity feed to function correctly, port 50101 must be active on the Log Collector, and you must determine whether SSL encryption is active.

- d. Go to **ADMIN** > **Services** > *<Log Collector being setup>* > **View** > **Explore**.
- e. In the left pane, expand **rest** > **config**.

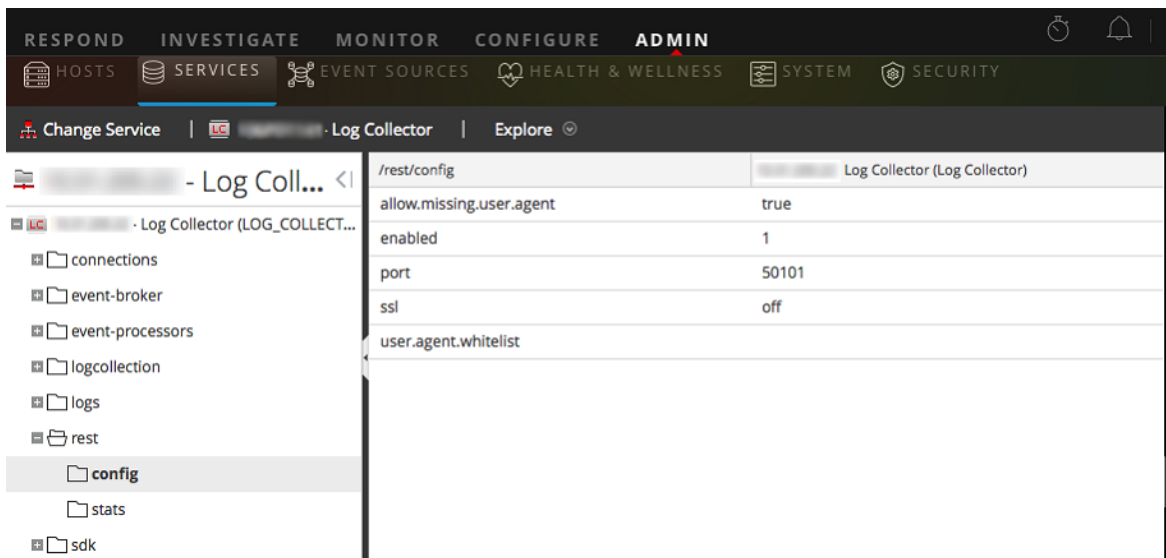


For REST to be active, **enabled** must be set to **1**.

- f. Note the value for **ssl**. If SSL should be enabled for your environment, this must be set to **on**.

**Note:** If you changed the setting for either the **enabled** or **ssl** option you must restart the Log Collector service before moving forward.


3. Go to **CONFIGURE** > **Custom Feeds**.

The Feeds dialog is displayed.

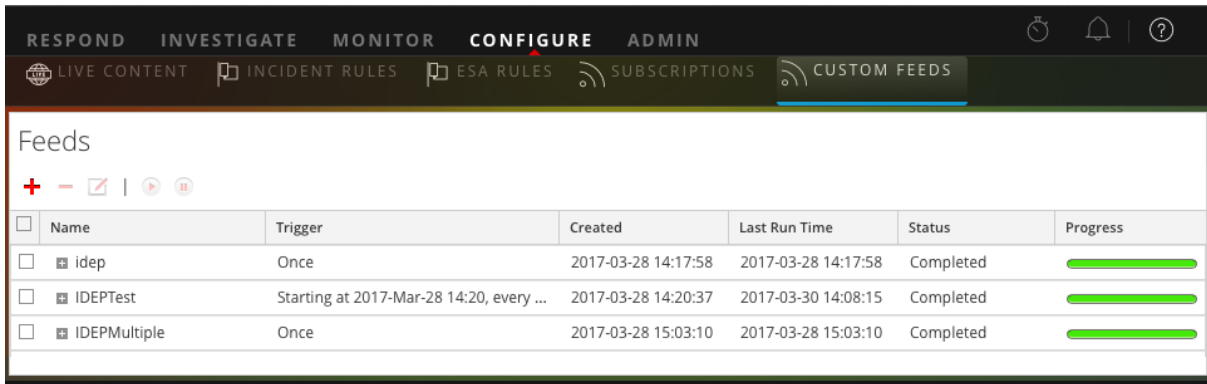

4. In the toolbar, click **+**.

The Setup Feed dialog is displayed.

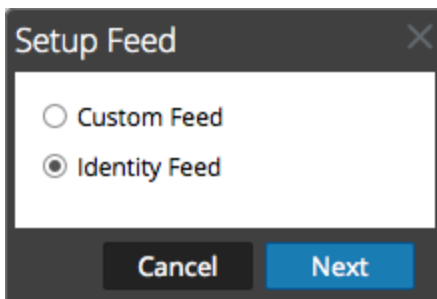

5. Ensure **Identity Feed** is selected and click **Next**.

The Configure Identity Feed panel opens with the **Define Feed** tab displayed.

6. (Conditional) You can create an on-demand or recurring feed.
- To define an on-demand Identity feed task that executes once, select **Adhoc** in the **Feed Task Type** field, type the feed **Name**, and browse for and open the feed.
  - To define a recurring Identity Feed task that executes on a recurring basis, select **Recurring** in the **Feed Task Type** field.

The **Define Feed** dialog includes the fields for a recurring feed.

**Configure Identity Feed**

Define Feed | Select Services | Review

Feed Task Type ☐ Adhoc ☒ Recurring

Name \*

URL \*

☒ Authenticated User Name  Password

☐ Use proxy

Recur Every

☒ Date Range

Start Date   End Date

**Note:** RSA NetWitness Platform verifies the location where the file is stored, so that NetWitness Platform can check for the latest file automatically before each recurrence.

7. Fill in and verify the URL field.

- a. In the **URL** field, enter the URL where the feed data file is located. This is the REST API interface that was setup earlier. Make sure you have the following information to construct the URL:

- The IP address of the Log Collector being used to construct the Identity Feed file.
- The identity queue name, as set in [step 2c](#).
- Whether or not SSL is enabled on the Log Collector REST port, as set in [step 2f](#).

You can construct this value as follows:

- SSL enabled: `https://<LogCollector>:50101/event-processors/<ID Event processor name>?msg=getFile&force-content-type=application/octet-stream&expiry=600`
- SSL not enabled: `http://<LogCollector>:50101/event-processors/<ID Event processor name>?msg=getFile&force-content-type=application/octet-stream&expiry=600`

So, using the example from earlier, the complete value that you would enter into this field is as follows:

```
http://192.168.99.66:50101/event-processors/infonetd_
domain?msg=getFile&force-content-type=application/octet-
stream&expiry=600?msg=getFile&force-content-
type=application/octet-stream&expiry=600
```

- b. For the URL verification to work correctly, it is important that the NetWitness Platform UI server can access the Log Collector's REST API port (50101). This can be tested by going to the NetWitness Platform UI server via SSH. Once there, run the following command:

- SSL enabled: `curl -vk https://<ip of log collector>:50101`
- SSL not enabled: `curl -v http://<ip of log collector>:50101`

If the `curl` command does not connect then there may be a network firewall or routing issue between the NetWitness Platform UI server and the Log Collector.

Example of Bad connection:

```
* About to connect() to 192.168.99.66 port 50105 (#0)
* Trying 192.168.99.66... No route to host
* couldn't connect to host
* Closing connection #0
curl: (7) couldn't connect to host
```

Example of Good connection:

```
* About to connect() to 192.168.99.66 port 50105 (#0)
* Trying 192.168.99.66... connected
* Connected to 192.168.99.66 (192.168.99.66) port 50105 (#0)
> GET / HTTP/1.1
> User-Agent: curl/7.19.7 (x86_64-redhat-linux-gnu)
libcurl/7.19.7 NSS/3.19.1 Basic ECC zlib/1.2.3 libidn/1.18
libssh2/1.4.2
> Host: 192.168.99.66:50105
> Accept: */*
>
< HTTP/1.1 401 Unauthorized
< Content-Length: 71
< Connection: Keep-Alive
< Pragma: no-cache
< Expires: -1
< Cache-Control: no-cache, no-store, must-revalidate
< WWW-Authenticate: Basic realm="NetWitness"
< Content-Type: text/xml; charset=utf-8
<
<?xml version="1.0" encoding="utf-8"?>
<error>401 Unauthorized</error>
```

```
* Connection #0 to host 192.168.99.66 left intact
* Closing connection #0
```


8. The REST API requires a username and password when attempting to pull the `identity_deploy.csv` file from the Log Collector. This can be any username and password that is available on the service itself. For more information, see the "Services Security View" topic in the *Hosts and Services Guide*.

To see which accounts are available, go to **ADMIN > Services > <log collector being setup> > Actions > View > Security**.

Under the Users table, you see all the users that can be used in this step. It is suggested that a separate user account is created specifically for this setup, and is used nowhere else in the environment, for added security. For details, see "Add a User and Assign a Role" in the *System Security and User Management Guide*. (Go to the [Master Table of Contents](#) to find all NetWitness Platform Logs & Network 11.x documents.)

9. To define the interval for recurrence, do one of the following:
  - Specify the number of minutes, hours, or days between recurrences of the feed.
  - To define the date range for the execution of the feed to recur, specify the **Start Date** and time and the **End Date** and time.
10. If using SSL encryption, you need to install the REST API SSL certificate for the Log Collector into the NetWitness Platform UI server. For more information, see [Import the SSL Certificate](#).  
If, after importing the SSL certificate, the verification of the URL still fails, see [Cannot Verify Identity Feed URL](#).
11. Click **Verify** to verify your identity feed configuration before you proceed to the Select Services dialog.
12. Click **Next**.

The Select Services dialog is displayed.

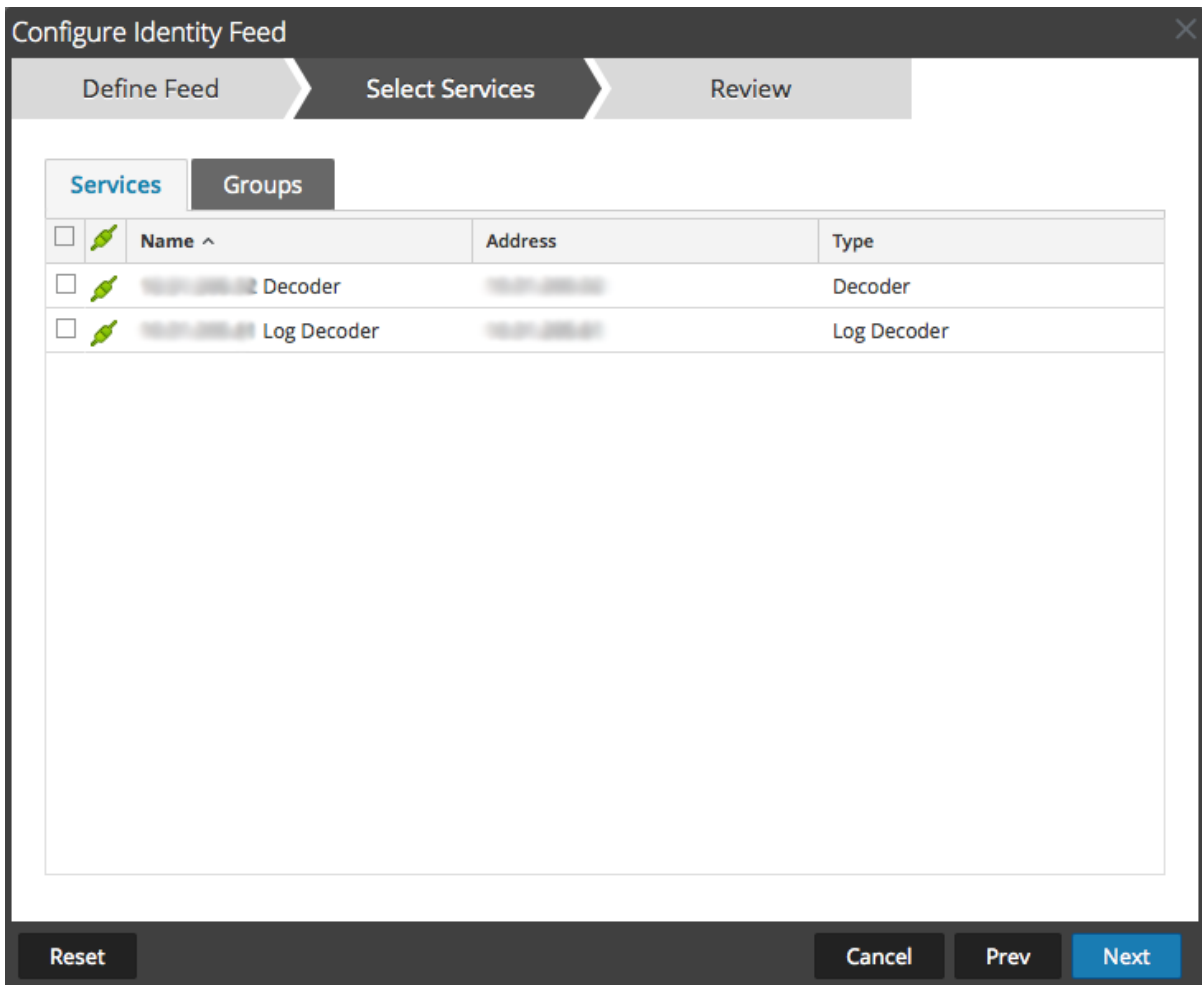

The image shows a 'Configure Identity Feed' dialog box with three tabs: 'Define Feed', 'Select Services', and 'Review'. The 'Select Services' tab is active. It contains two sub-tabs: 'Services' and 'Groups'. The 'Services' sub-tab is selected, displaying a table with two rows of services. Each row has a checkbox, a green leaf icon, a name, an address, and a type. The first row is 'Decoder' and the second is 'Log Decoder'. At the bottom of the dialog are four buttons: 'Reset', 'Cancel', 'Prev', and 'Next'.

<input type="checkbox"/>		Name ^	Address	Type
<input type="checkbox"/>		Decoder		Decoder
<input type="checkbox"/>		Log Decoder		Log Decoder

13. To identify services on which to deploy the feed, select one or more Decoders and Log Decoders and click **Next**.
14. Click the **Groups** tab, select a group, and click **Next**.  
The Review dialog is displayed.



The screenshot shows a 'Configure Identity Feed' wizard window with a dark header and a light body. The header has three tabs: 'Define Feed', 'Select Services', and 'Review'. The 'Review' tab is active. Below the tabs, there are two sections: 'Feed Details' and 'Service Details'. The 'Feed Details' section has two rows: 'Name' with the value 'Testing' and 'Feed File' with the value 'zip sample.zip'. The 'Service Details' section has one row: 'Services' with the value '16.01.2016.02 Decoder'. At the bottom of the window, there are four buttons: 'Reset', 'Cancel', 'Prev', and 'Finish'.

Feed Details	
Name	Testing
Feed File	zip sample.zip

Service Details	
Services	16.01.2016.02 Decoder

**Note:** If a group of devices with Decoders and Log Decoders is used to create recurring or custom feeds and this group is deleted, you can edit the feed and add a new group to the feed.

15. Anytime before you click **Finish**, you can:
  - Click **Cancel** to close the wizard without saving your feed definition.
  - Click **Reset** to clear the data in the wizard.
  - Click **Next** to display the next form (if not viewing the last form).
  - Click **Prev** to display the previous form (if not viewing the first form).

16. Review the feed information, and if correct, click **Finish**.

Upon successful creation of the feed definition file, the Create Feed wizard closes, and the feed and corresponding token file are listed in the Feed grid and progress bar tracks completion. You can expand or collapse the entry to see how many services are included, and which services were successful.

RESPOND INVESTIGATE MONITOR <b>CONFIGURE</b> ADMIN							
LIVE CONTENT INCIDENT RULES ESA RULES SUBSCRIPTIONS <b>CUSTOM FEEDS</b>							
Feeds							
+ -   [ ] [ ] [ ]							
<input type="checkbox"/>	Name	Trigger	Disk Usage	Created	Last Run Time	Status	Progress
<input type="checkbox"/>	DataCleanup6months	Fetches STIX feeds from 2016-Sep-12 18:30, running every 5 minutes	1.11 MB	2017-09-12 09:49:52	2017-09-18 09:05:00	Completed	<div></div>
<input type="checkbox"/>	DataCleanup1month	Fetches STIX feeds from 2016-Sep-12 18:30, running every 5 minutes	0.25 MB	2017-09-12 10:08:00	2017-09-18 09:05:00	Completed	<div></div>
<input type="checkbox"/>	ABC	Fetches STIX feeds from 2017-Aug-14 11:46, running every 5 minutes	40.36 MB	2017-09-13 10:24:18	2017-09-18 09:06:23	Completed	<div></div>

## Import the SSL Certificate

If SSL is configured on the Identity feed's Log Collector, follow these steps to import the Log Collector's SSL certificate into the NetWitness Platform UI server key store. If this certificate is not imported, the NetWitness Platform UI server will be unable to pull the Identify feed file from the Log Collector.

1. To pull the SSL certificate off the Log Collector, SSH into the NetWitness Platform UI server and run the following command:

```
echo -n | openssl s_client -connect <HOST>:<PORT> | sed -ne '/-
BEGIN CERTIFICATE-/,/-END CERTIFICATE-/p' > /tmp/<SERVERNAME>.cert
```

This command saves the SSL certificate to /tmp/<SERVERNAME>.cert.

For example:

```
echo -n | openssl s_client -connect 192.168.99.66:50101 | sed -ne
'/-BEGIN CERTIFICATE-/,/-END CERTIFICATE-/p' >
/tmp/logcollector.cert
```

2. To import the SSL certificate into the NetWitness Platform UI server, SSH into the UI server and run the following command:

```
keytool -importcert -alias <name an alias for the cert> -file <the
cert file pathname> -keystore /etc/pki/java/cacerts
```

For example:

```
keytool -importcert -alias logcollector01 -file
/tmp/logcollector.cert -keystore /etc/pki/java/cacerts
```

3. The system requests a password. Enter the password for the keystore on the NetWitness Platform UI server, not for the jetty keystore. The default password is **changeit**.
4. Restart **jetty** to allow jetty to read the new certificate in the store.

### Cannot Verify Identity Feed URL

If the Identity feed URL cannot be verified, and you are using SSL, make sure you followed the steps in [Import the SSL Certificate](#).

If there are still issues, it is possible that the internal name of the certificate does not match the hostname of the Log Collector. The following procedure checks this.


1. SSH to the NetWitness Platform UI server.
2. Run the following command to output the CN name of the SSL cert:

```
echo -n | openssl s_client -connect <log decoder>:50101 | sed -ne  
'/BEGIN CERTIFICATE-/,/-END CERTIFICATE-/p'
```

Example:


```
echo -n | openssl s_client -connect salogdecoder01:50101 | sed -ne  
'/BEGIN CERTIFICATE-/,/-END CERTIFICATE-/p'
```

3. Retrieve the CN name of the SSL certificate.

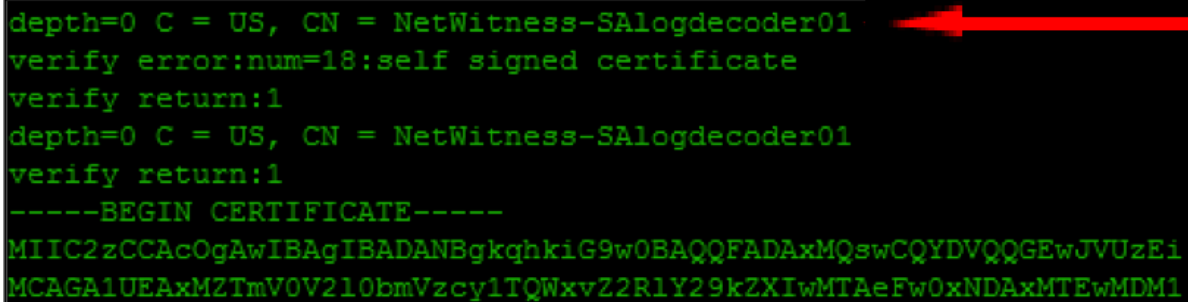

```
depth=0 C = US, CN = NetWitness-SALogdecoder01  
verify error:num=18:self signed certificate  
verify return:1  
depth=0 C = US, CN = NetWitness-SALogdecoder01  
verify return:1  
-----BEGIN CERTIFICATE-----  
MIIC2zCCAcOgAwIBAgIBADANBgkqhkiG9w0BAQQFADAxMQswCQYDVQQGEwJVUzEi  
MCAGA1UEAxMZTmV0V2l0bmVzcy1TQWxvZ2RlY29kZXIwMTAeFw0xNDAxMTEwMDM1
```

4. Edit the `/etc/hosts` file and add the IP address and CN name to the file.

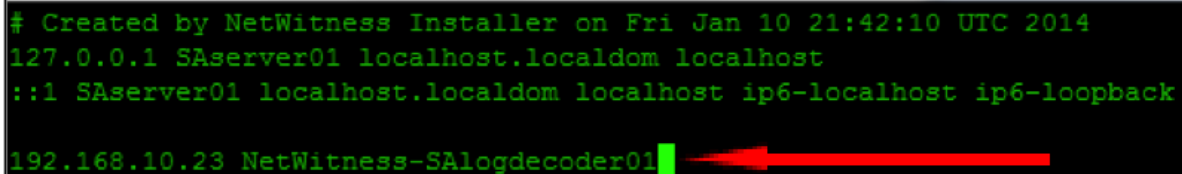

```
# Created by NetWitness Installer on Fri Jan 10 21:42:10 UTC 2014  
127.0.0.1 SAserver01 localhost.localdom localhost  
::1 SAserver01 localhost.localdom localhost ip6-localhost ip6-loopback  
192.168.10.23 NetWitness-SALogdecoder01
```

5. Restart the network service on the appliance.
6. Confirm that the name placed in the `/etc/hosts` file is used instead of the FQDN or IP address in the Identity feed URL.
7. Re-verify the Identity feed URL.

### Investigating an Identity Feed

An identity feed tracks interactive log on events from the Windows operating system. Identity feeds do not track interactive log off events.

In order for an identity feed to process events and tag them, the events need to be collected using a Windows Log Collection module where an Active Domain Controller/non-Domain Controller is configured. Note that identity feeds can only be processed via an Identity Feed Event Processor.


**Note:** An identity feed only tracks one log in at a time. If two users log in to a system at the same time, the second user will overwrite the first user's data in the identity feed.

Once you have created an identity feed, you can view the results by investigating the feed.

### To investigate a configured identity feed:


1. Go to **INVESTIGATE > Navigate**.

If no default service is selected, the Investigate dialog is displayed.

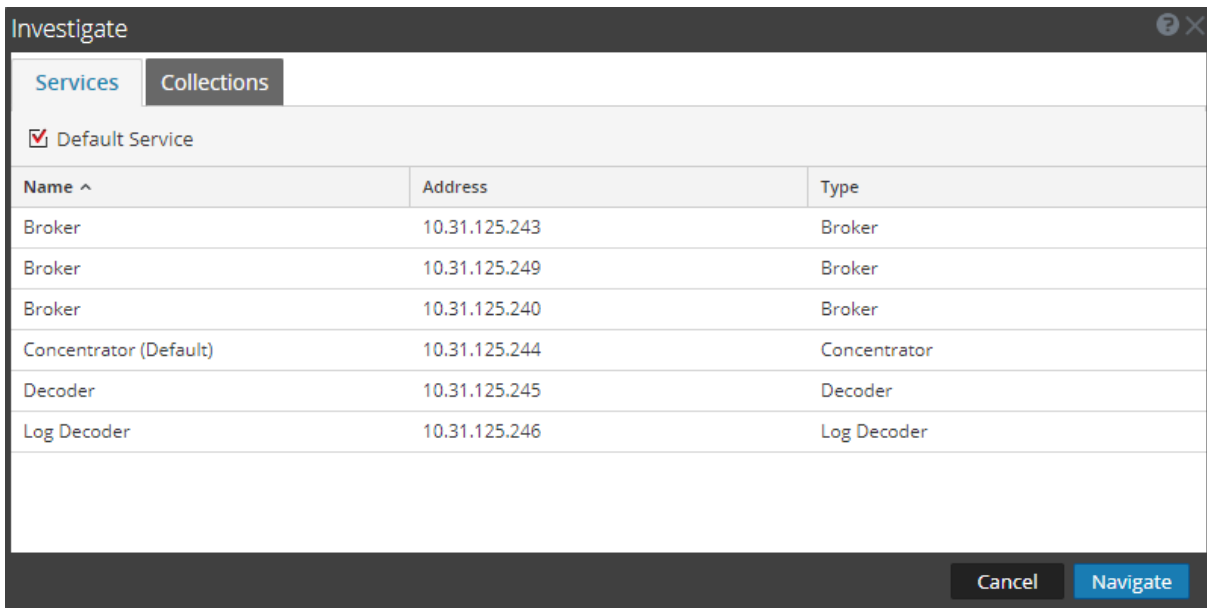

2. Select a service, usually a Concentrator, and click **Navigate**.
3. Select **Load Values** to retrieve meta data.

In the Values panel, scroll down to find the Meta Keys shown in the following illustration.

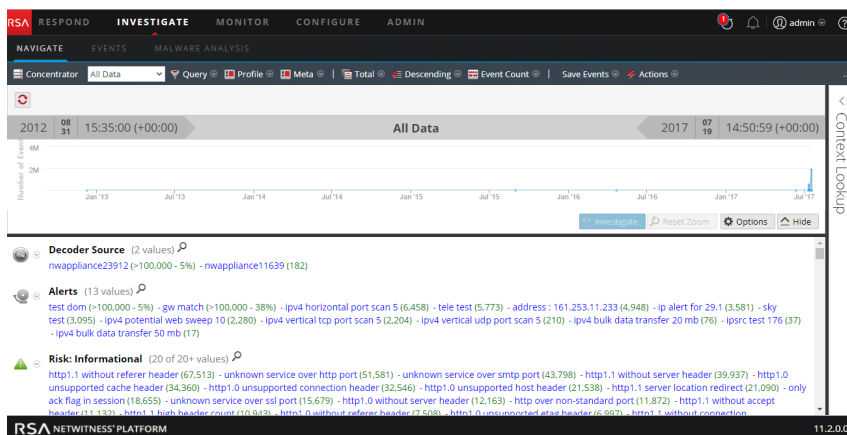

The identity feed provides information to selected Decoders and Log Decoders. It associates the Host IP data from the Windows operating system to the user logging into that Host in order to tag all logs associated with that IP and investigate.

## Editing a Feed

This topic provides instructions for editing a custom feed using the Custom Feed Wizard.


Completing this procedure will result in:

- An existing custom feed opened.
- The feed (**.zip** format) or the file used to create the feed (**.csv** or **.xml**) downloaded and edited.
- The feed recreated with the updated file and new feed specifications.

### To edit an existing feed:

1. Go to **CONFIGURE > CUSTOM FEEDS**.

The Custom Feeds dialog is displayed.

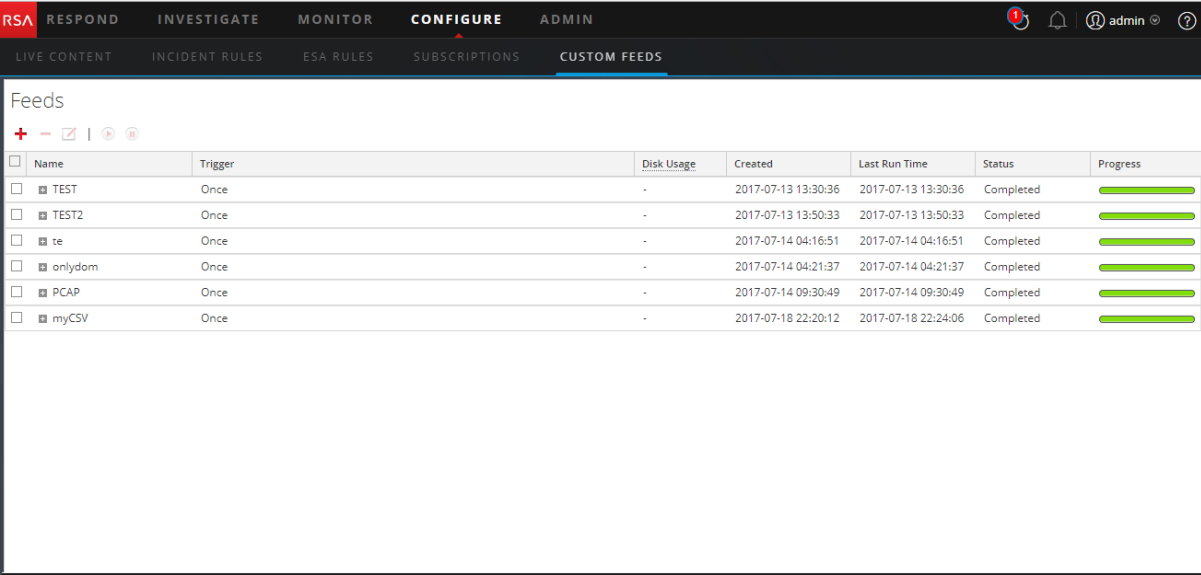

	Name	Trigger	Disk Usage	Created	Last Run Time	Status	Progress
<input type="checkbox"/>	TEST	Once	-	2017-07-13 13:30:36	2017-07-13 13:30:36	Completed	<div></div>
<input type="checkbox"/>	TEST2	Once	-	2017-07-13 13:50:33	2017-07-13 13:50:33	Completed	<div></div>
<input type="checkbox"/>	te	Once	-	2017-07-14 04:16:51	2017-07-14 04:16:51	Completed	<div></div>
<input type="checkbox"/>	onlydom	Once	-	2017-07-14 04:21:37	2017-07-14 04:21:37	Completed	<div></div>
<input type="checkbox"/>	PCAP	Once	-	2017-07-14 09:30:49	2017-07-14 09:30:49	Completed	<div></div>
<input type="checkbox"/>	myCSV	Once	-	2017-07-18 22:20:12	2017-07-18 22:24:06	Completed	<div></div>

2. In the toolbar, select a feed and click .

The Configure Custom Feed or Configure Identity Feed panel opens in the Custom Feed wizard.

The screenshot shows a wizard window titled "Configure a Custom Feed" with a close button (X) in the top right corner. The wizard has four tabs: "Define Feed" (active), "Select Services", "Define Columns", and "Review".

In the "Define Feed" tab, the following options are visible:

- Feed Type:** Radio buttons for "CSV" and "STIX" (selected).
- Feed Task Type:** Radio buttons for "Adhoc" (selected) and "Recurring".
- Name \*:** A text input field containing "TEST".
- File \*:** A text input field containing "TEST-stix.xml" and a "Browse" button to its right. Below the field is a blue link labeled "download file".
- Advanced Options:** A section header with a downward arrow icon.

At the bottom of the wizard, there are four buttons: "Reset", "Cancel", "Prev", and "Next".

3. If you want to edit the feed file:
  - a. Click **download file**.  
For an Identity feed, the .zip file is downloaded. For a custom feed, the .csv or .xml file is downloaded to your local file system.
  - b. Edit and save the file.
  - c. In the **Define Feed** tab, browse for and open the edited file.
4. Edit any other parameters in the **Define Feed** tab, **Select Services** tab, and **Define Columns** tab that apply to the type of feed.
5. Anytime before you click **Finish**, you can:
  - Click **Cancel** to close the wizard without saving your changes.
  - Click **Reset** to clear the data in the wizard.
  - Click **Next** to display the next form (if not viewing the last form).
  - Click **Prev** to display the previous dialog (if not viewing the first form).
6. In the **Review** tab, review the feed information, and if correct, click **Finish**.

The feed is added to the feeds list and progress bar tracks completion. Upon successful creation of the feed definition file, the Create Feed wizard closes, and the feed and corresponding token file is listed in the Feeds list. You can expand or collapse the entry to see how many services are included, and which services are successful.

## Removing a Feed

This topic provides instructions for removing a feed.

### To remove a feed:

1. Go to **CONFIGURE > CUSTOM FEEDS**.

The Custom Feeds dialog is displayed.

	Name	Trigger	Disk Usage	Created	Last Run Time	Status	Progress
<input type="checkbox"/>	TEST	Once	-	2017-07-13 13:30:36	2017-07-13 13:30:36	Completed	<div></div>
<input type="checkbox"/>	TEST2	Once	-	2017-07-13 13:50:33	2017-07-13 13:50:33	Completed	<div></div>
<input type="checkbox"/>	te	Once	-	2017-07-14 04:16:51	2017-07-14 04:16:51	Completed	<div></div>
<input type="checkbox"/>	onlydom	Once	-	2017-07-14 04:21:37	2017-07-14 04:21:37	Completed	<div></div>
<input type="checkbox"/>	PCAP	Once	-	2017-07-14 09:30:49	2017-07-14 09:30:49	Completed	<div></div>
<input type="checkbox"/>	myCSV	Once	-	2017-07-18 22:20:12	2017-07-18 22:24:06	Completed	<div></div>

2. In the toolbar, select a feed and click

The Delete Custom Feeds dialog is displayed.

**Delete Custom Feeds**


☐ Local DB and Service  
☒ Local DB Only  
☐ Service Only

Cancel
Delete

You can select one of the following options to delete the feed:

- If you choose to delete the feed from **Local DB and Service**, the feed is deleted from both the service and the local NetWitness Platform box. The deleted feed will no longer be seen on the NetWitness Platform user interface.

- If you choose to delete the feed from **Local DB Only**, the feed is deleted from the local NetWitness Platform box. The deleted feed will not be seen on the NetWitness Platform user interface; however, the last deployed version of the feeds will be present on the service. The undeployed feeds will be deleted forever.
  - If you choose to delete the feed from **Service Only**, the feed is deleted from the service. The deleted feed will appear on the NetWitness Platform user interface and can be deployed again.
3. Select which feed you want to delete and click **Delete**.  
A warning dialog is displayed.
  4. Click **yes** to confirm that you want to delete the feed from the selected areas.
    - If you chose to delete the feed from the **Local DB Only**, the feed is deleted.
    - If you chose to delete the feed from the **Local DB and Service** or **Service Only**, the Delete Custom Feeds dialog is displayed showing the progress of the deletion on the service.

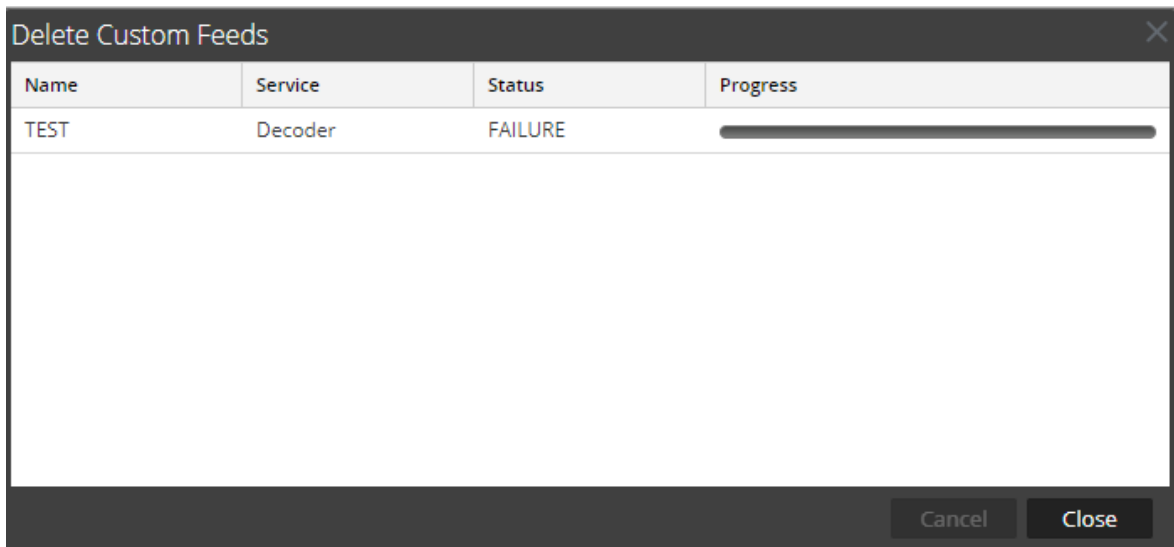

## Miscellaneous Live Services Procedures


This section covers the following procedures:

- [Adding Subscribed Resources for Deployment to Services](#)
- [Deleting a Subscription](#)
- [Displaying Resource Details in Live Resource View](#)
- [Downloading a Resource](#)
- [Locating and Removing a Deployed Resource from Services](#)
- [Removing Subscribed Resources from the Deployments Subscriptions Grid](#)
- [Showing Results as a List or in Detail](#)
- [Subscribe and Unsubscribe to a Resource](#)



- [Viewing Resource Details](#)
- [Viewing Subscribed Resources Selected to Deploy on Services](#)


## Adding Subscribed Resources for Deployment to Services

1. Go to **CONFIGURE > SUBSCRIPTIONS > Deployments Tab**.
2. In the **Groups** panel, select a group.  
Subscribed resources, if any, are listed in the Deployments tab Subscriptions panel.
3. In the **Subscriptions** panel, click .  
The Add Subscription dialog, which lists subscriptions available for deployment, is displayed.
4. Select the subscribed resources that you want to deploy to the services group.
5. Click **Save**.  
The dialog closes and the subscriptions are added to the listing in the Deployments tab, Subscriptions panel. This stages the resources for deployment at the next synchronization.

## Deleting a Subscription

When you delete a subscription to a resource, deployed instances of the resource are not deleted. The deployed resource remains on services until explicitly removed, but the resource is no longer synchronized with the resource in NetWitness Platform Live.

### To delete a subscription:

1. In the **Subscriptions tab**, select the subscriptions you want to delete.
2. Click .  
A dialog asks for confirmation that you want to delete the subscription.
3. To confirm removal, click **Yes**.  
The subscription is deleted from the subscriptions list, but any deployed instances of the subscribed resource remain on the services.

## Displaying Resource Details in Live Resource View

After you select a resource (in the Live Resource View), you can display its detailed information.

To open a separate tab in the Live Resource view with details of a selected resource, do one of the following:

- If you are viewing the **Detailed Results**, click the resource type icon or the resource name.

**Search Criteria**

Keywords: malware

Category: FEATURED, THREAT, IDENTITY, ASSURANCE, OPERATIONS

Resource Types: [Dropdown]

Medium: [Dropdown]

Required Meta Keys: [Text Field]

Generated Meta Values: [Text Field]

**Matching Resources**

Show Results | Details | Deploy | Subscribe | Package

- Malware Domains**  
type Feed updated 2017-07-19 1:02 AM version 0.869 size 2.11 MB subscribed yes  
List of domains associates with malware sourced from www.malwaredomains.com.  
threat, malware threat.category, threat.desc, threat.source malwaredomains-com
- Malware Domain List**  
type Feed updated 2017-07-17 12:40 AM version 0.1490 size 85.91 KB subscribed no  
List of domains commonly associated with malware sourced from www.malwaredomainlist.com  
threat, malware threat.category, threat.desc, threat.source malwaredomainlist-domain
- Malware IP List**  
type Feed updated 2017-07-17 12:45 AM version 0.1567 size 32.55 KB subscribed yes  
List of ip addresses commonly associated with malware sourced from www.malwaredomainlist.com.  
threat, malware threat.category, threat.desc, threat.source malwaredomainlist-ip
- Malware PDF**  
type FlexParser updated 2012-02-09 4:51 PM version 0.1 size 17.51 KB subscribed no  
Legacy: Intended only for 9.8. For SA deployments version 10 and above, see lua parser fingerprint\_pdf\_lua Detects PDF files that contain javascript or launch actions

57 Matching Resources

RSA NETWITNESS PLATFORM 11.2.0.0

- If you are viewing the list results, double-click a resource or select a resource and click **Details**.

**Search Criteria**

Keywords: malware

Category: FEATURED, THREAT, IDENTITY, ASSURANCE, OPERATIONS

Resource Types: [Dropdown]

Medium: [Dropdown]

Required Meta Keys: [Text Field]

Generated Meta Values: [Text Field]

**Matching Resources**

Show Results | Details | Deploy | Subscribe | Package

Subscribed	Name	Created	Updated	Type	Description
<input checked="" type="checkbox"/>	yes Malware Domains	2012-02-09 4:48 PM	2017-07-21 1:02 AM	Feed	List of domains associates wi
<input type="checkbox"/>	yes Malware IP List	2012-02-09 4:48 PM	2017-07-20 7:21 PM	Feed	List of ip addresses commonly d
<input type="checkbox"/>	no Malware Domain List	2012-02-09 4:48 PM	2017-07-20 7:30 PM	Feed	List of domains commonly asso
<input type="checkbox"/>	yes Malware PDF	2012-02-09 4:51 PM	2012-02-09 4:51 PM	FlexParser	Legacy: Intended only for 9.8. F
<input type="checkbox"/>	no Malware Activity Report	2017-03-14 3:21 PM	2017-03-14 3:21 PM	NetWitness Report	Displays traffic that has been g
<input type="checkbox"/>	no Malware Activity DNS	2017-03-14 3:18 PM	2017-03-14 3:18 PM	NetWitness Rule	Displays DNS packet traffic that
<input type="checkbox"/>	no Malware Activity Unidentified	2017-03-14 3:18 PM	2017-03-14 3:18 PM	NetWitness Rule	Displays packet and log traffic c
<input type="checkbox"/>	no Malware Activity Web	2017-03-14 3:18 PM	2017-03-14 3:18 PM	NetWitness Rule	Displays web-based packet and
<input type="checkbox"/>	no SchoolBell Malware	2016-10-25 6:05 PM	2016-10-25 6:05 PM	Application Rule	The SchoolBell rule detects mal
<input type="checkbox"/>	no Flame Malware Detection	2012-05-31 8:18 PM	2012-06-05 2:35 PM	FlexParser	Legacy: Intended only for 9.8. D
<input type="checkbox"/>	no RSA FirstWatch Command ...	2012-12-23 12:36 AM	2017-07-20 7:20 PM	Feed	This feed contains IPs that are k
<input type="checkbox"/>	no RSA FirstWatch Command ...	2012-12-23 12:36 AM	2017-07-20 7:20 PM	Feed	This feed contains Domains tha
<input type="checkbox"/>	no Dreambot Malware	2017-04-04 7:36 PM	2017-04-04 7:36 PM	Application Rule	The Dreambot is a banking troj
<input type="checkbox"/>	no Mirage Malware	2016-08-09 6:27 PM	2016-08-09 6:27 PM	Application Rule	Detects malicious outbound tra

57 Matching Resources



RSA NETWITNESS PLATFORM 11.2.0.0

## Downloading a Resource

You can download a single resource from the [Live Resource View](#).

### To download a resource:

1. Go to **CONFIGURE > Live Content**.
2. In the **Search Criteria** panel, enter the criteria needed to return the resource you want to download.

3. Select a single resource, then click  **Details**.
4. Click  **Download**.

The resource is saved as a ZIP archive to your local Downloads folder.


## Locating and Removing a Deployed Resource from Services


You can locate and remove a deployed resource from services from the [Live Resource View](#).

### To view a list of services on which a resource is deployed:

1. With a resource displayed in the **Resource View**, click  **Service Locator**.

The Service Locator dialog is displayed.

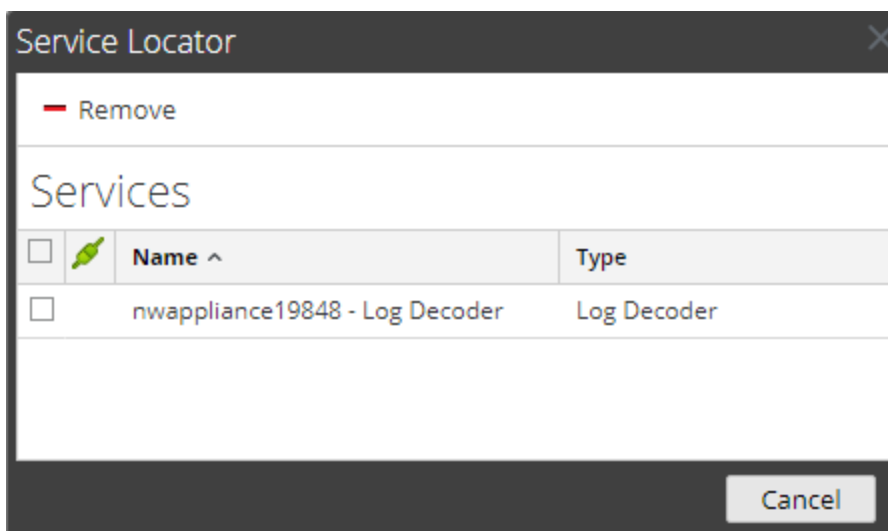


2. Select one or more services in the **Services** list.
3. Click .

The resource is removed from the selected services.

## Removing Subscribed Resources from the Deployments Subscriptions Grid

Subscriptions that are selected for deployment to a service group are deployed during synchronization. You can remove subscriptions from the Live Configure view > Deployments tab > Subscriptions panel, but any that have actually been deployed to services remain deployed until someone removes them.

### To remove resources from the Deployments tab Subscriptions panel:

1. In the **Groups** panel, select a group.  
Subscribed resources, if any, are listed in the Subscriptions panel.
2. In the Subscriptions panel, click .

A dialog requests confirmation that you want to delete the resource from the service group. The resource is removed from the Deployments tab Subscriptions panel, but is not removed from services on which it is deployed.

## Showing Results as a List or in Detail

1. To change to grid results when viewing detailed results, select **Show Results > Grid**.

The screenshot shows the RSA NetWitness Platform interface. The top navigation bar includes tabs for RESPOND, INVESTIGATE, MONITOR, CONFIGURE (selected), and ADMIN. Below this is a sub-navigation bar with LIVE CONTENT, INCIDENT RULES, ESA RULES, SUBSCRIPTIONS (selected), and CUSTOM FEEDS. The left sidebar contains 'Search Criteria' with fields for Keywords (malware), Category (FEATURED, THREAT, IDENTITY, ASSURANCE, OPERATIONS), Resource Types, Medium, Required Meta Keys, and Generated Meta Values. The main panel displays 'Matching Resources' in a grid view. The grid has columns: Subscribed, Name, Created, Updated, Type, and Description. It lists 57 matching resources, including Malware Domains, Malware IP List, Malware Domain List, Malware PDF, Malware Activity Report, Malware Activity DNS, Malware Activity Unidentified, Malware Activity Web, SchoolBell Malware, Flame Malware Detection, RSA FirstWatch Command, Dreambot Malware, and Mirage Malware. The bottom status bar shows 'RSA NETWITNESS PLATFORM' and version '11.2.0.0'.

2. To change to detailed results when viewing grid results, select **Show Results > Detailed**.


The screenshot shows the RSA NetWitness Platform interface with the 'Matching Resources' panel in a detailed view. The left sidebar is identical to the previous screenshot. The main panel displays detailed information for four resources: Malware Domains, Malware Domain List, Malware IP List, and Malware PDF. Each resource entry includes a feed icon, title, type, update time, version, size, subscription status, and a description. The bottom status bar shows 'RSA NETWITNESS PLATFORM' and version '11.2.0.0'.

## Subscribe and Unsubscribe to a Resource

### Subscribe

When you subscribe to resources, you will receive notification when new versions of the resources are available.

#### To subscribe to a resource:

1. Go to **Live > Search** view.
2. In the **Search Criteria** panel, specify search criteria and click **Search**.
3. Select one or more resources and click  **Subscribe**.

A confirmation dialog is displayed: **By subscribing to these resources, you are indicating that you wish to receive notification when new versions are available.**

4. To confirm that you want to subscribe to the resource, click **OK**.

The resource is added to the subscriptions managed in the Subscriptions tab and is available for deployment in the Deployments tab.


### Unsubscribe

When unsubscribing from a resource, you have the option to leave the resource on services on which it is deployed or to remove it from services.

#### To unsubscribe from a resource:

1. With a resource displayed in **SUBSCRIPTIONS**, click  **Unsubscribe**.

A confirmation dialog is displayed.

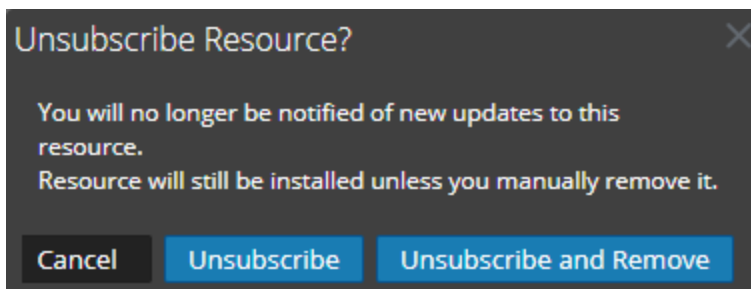


2. Do one of the following:
  - To confirm that you want to unsubscribe from the resource and leave it on the services where it is deployed, click **Unsubscribe**.
  - To confirm that you want to unsubscribe from the resource and remove it from the services where it is deployed, click **Unsubscribe and Remove from Services**.
  - To close the dialog without unsubscribing, click **Cancel**.

The selected action is applied.


## Viewing Resource Details

You can display detailed information about a subscribed resource in the Resource View.

### To view details:

1. In the **Subscriptions tab**, select a single subscription.
2. Click  **Details**.

The details of the resource are displayed in the Resource View.

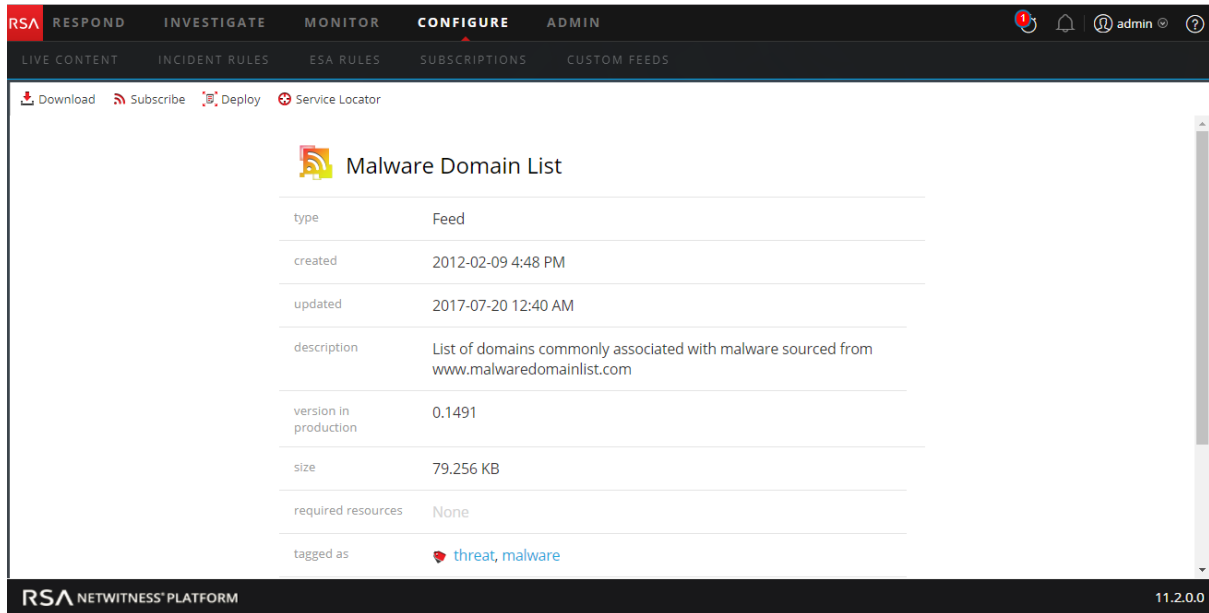

## Viewing Subscribed Resources Selected to Deploy on Services

In the **Live Configure view > Deployments** tab you can view subscribed resources that have been selected for deployment on services.

### To view subscribed resources that have been selected for deployment on services:

In the **Groups** panel, select a group, and expand it to view services in the group.

The resource subscriptions selected for deployment are listed in the Deployments tab Subscriptions panel.

## References

---

This topic is a collection of references, which describe the user interface and more detailed information about how Live works in NetWitness Platform. These topics are presented in alphabetical order.

- [Deployments Tab](#)
- [Discontinued Resources Tab](#)
- [Live Configure View](#)
- [Live Feeds View](#)
- [Live Resource View](#)
- [Live Search View](#)
- [NetWitness Platform Feedback and Data Sharing](#)
- [Resource Package Deployment Wizard](#)
- [RSA Live Registration Portal](#)
- [Subscriptions Tab](#)

## Live Configure View

In the Live Configure view, NetWitness Platform provides integrated tools for managing Live resources. You can manage resource subscriptions, deployments to services and discontinued resources. The required role to access this view is **Configure Live Resources**. For a high-level description of how to use the different views in NetWitness Platform Live, please read [Live Services Management](#).

### To access this view:

1. Go to **CONFIGURE > Subscriptions**. This view has the following tabs:
  - [Deployments Tab](#)
  - [Subscriptions Tab](#)
  - [Discontinued Resources Tab](#)

## Deployments Tab

The Deployments tab provides a user interface in the Live Configure view for:

- Viewing subscribed resources that are selected for deployment on services in a service group.
- Selecting subscribed resources to deploy to services in a service group.
- Removing resources that are selected for deployment on services in a service group.

The resources listed here are not deployed immediately after adding to a service group. Instead the subscribed resources are pushed to the services when NetWitness Platform synchronizes with RSA NetWitness Platform Live. The synchronization schedule is configured in the Live Configuration panel. If you do not want to wait for the scheduled synchronization, you can also tell NetWitness Platform to synchronize now in the Live Configuration panel.

Likewise, resources deleted from the Deployments panel are not deleted from service where they have been deployed. To delete resources from services, delete them in the Live Resource View.


The required permission to access this view is **Manage Live Resources**.

#### To access this view:

1. Go to **CONFIGURE > Subscriptions**.

The **Subscriptions** tab is open by default.

2. Click the **Deployments** tab.

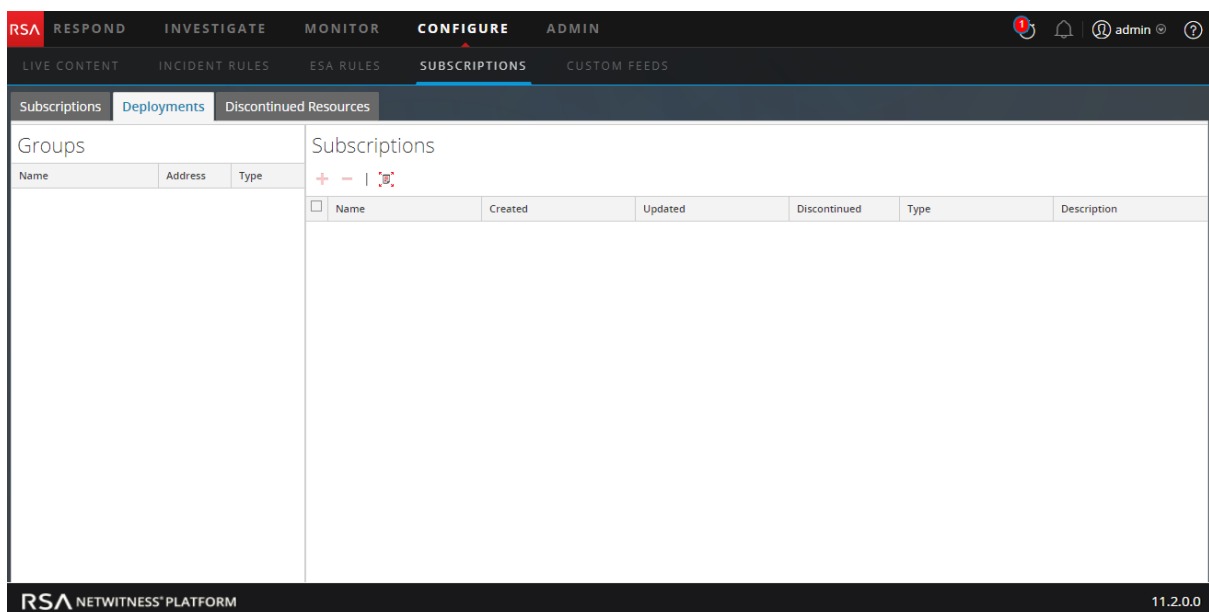

The Deployments tab has two panels: **Groups** and **Subscriptions**.

#### Groups Panel







The Groups panel is a static display of configured service groups that were created in the Administration Services view. Selecting a group in the Groups panel populates the Subscriptions panel with a list of subscriptions that are selected for deployment on the services in the service group.

Feature	Description
<b>Name</b>	Displays the service group name. Clicking the plus sign displays a nested list of services in the group.
<b>Address</b>	Displays the IP address of each service in the group.
<b>Type</b>	Displays the type of service.



## Subscriptions Panel

The following table describes the features in the Subscriptions panel.

Feature	Description
	Click  to open a dialog that lists subscriptions that were added in the Live Search view or in the Live Resource view and are available for deployment.
	Click  to delete the selected subscriptions from the deployment list for service group.
	Click  to synchronize your resources to the latest versions available on Live.
<b>Name</b>	Displays name of the resource.
<b>Created</b>	Displays date and time that the resource was created.
<b>Updated</b>	Displays date and time that the resource was last updated.
<b>Type</b>	Displays type of resource.
<b>Description</b>	Displays description of the resource.

## Subscriptions Tab

Subscriptions are NetWitness Platform Live resources to which you subscribed in the Live Search view or Live Resource view. When you subscribe to a resource, you agree to receive updates on a regular basis from RSA NetWitness Platform Live. The choices made in the Live Configuration panel determine how often synchronization occurs and if you receive email notifications of updates. In addition, if you don't want to wait for the next update, you can force an immediate synchronization.

The Subscriptions tab provides a way to manage subscriptions. Each resource to which NetWitness Platform is subscribed is listed in this tab.

In the Subscriptions tab, you can:


- View all resources to which this NetWitness Platform instance is subscribed.
- Open a detailed view of a subscription in the Live Resource View.
- Delete a subscription.

**Note:** Subscribing to a resource does not deploy the resource to any services. To deploy one or more subscribed resources, go to the Deployments tab. To deploy a single resource manually, use the Deploy option in the Resource View.

The required permission to access this view is **Manage Live Resources**.

To access this view, in the main menu, select **CONFIGURE > Subscriptions**.

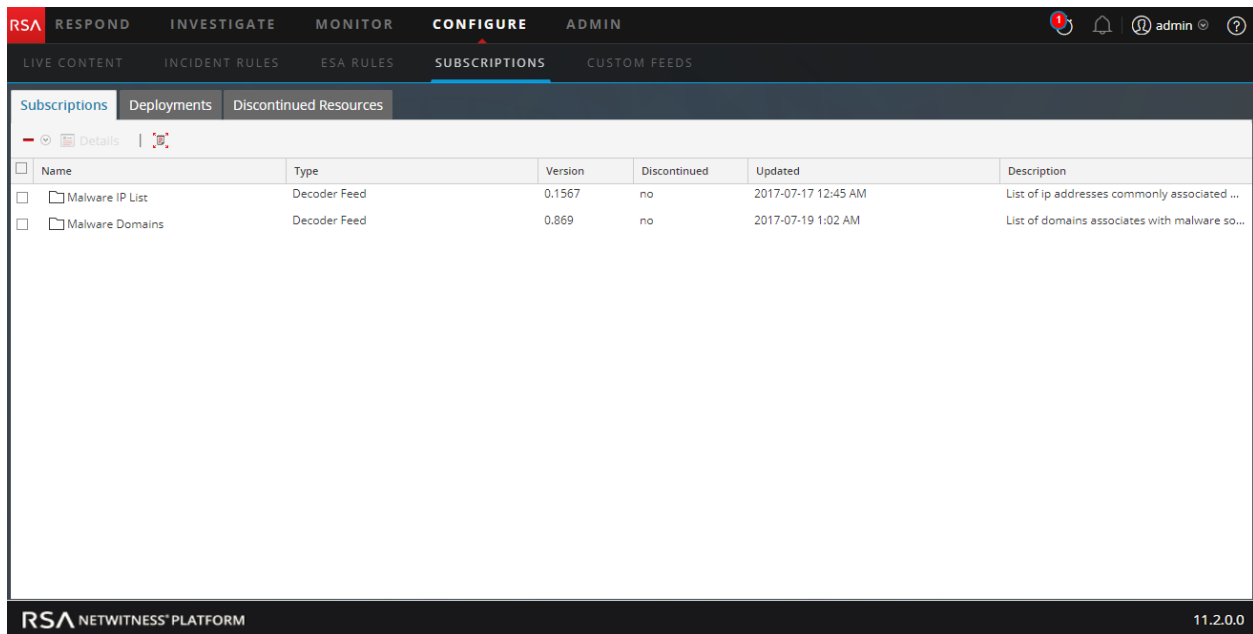


The Subscriptions tab is open by default.




The **Subscriptions** tab has a toolbar and a grid.

### Toolbar

This table describes the options available in the toolbar.

Feature	Description
	Deletes the selected subscriptions.
 Details	Displays the details of a single subscribed resource in the Resource View.
	Check the Live Server for the latest discontinued resources.

### Grid

Column	Description
	Selects subscribed resources to view in detail or delete. You can view details for a single resource. You can delete one or more resources from the subscribed resources, in effect unsubscribing.
<b>Name</b>	Displays name of the subscribed resource.
<b>Type</b>	Displays type of subscribed resource.
<b>Version</b>	Displays version of the subscribed resource.

Column	Description
<b>Discontinued</b>	Indicates the status of the discontinued resources for the subscribed resource. <b>Yes</b> - Resource is discontinued. <b>No</b> - Resource is not discontinued. <b>--</b> - The Live Server is not checked for the discontinued resources.
<b>Updated</b>	Displays date and time when the subscribed resource was last updated.
<b>Description</b>	Displays description of the subscribed resource.

## Discontinued Resources Tab

This topic introduces the features of the **Live Configure view > Discontinued Resources** tab.

The Discontinued Resources tab provides a user interface in the Live Configure view for:

- Scanning the services for the discontinued resources.
- Removing the discontinued resources from any service or service group.

**Note:** Discontinued content still appears. With discontinued content there just won't be any updates, and users won't see these items when they search in Live, unless they check the **Include Discontinued Resources** box while searching.


In the RSA Content space on RSA Link, you can view the complete, up-to-date list of discontinued resources ([Discontinued Content](#)). For each resource, there is a description of why it was discontinued. Use these details to determine whether or not to remove a discontinued resource from your installation. .

The required permission to access this view is **Manage Live Resources**.

### To access this view:

1. Go to **CONFIGURE > Subscriptions**.  
The **Subscriptions** tab is open by default.
2. Click the **Discontinued Resources** tab.

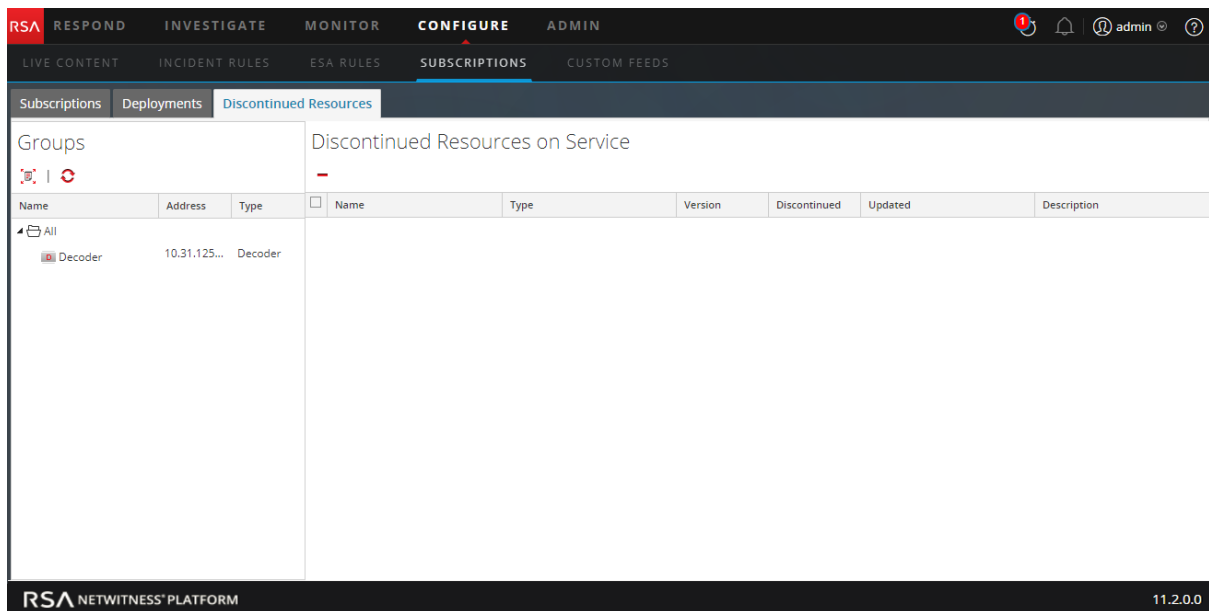


This is an example of the Discontinued Resources tab.



The Discontinued tab has two panels: Groups and Discontinued Resources on Service.

### Groups Panel

The Groups panel is a static display of configured service groups that were created in the Admin Services view. Selecting a group in the Groups panel populates the Discontinued Resources panel with a list of discontinued resources which are deployment on the selected service or service group.

Feature	Description
	Click  to scan the services for a discontinued resource.
	Displays the current status of the discontinued resources on a service. <b>Note:</b> The status of a service may change while the services are being scanned.
<b>Name</b>	Displays service group name. Clicking the plus sign displays a nested list of services in the group.
<b>Address</b>	Displays IP address of each service in the group.
<b>Type</b>	Displays type of service.

### Discontinued Resources on Service Panel

The following table describes the features in the Discontinued Resources on Service panel.

Feature	Description
	Click  to delete the selected resources from the service or service group.

Feature	Description
<b>Name</b>	This is the name of the resource.
<b>Type</b>	This is the type of resource.
<b>Version</b>	Version of the discontinued resource.
<b>Discontinued</b>	Indicates the status of the discontinued resources for the subscribed resource. <b>Yes</b> - The resource is discontinued. <b>No</b> - The resource is not discontinued. <b>--</b> - The Live Server is not checked for the discontinued resources.
<b>Updated</b>	Displays date and time that the resource was last updated.
<b>Description</b>	Displays description of the resource.

## Live Feeds View

Use the Live Feeds View to:


- Create custom feeds.
- Create identity feeds.
- Edit feeds.

The required role to access this view is **Manage Devices**.

To access this view, do one of the following:

- In the main menu, select **Live > Feeds**.
- From any view in the Live Module, select **Feeds** in the main menu.


This is an example of the Feeds view.

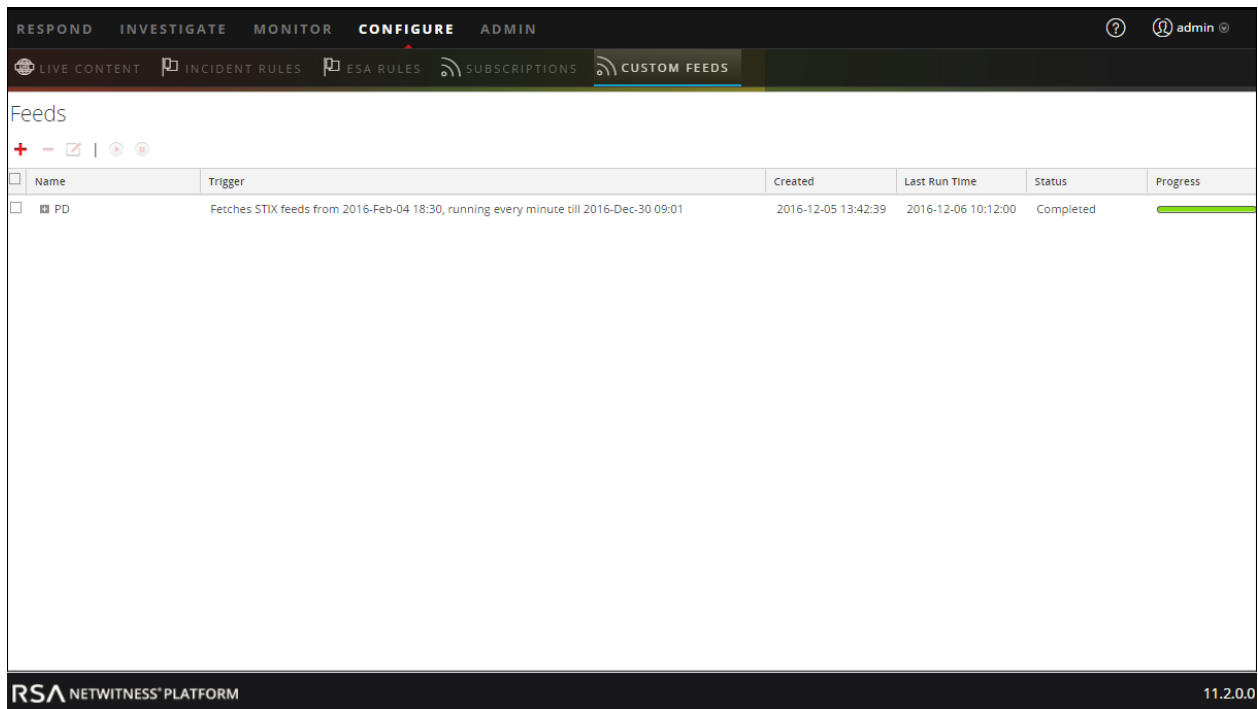

The **Feeds** tab has a toolbar and a grid.

## Toolbar


This table describes the options in the toolbar.

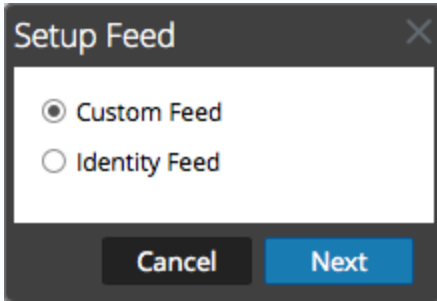Feature	Description
	<p>Initiates the creation of a custom or identify feed by displaying the <b>Setup Feed</b> dialog is displayed.</p>  <ul style="list-style-type: none"> <li>• Custom Feed opens the <b>Configure a Custom Feed</b> wizard.</li> <li>• Identity Feed opens the <b>Configure Identity Feeds</b> wizard.</li> </ul>
	Deletes the feed that you selected.
	Opens the Configure Custom Feed or Configure Identity Feed wizard for the feed that you selected (see <a href="#">Editing a Feed</a> ).
	Start or resume data feed.

Feature	Description
	Stop or pause data feed.

## Feeds Grid

This table describes the columns in the grid.

Column	Description
	Selects a feed.
Name	Name of the feed. <b>Note:</b> You can now use special characters to define the name of the custom feed.
Trigger	Displays how often the feed runs which is determined by what you defined in <b>Feed Task Type</b> when the feed was created.
Created	Displays date and time when the feed was created.
Disk Usage	Displays the MongoDB storage size used by the TAXII feed.
Last Run Time	Displays date and time when the feed was last run.
Status	The status of the feed.
Progress	Progress bar.

## Live Resource View

The Live Resource View shows a detailed view of a selected resource, and has options to:

- Download the resource.
- Subscribe or unsubscribe the resource.
- Deploy the resource to services.
- Locate services on which the resource is deployed and remove the resource from services.

The required permission to access this view is View Live Resource Details.

To access this view, do one of the following:

1. Go to **CONFIGURE > LIVE CONTENT > Search Criteria**.
2. In the Live Search view, **Detailed Results**, click the resource type icon or the resource name.

3. In the Live Search view, **Grid Results**, double-click a resource or select a resource and click **Details**.

This is an example of the Resource view.

The screenshot displays the RSA NetWitness Platform interface. The top navigation bar includes tabs for RESPOND, INVESTIGATE, MONITOR, CONFIGURE (active), and ADMIN. Below this is a sub-navigation bar with LIVE CONTENT, INCIDENT RULES, ESA RULES, SUBSCRIPTIONS, and CUSTOM FEEDS. A toolbar at the top of the main content area contains icons for Download, Subscribe, Deploy, and Service Locator. The main content area shows the details for a resource titled 'Malware Domain List'. The details are presented in a table-like format with the following information:

type	Feed
created	2012-02-09 4:48 PM
updated	2017-07-20 12:40 AM
description	List of domains commonly associated with malware sourced from <a href="http://www.malwaredomainlist.com">www.malwaredomainlist.com</a>
version in production	0.1491
size	79.256 KB
required resources	None
tagged as	threat, malware

The bottom of the interface shows the RSA NETWITNESS PLATFORM logo and the version number 11.2.0.0.

The Live Resource View has a detailed view of a single resource and a toolbar.





## Resource Details

This is an example of the resource details displayed in the Resource View.

This screenshot is identical to the one above, showing the 'Malware Domain List' resource details in the RSA NetWitness Platform. The interface elements, including the navigation bar, toolbar, and resource details table, are the same.

The following table describes the elements in the Resource Details section.






Feature	Description
<b>Resource Type Icon</b>	A graphic representation of the resource type, for example  .
<b>Name</b>	The name of the resource, for example, <b>fingerprint_office_lua</b> .
<b>Type</b>	The type of resource, for example, <b>RSA Lua Parser</b> .
<b>Created</b>	The date the resource was created, for example, <b>2013-09-15 02:16 PM</b> .
<b>Updated</b>	The date the resource was last updated, for example, <b>2013-09-15 02:16 PM</b> .
<b>Description</b>	The description of the resource, for example, <b>Identifies Microsoft Office 95, 2007 Word, Excel, and PowerPoint documents</b> .
<b>Version in production</b>	The version of the resource, for example, <b>0.1</b> .
<b>Size</b>	The size of the resource, for example, <b>9.079 KB</b> .
<b>Required Resources</b>	A list of resources on which this resource depends, for example, <b>NetWitness Lua Library</b> . Clicking a resource replaces the currently displayed details with the details of the one you clicked.
<b>Tagged as</b>	The tags  that apply to the resource. In the example, the tag is <b>featured, informational</b> . Clicking a tag opens the Live Search View with the search narrowed to match resources with that tag.
<b>Required Meta Keys</b>	The meta keys  that apply to the resource. In the example, there are no meta keys required. Clicking a meta key opens the Live Search View with the search narrowed to match resources with that meta key.
<b>Generates Meta Values</b>	The meta values  that the resource generates. In the example, there are no meta values generated. Clicking a meta value opens the Live Search View with the search narrowed to match resources with that meta value.
<b>Permissions</b>	The permissions required for the resource.

## Resource View Toolbar

This table describes the Live Resource view toolbar options.


Feature	Icon	Description
Download	 <b>Download</b>	This option downloads the resource currently displayed in the Resource View.

Feature	Icon	Description
Subscribe or Unsubscribe		<p>This option subscribes to or unsubscribes from the resource currently displayed in the Resource View.</p> <ul style="list-style-type: none"> <li>Clicking <b>Subscribe</b> opens a dialog notifying that you are agreeing to receive notification when the selected resources are updated. You can cancel or click <b>OK</b>.</li> <li>Clicking <b>Unsubscribe</b> asks for confirmation that you want to stop receiving notification when the selected resources are updated. You can then choose to cancel or you can click <b>Unsubscribe</b> or <b>Unsubscribe and Remove</b>, which also removes the resource from services on which it is deployed.</li> </ul>
Deploy		This option provides a way to deploy the resource currently displayed in the Resource View. Clicking <b>Deploy</b> opens the Manual Resource Deployment dialog.
Service Locator		This option displays a list of services on which the currently displayed resource is deployed. You can remove the resource from all services or selected services.

## Live Search View

The Live Search view provides the ability to browse the configured Live CMS for resources. Once matching resources are found, you can view details, subscribe to resources, and deploy resources to services and service groups.


This is an example of the Search view.

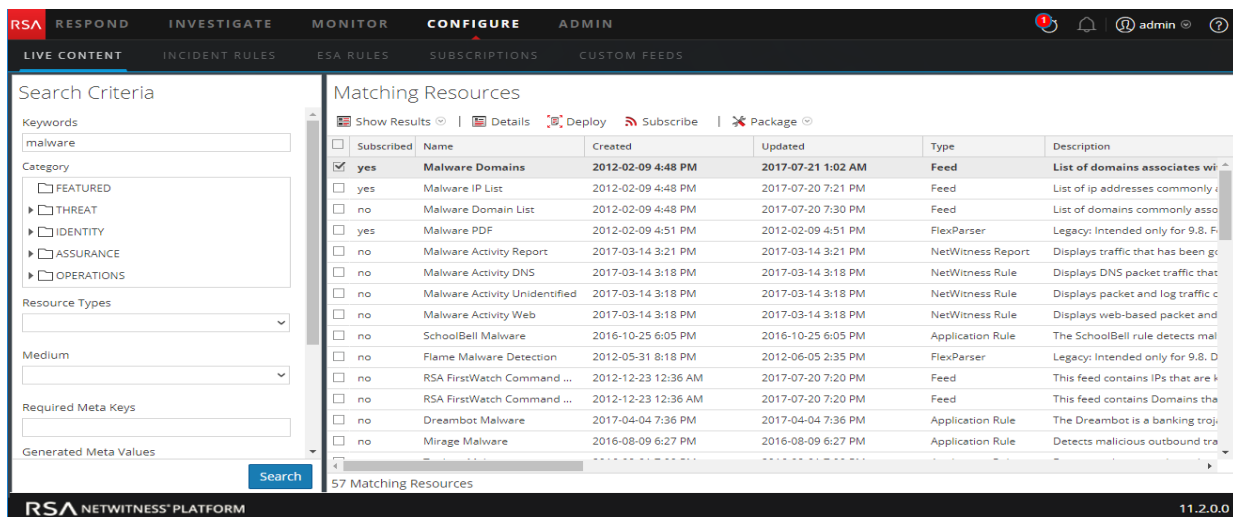

The Live Search view has a panel for specifying search criteria and a panel that displays matching resources. The Search Criteria panel is collapsible to provide more width for viewing the Matching Resources panel.

## Search Criteria Panel

This is an example of the Search Criteria panel.

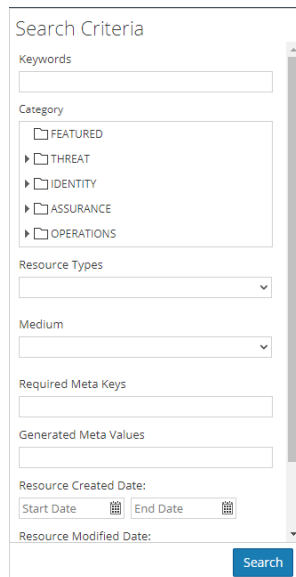



The screenshot shows a 'Search Criteria' panel with the following fields and controls:

- Keywords:** A text input field.
- Category:** A list of checkboxes with labels: ☐ FEATURED, ☐ THREAT, ☐ IDENTITY, ☐ ASSURANCE, and ☐ OPERATIONS.
- Resource Types:** A dropdown menu.
- Medium:** A dropdown menu.
- Required Meta Keys:** A text input field.
- Generated Meta Values:** A text input field.
- Resource Created Date:** Two date pickers labeled 'Start Date' and 'End Date'.
- Resource Modified Date:** A text input field.
- Search:** A blue button at the bottom right.

The following table provides descriptions of the Search Criteria panel features.

Feature	Description
Keyword(s)	Enter a keyword or keywords to browse for resources that have the keyword in the resource name or the resource description. You can use wildcards when you enter a keyword.
Category	The categories mirror the hierarchical Investigation Model that RSA uses to organize resources. The purpose of the Investigation model is to deliver an accurate path to information security incident response. For more information, see the <a href="#">Investigation Model</a> topic.

Feature	Description
Resource Types	<p>Select resources types from the drop-down list to filter resources by type of resource. Possible values are:</p> <ul style="list-style-type: none"> <li>• Advanced Analytics (Warehouse)</li> <li>• Application Rule</li> <li>• Bundle</li> <li>• Correlation Rule</li> <li>• Event Stream Analysis Rule</li> <li>• Feed</li> <li>• FlexParser</li> <li>• Log Collector</li> <li>• Log Device</li> <li>• Lua Parser</li> <li>• Malware Rules</li> <li>• NetWitness List</li> <li>• NetWitness Report</li> <li>• NetWitness Rule</li> </ul> <div> <p><b>Note:</b> Some rules that have been deployed to an earlier version of RSA NetWitness® Platform may not deploy or execute on NetWitness 11.x. For more information, see the <a href="#">Troubleshooting</a>.</p> </div>
Medium	<p>Select one or more mediums from the drop-down list to search for content based on the meta data source.</p> <p>Available values for medium are as follows:</p> <ul style="list-style-type: none"> <li>• <b>log:</b> applied to content that uses meta derived from log data</li> <li>• <b>packet:</b> applied to content that uses meta derived from network packets</li> <li>• <b>log and packet:</b> applied to content that correlates meta derived across log and packet data</li> </ul>
Tags	<p>Select meta tags from the drop-down list to browse based on how the meta is tagged. For example, to browse resources for a Log Decoder, select the <b>netwitness for logs</b> tag. Alternatively, you can click a tag in the Matching Resources panel to insert that tag in this field.</p>
Required Meta Key(s)	<p>Enter a specific meta key; for example, <b>threat.source</b>. Alternatively, you can click a meta key in the Matching Resources panel to insert that tag in this field.</p>
Generated Meta Value(s)	<p>Enter a generated meta value; for example, <b>netwitness</b>. Alternatively, you can click a generated meta key in the Matching Resources panel to insert that tag in this field.</p>

Feature	Description
Research Created Date	Specify a date range during which resources were created. For example, to browse resources that were created between January 1 and January 4, you select January 1 as the start date and January 4 as the end date. You must enter dates in mm/dd/yyyy format or you click  and pick dates from a calendar.
Research Modified Date	Specify a date range during which resources were modified. For example, to browse resources that were modified between January 1 and January 4, you select January 1 as the start date and January 4 as the end date. You must enter dates in mm/dd/yyyy format or you click  and pick dates from a calendar.
Search	Click <b>Search</b> to send the search request to the Live server. More specific search criteria return matching resources more quickly.
Cancel	Click <b>Cancel</b> to cancel the search in progress.
Include Discontinued Resources	Check <b>Include Discontinued Resources</b> to include the discontinued resources in the search result. For an up-to-date list of resources that have been discontinued, see the <a href="#">Discontinued Content</a> topic.


## Matching Resources Panel




The Matching Resources panel presents search results based on the selections made in the Search Criteria panel. Results are initially displayed in a grid, but you can switch between two Show Results options: Detailed or Grid.

### Detailed Results

In the detailed results, you can click a tag, meta key, or resource meta value to auto fill the Search Criteria panel and pivot the search results.

The following table describes the elements in the detailed results.

Feature	Description
Resource Type Icon	A graphic representation of the resource type. For example  .
Name	The name of the resource, for example, <b>Group Management</b> . <div>Note: <b>(Discontinued)</b> is displayed next to the resource name if a resource is discontinued.</div>
Type	The type of the resource, for example, <b>Rule</b> .
Updated	The date the resource was last updated, for example, <b>2015-09-15 4:27 PM</b> .
Version	The version of the resource, for example, <b>0.1</b> .
Size	The size of the resource, for example, <b>153 B</b> .






Feature	Description
<b>Subscribed</b>	Subscription status: <ul style="list-style-type: none"> <li><b>yes:</b> This NetWitness Platform instance is subscribed to this content resource.</li> <li><b>no:</b> This NetWitness Platform instance has not subscribed to this content resource.</li> </ul>
<b>Description</b>	The description of the resource, for example, <b>Compliance Rule-Group Management</b> .
<b>Tags</b>	The tags that apply to the resource. Clicking a tag narrows the search to resources with that tag. For example,  .
<b>Meta Keys</b>	The meta keys that apply to the resource. Clicking a meta key narrows the search to resources with that meta key. For example,  .
<b>Resource Meta Values</b>	The meta values generated by the resource. Clicking a meta value narrows the search to resources that generated the meta value. For example,  .

### Grid Results

In the grid view, you can select one or more resources and use additional options in the toolbar to view the details of a single resource, subscribe to resources, and deploy resources.

The following table describes the elements in the grid results.

Feature	Description
<b>Subscribed</b>	Subscription status: <ul style="list-style-type: none"> <li><b>yes:</b> This NetWitness Platform instance is subscribed to this content resource.</li> <li><b>no:</b> This NetWitness Platform instance has not subscribed to this content resource.</li> </ul>
<b>Name</b>	The name of the resource, for example, <b>Group Management</b> . <div> <b>Note:</b> The resource name is displayed in red color if it is discontinued. </div>
<b>Created</b>	The date the resource was created, for example, <b>2015-08-12 3:11 PM</b> .
<b>Updated</b>	The date the resource was last updated, for example, <b>2015-09-15 4:27 PM</b> .
<b>Type</b>	The type of the resource, for example, <b>Rule</b> .
<b>Discontinued</b>	The status of the discontinued resources: <ul style="list-style-type: none"> <li><b>yes</b> - The resource that matches the search criteria is discontinued.</li> <li><b>no</b> - The resource is not discontinued.</li> <li><b>--</b> - The Live Server is not checked for the discontinued resources.</li> </ul>
<b>Description</b>	The description of the resource, for example, <b>Compliance Rule-Group Management</b> .
<b>Toolbar</b>	

Feature	Description
 <b>Show Resu</b>	This menu offers two ways to view search results: <b>Detailed</b> and <b>Grid</b> .
 <b>Details</b>	This option applies to a single selected resource. Clicking <b>Details</b> opens the selected resource in the Live Resource view.
 <b>Deploy</b>	This option applies to one or more selected resources.
 <b>Subscribe</b>	This option applies to one or more selected resources. Clicking <b>Subscribe</b> opens a dialog that asks for confirmation that you want to receive notification when the selected resources are updated.
 <b>Package</b> ▼	<p>This menu offers two packaging functions for the selected resources:</p> <ul style="list-style-type: none"> <li>• <b>Create</b>: creates a <b>resourceBundle.zip</b> file that contains the selected resources and opens a dialog in which you can either: <ul style="list-style-type: none"> <li>• open the file, or</li> <li>• save the file for subsequent deployment.</li> </ul> </li> <li>• <b>Deploy</b>: opens the Deployment Wizard, in which you can choose a <b>resourceBundle.zip</b> file and deploy it.</li> </ul>

### See Also

- For more information on Deployment ( **Deploy**), see [Find and Deploy Live Resources](#).
- For more information on Deploying a Package ( **Package** ▼), see the [Resource Package Deployment Wizard](#).

## Resource Package Deployment Wizard

If you have created a package of resources and saved it on a network drive, you can use the Resource Package Deployment Wizard to deploy the resources manually to a service or a service group without subscribing to the resources. NetWitness Platform accepts packages in **.nwp** files or **.zip** files.


Deploying resources manually deploys them directly to the services without taking advantage of the powerful resource management capabilities of NetWitness Platform.


If you want to receive notification and updates for updated resources and be able to easily remove resources from a service, you must subscribe to resources in the Live Search view and deploy the resources in the **Live Configure** view.

**Note:** Use NetWitness Platform Live to create resource bundles; this is a different application that is not part of NetWitness Platform. Selecting **Package > Create** in the **Live Search - Matching Resources** toolbar displays the Content Package Tool window. You can choose resources to include in a package and save the package as a NetWitness Platform Package File.

The required permission to access this view is **Deploy Live Resources**.

To access this view:

1. Go to **CONFIGURE > Live Content**.
2. In the **Live Search - Matching Resources** toolbar, select  **Package** > **Deploy**.  
The Resource Package Deployment wizard is displayed.

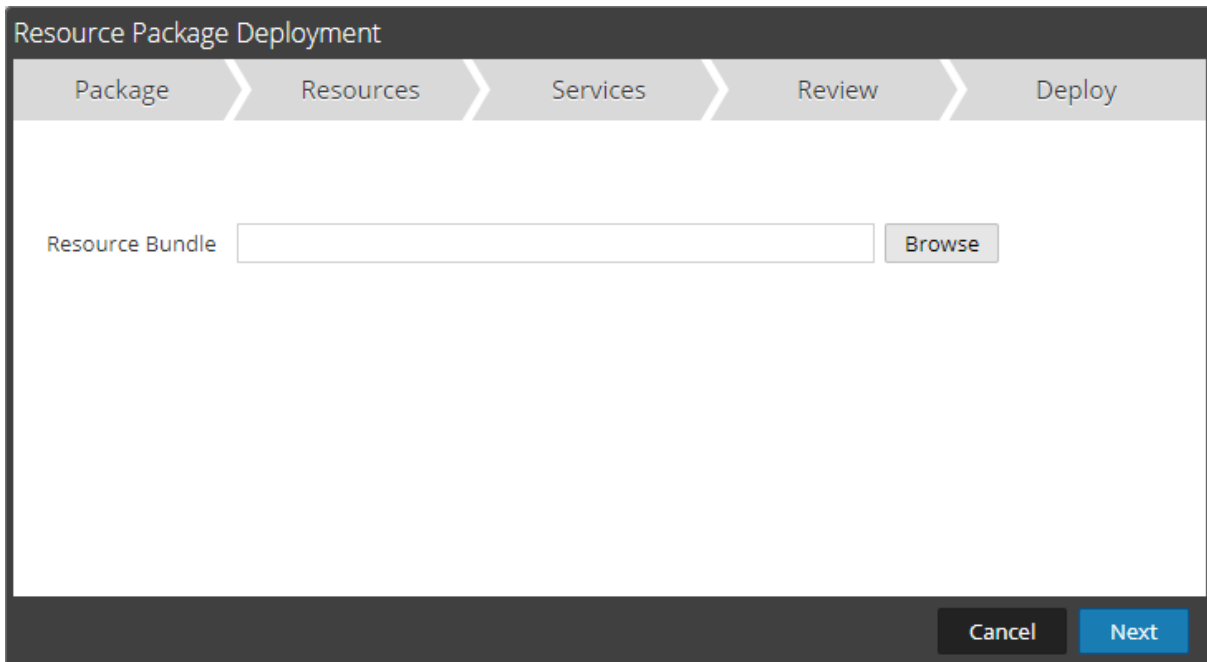

The screenshot shows the 'Resource Package Deployment' wizard. It has a dark header with the title 'Resource Package Deployment'. Below the header is a horizontal navigation bar with five tabs: 'Package', 'Resources', 'Services', 'Review', and 'Deploy'. The 'Package' tab is currently selected and highlighted. The main content area is white and contains a label 'Resource Bundle' followed by a text input field and a 'Browse' button. At the bottom right of the wizard, there are two buttons: 'Cancel' and 'Next'.

## Features

The Deployment Wizard has five tabs: **Package**, **Resources**, **Services**, **Review** and **Deploy**. Use **Close** to exit before you complete the wizard.

When you complete the wizard, NetWitness Platform returns to the Live Resources View.

## Package Tab


You use this tab to select a resource bundle from your network in this page.

This is an example of the Package tab, with a resource bundle already selected.



The screenshot shows a wizard titled "Resource Package Deployment" with five tabs: Package, Resources, Services, Review, and Deploy. The "Package" tab is active. It contains a "Resource Bundle" label, a text input field with the value "resourceBundle3866217298122437775.zip", and a "Browse" button. At the bottom right, there are "Cancel" and "Next" buttons.

The following table describes the elements in the Package tab.

Column	Description
Resource Bundle	The input field to specify a resource bundle. You can type a path in this field or search using the  button.
Command Buttons	
Browse	This button opens a File Upload dialog in which you can browse the local file system and select a bundle.
Cancel	Cancels the deployment and closes the wizard.
Next	Displays the next tab of the wizard.

## Resources Tab

This tab displays the resources contained in the bundle.

The following figure shows an example of the Resources tab.

Resource Package Deployment

Package
Resources
Services
Review
Deploy

Total resources : 2

Resource Names	Resource Type	Dependency Of
suspicious php put long query	RSA Application Rule	
APT Domain Intelligence	RSA Application Rule	

Cancel
Next

The following table describes elements in the Resources tab.


Column	Description
Resource Name	Displays the name of the resources in the bundle (for example, <b>NetWitness Lua Library</b> ).
Resource Type	Displays the resource types for the resources in the bundle (for example, <b>RSA Lua Parser</b> ).
Dependency Of	Displays Resources on which the selected resource depends (for example, <b>AIM lua</b> ).

## Services Tab



You select the services to which you want to deploy the resources in the bundle.

The Services tab has two tabs, **Services** and **Groups**. These provide a list of services and service groups that are configured in the **ADMIN > Services** view. The columns are a subset of the columns available in the Services view. You can select the services or the service groups to which you want to deploy the resources in the bundle.

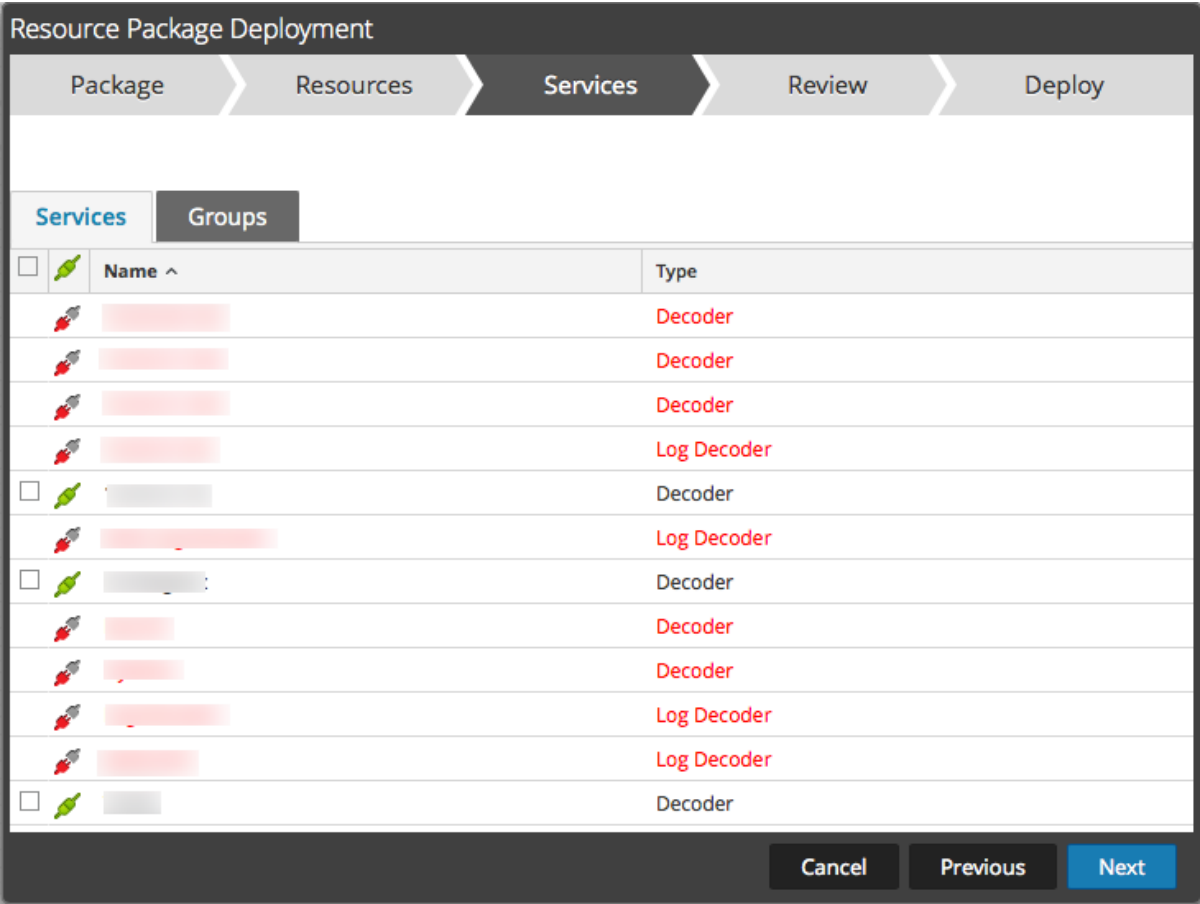This is an example of the Services tab.



The following table describes the elements in the Services tab.

Column	Description
<b>Services</b>	
	Selects services to which you want to deploy the content. You can select any combination of services and service groups.
Name	Displays the services in your environment to which you can deploy the content.
Host	Displays the name of the resource host.
Type	Displays the type of NetWitness Platform service.
<b>Groups</b>	
	Selects service groups (if you have service groups defined in your environment).
Name	Displays the names of the service groups.

Review Tab

Displays the resources and services on which the resources will be deployed.

In this tab, you can do the following:

- Review the content and services before you deploy.
- Initiate the deployment of the resources.

The following figure shows an example of the Review tab.

Resource Package Deployment

Package

Resources

Services

Review

Deploy

Service	Service Type	Resource Name	Resource Type
	Decoder	suspicious php put long query	RSA Application Rule
		APT Domain Intelligence	RSA Application Rule

Cancel

Previous

Deploy

The following table describes the elements in the Review tab.

Column	Description
<b>Service Information</b>	
Service	Displays the services in your environment to which you can deploy the content.
Service Type	Displays the type of each NetWitness Platform service (type of host/service).
<b>Resource Information</b>	
Resource Name	Displays the name of the resources you have selected (for example, <b>NetWitness Lua Library</b> ).
Resource Type	Displays the resource types for the resources you have selected (for example, <b>RSA Lua Parser</b> ).
Deploy	Initiates the deployment of the resources and displays the <b>Deploy</b> page (final page of the wizard).

## Deploy Tab

This tab allows you to do the following:

- View the progress of the job
- Cancel the job

This is an example of the Deploy tab.

The screenshot shows the 'Resource Package Deployment' wizard with the 'Deploy' tab selected. The wizard has five steps: Package, Resources, Services, Review, and Deploy. Below the steps is a table with four columns: Service Name, Resource Name, Status, and Progress. The table shows '0 of 2' items. A progress bar is visible next to the Status column. A 'Cancel' button is located at the bottom right of the wizard.

Service Name	Resource Name	Status	Progress
		0 of 2	

Cancel

The following table describes the elements in the Deploy tab.

Feature	Description
Service Name	Name of the services to which resources are deployed.
Resource Name	Name of the resources.
Status	Status of the manual deployment.
Progress	Progress of the manual deployment in a progress bar. When complete, the bar is solid green.
Command Buttons	
Close	Closes the wizard.
Errors	Only displays if NetWitness Platform encountered any errors. Click to display the errors.
Retry	Only displays if NetWitness Platform encountered any errors. Click this button to try to deploy the resources again using the wizard.

## RSA Live Registration Portal

The RSA Live Registration Portal is a self-service wizard in which customers can set up a Live account and change or reset the password. A Live account is required to get access to the feeds, parsers, rules, and other content in RSA Live library. To access the portal, go to the following URL: <https://cms.netwitness.com/registration/>.

**RSA Security Analytics**

Welcome to the RSA Live Registration Portal

Thank you for using RSA Security Analytics.

Please sign up here for your RSA Live account to access your subscription content.

Terms and Conditions

\*\*\* IMPORTANT INFORMATION – PLEASE READ CAREFULLY \*\*\*

This Software contains computer programs and other proprietary material and information, the use of which is subject to and expressly conditioned upon acceptance of this License Agreement (the "Agreement").

This Agreement is a legally binding document between you (meaning the individual person or the entity that the individual represents that has obtained the Software and Hardware for its internal productive use and not for outright resale) (the "Customer") and RSA (which means (i) RSA Security LLC, if Customer is located in the United States, Mexico or South America; (ii) the local EMC Corporation sales subsidiary, if Customer is located outside the United States, Mexico or South America and in a country in which EMC Corporation has a local sales subsidiary; and (iii) EMC Information Systems International ("EISI"), if Customer is located outside United States, Mexico or South America and in a country in which EMC Corporation does not have a local sales subsidiary. Unless RSA agrees otherwise).

I Agree: ☒

Back Next >

**RSA Security Analytics**

Company and Contact Information

Please fill out the following form. [Change / Reset Password](#)

Contact Information

First Name: John

Last Name: Smith

Company: Xyz Software

Title: System Engineer

Username: John.Smith.Live

Password: \*\*\*\*\*

Confirm Password: \*\*\*\*\*

Email Address: john.smith01@xyz.com

Confirm Email Address: john.smith01@xyz.com

License Server Id

If you are an ECAT customer, or do not have a Security Analytics License Server Id, please contact Customer Support to register.

Contact Information

Back Next >

After you agree to the Terms and Conditions, click **Next**: the fields for setting up an account are displayed. These include Contact Information, Subscription Level, and License Server Id.

The following table lists the contact information section fields and its descriptions:

Parameter	Description
<b>Change / Reset Password</b>	Allows users to change or reset their RSA Live password.
<b>First Name</b>	Your first name.
<b>Last Name</b>	Your last name.
<b>Company</b>	The name of your company.
<b>Title</b>	Your job title or function in the company.
<b>Username</b>	The username used to log on to RSA Live account. The username must contain a minimum of nine characters and a maximum of 60 characters.
<b>Password</b>	The password for the RSA Live account. The password must contain minimum of nine characters and the maximum length is 60, with at least one uppercase, one lowercase, one number, and one special character.
<b>Confirm Password</b>	Confirmation of your password.
<b>Email Address</b>	The email address where you want to receive notifications related to the Live account.
<b>Confirm Email Address</b>	Confirmation of the email address.

Parameter	Description
<b>Subscription Level / Confirm Subscription Level</b>	<ul style="list-style-type: none"><li>• <b>Basic</b> - This provides access to the Live content that is tagged for groups like Basic, Panorama for Log Decoder, and Spectrum for Malware Analysis.</li><li>• <b>Enhanced</b> - This provides access to the Live content that is tagged for groups like Enhanced, Basic, Panorama for Log Decoder, and Spectrum for Malware Analysis.</li><li>• <b>Premium</b> - This provides access to the Live content that is tagged for groups like Premium, Verisign Premium, Enhanced, Basic, Panorama for Log Decoder, and Spectrum for Malware Analysis.</li></ul>
<b>License Server Id</b>	<p>This is the License Id on the <b>ADMIN &gt; SYSTEM &gt; Info</b> page.</p> <div><b>Caution:</b> The license server ID on NetWitness Platform must be valid and must be registered on the Flexera Server. If not, contact RSA Customer Support.</div>

## NetWitness Platform Feedback and Data Sharing

This topic introduces the Feedback and Data Sharing features of NetWitness Platform.


The settings for these features are available in **ADMIN > SYSTEM > Live Services** view, in the Additional Live Services section.

### Additional Live Services

Participation in the Additional Live Services is configured in the **ADMIN > SYSTEM > Live Services** view.

### Live Feedback

Live Feedback is intended to help improve RSA NetWitness Platform.

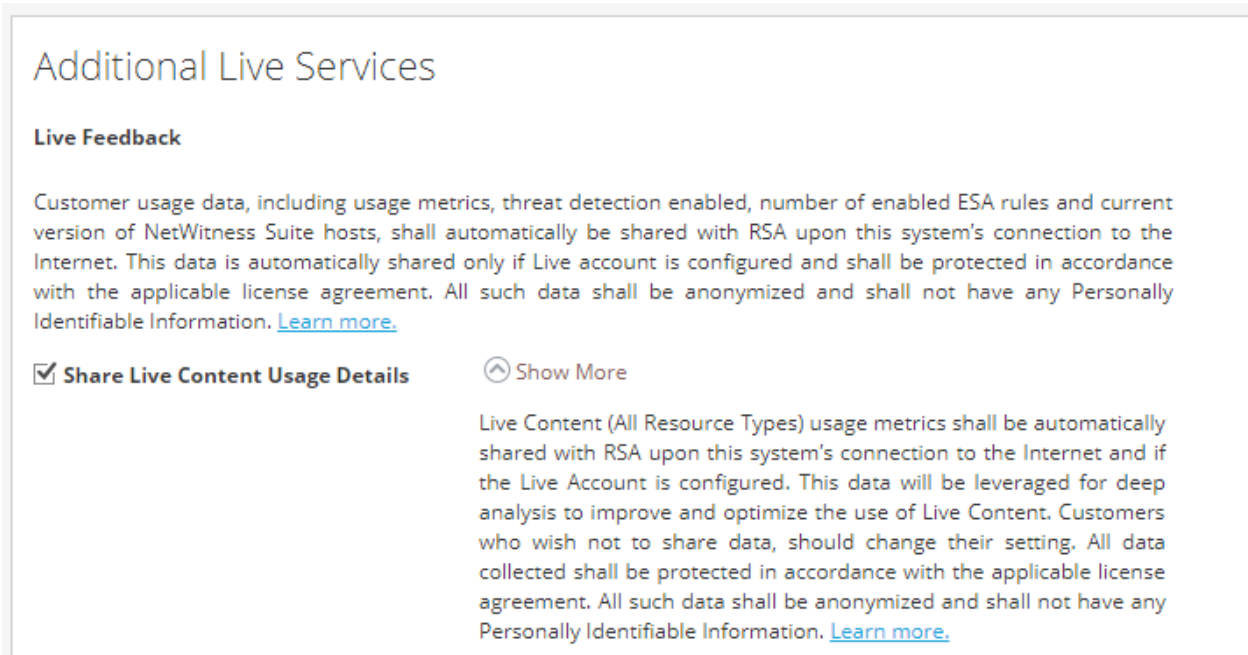

**Additional Live Services**

**Live Feedback**

Customer usage data, including usage metrics, threat detection enabled, number of enabled ESA rules and current version of NetWitness Suite hosts, shall automatically be shared with RSA upon this system's connection to the Internet. This data is automatically shared only if Live account is configured and shall be protected in accordance with the applicable license agreement. All such data shall be anonymized and shall not have any Personally Identifiable Information. [Learn more.](#)

☒ **Share Live Content Usage Details** [Show More](#)

Live Content (All Resource Types) usage metrics shall be automatically shared with RSA upon this system's connection to the Internet and if the Live Account is configured. This data will be leveraged for deep analysis to improve and optimize the use of Live Content. Customers who wish not to share data, should change their setting. All data collected shall be protected in accordance with the applicable license agreement. All such data shall be anonymized and shall not have any Personally Identifiable Information. [Learn more.](#)

Once you set up and configure a Live account, usage data is shared with RSA. This data is automatically shared only if Live account is configured and shall be protected in accordance with the applicable license agreement. All such data shall be anonymized and shall not have any Personally Identifiable Information.

Before data is sent to RSA, all Personally Identifiable Information is removed. Thus, only anonymous usage data gets transferred to RSA.

For more information, see the **Live Feedback Overview** topic in the *System Configuration Guide*.

### RSA Live Connect

RSA Live Connect is a cloud based threat intelligence service. This service collects, analyzes, and assesses threat intelligence data such as IP addresses, domains, and files collected from various sources including the RSA NetWitness Platform and RSA ECAT customer community.



**RSA Live Connect (Beta)**

RSA Live Connect is a cloud based threat intelligence service. This service collects, analyzes, and assesses threat intelligence data such as IP addresses, domains, and files collected from various sources including the RSA NetWitness Suite and RSA NetWitness Endpoint customer community. The RSA Live Connect cloud service stores this information in a secure environment and provides an anonymous, secure 2-way channel over SSL between the RSA Live Connect cloud and the RSA NetWitness Suite/RSA NetWitness Endpoint customers to share and monitor de-identified and obfuscated threat intelligence. This threat intelligence information can be leveraged by analysts for identifying and investigating potential security threats. [Learn more.](#)

☒ Enable    **Threat Insights**    ● Connected

This Live Connect option provides analysts the opportunity to pull threat intelligence data such as IP related information from the Live Connect service to be leveraged by analysts during investigation. In addition, analysts can voluntarily provide anonymous risk assessment feedback on the specific intelligence to Live Connect.

☒ Enable    **Analyst Behaviors**    ● Connected

This Live Connect option is an automated data collection service. It is responsible for gathering meta data captured locally by NetWitness Suite and securely sending it to RSA Live Connect. This data will be leveraged for deep analysis to drive and improve the RSA Live and Live Connect threat intelligence services in order to proactively identify potential security threats.

*NOTE: The type of data that potentially could be shared from a user's network to the RSA Live Connect cloud service could encompass various types of meta data captured by the NetWitness Suite product such as ip.src, ip.dst, ip.addr, device.ip, alias.ip, alias.host, paddr, sessionid, domain.dst, domain.src.*

Customers who do not wish to receive threat intelligence and/or share de-identified and anonymized information with the Live Connect service should change their settings in the [Live Connect](#) feature and/or contact RSA Customer Support for more information.

RSA Live Connect consists of the following features:

- Threat Insights
- Analyst Behaviors

**Threat Insights**

Threat Insights provides analysts the opportunity to pull threat intelligence data such as IP related information from the Live Connect service to be leveraged by the analysts during investigation.

By default, **Threat Insights** is enabled in **Additional Live Services** section. If Context Hub service is configured, Live Connect is automatically added as a data source for Context Hub. For more information, see the **Configure Live Connect Data Source for Context Hub** topic in the *Context Hub Configuration Guide*.

With Live Connect as a data source for context hub, you can use the Context Lookup option in Investigation > Navigate view or Investigation > Events view to fetch contextual information. For instructions, see View Additional Context for a Data Point.


## Analyst Behaviors

Analyst Behaviors is a feature where analysts participate in sharing data to RSA community. This is an automated data collection service. Its goal is to share potential threat intelligence data to the RSA Live Connect cloud service for analysis. The type of data that could be shared from your network to RSA Live Connect includes various types of meta data captured by NetWitness Platform such as ip.src, ip.dst, ip.addr, device.ip, alias.ip, alias.host, paddr, sessionid, domain.dst, domain.src.

**Note:** All data collected locally is de-identified and obfuscated and then sent securely and anonymously to the RSA Live Connect cloud service, where it is stored in a secure environment.

## Description

Live Connect Threat Data Sharing has been developed as a Community based threat intelligence sharing platform.

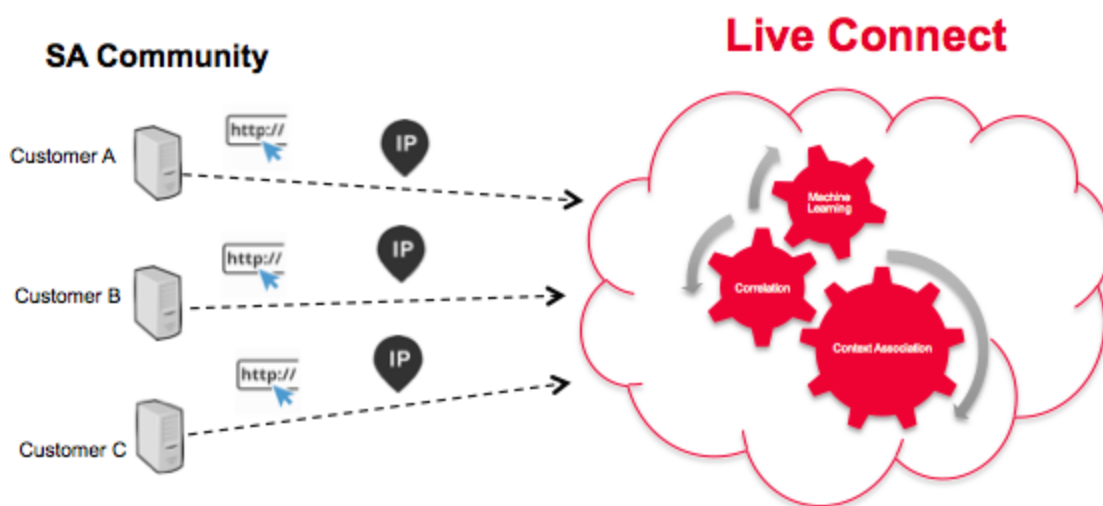

It has the following characteristics and goals:

- Crowd-sourced: the RSA community contributes to the entire collection of intelligence
- Centrally collect and analyze data from the RSA community
- Reduce the intelligence cycle time from days to minutes

Some details to consider:

- We are leveraging analyst investigation activity
- We are harvesting meta data such as IP addresses and domain names
- We are doing deep data analysis: Trending, correlation, anomaly detection
- Remember, this feature is currently in Beta

## Participation

Customer participation is optional. Upon initial install or upgrade to NetWitness Platform 11.0, you are presented with a confirmation screen. By default, you are entered into the program, but you can opt out at any time.

### Cloud Authentication

Authentication for the program is done in the NetWitness Platform UI, where you configure the Live account in the Live services section.

### Configuration

To view or change the settings for Live Connect Threat Data Sharing, in the main menu, select **ADMIN > SYSTEM > Live Services**. Check or clear the **Enable** box to participate or stop participating in the program.

### Data Collection

Data is collected as follows:

- Data Attribution: Anonymous
- Data Source: Subset of meta keys and meta values of a NetWitness Platform analyst's page views from the NetWitness Platform Core Query logs.
- Query Log Harvesting Process:
  - Timing: Batch mode every 24 hours (4 AM – 6 AM UTC)
  - Log Collection: NetWitness Platform server collects NetWitness Platform core device log entries for the previous 24 hours
  - Log Entries: Only SDK-Value and SDK-Query API calls that contain a where clause are collected
  - Log Attribute Parsing: Each entry must have one of the following meta key indicators present: **ip.src**, **ip.dst**, **ip.addr**, **device.ip**, **alias.ip**, **alias.host**, **paddr**, **sessionid**, **domain.dst**, or **domain.src**. If so, meta keys and meta values from the entry will be collected.

**Note:** Once the above criteria is met, NetWitness Platform sends all of the meta keys and values from the query to the cloud—not just the meta key indicators.

The log report is sent in JSON format, over SSL. It contains:

- Timestamps
- Live CMS username (sha256)
- NetWitness Platformlicense server ID (sha256)
- List of SA endpoint IDs (sha256)
- Harvested meta values (MD5 and SHA256 hashed)

### Example

This section lists entries from a log, and then the corresponding section of extrapolated data.

Section from a log file:

User admin (session 204298, 10.4.50.60:57454) has issued values (channel 205237) (thread 2332): fieldName=filter id1=1 id2=23138902 threshold=100000 size=20 flags=sessions,sort-total,order-descending,ignore-cache where="(alias.host = 'mail.google.com') && (ip.src = 161.253.31.130) && time=\"2015-12-07 18:08:00\"-\"2015-12-07 21:07:59\""

Data extrapolation with hashing:

```
{
  timestamp: 1452282588000,
  session: 204298,
  id1: 1,
  id2: 23138902,
  userName: "8c6976e5b5410415bde908bd4dee15dfb167a9c873fc4bb8a81f6f2ab448a918",
  loggerName: "SDK-Values",
  timeRange: "\"2015-12-07 18:08:00\"-\"2015-12-07 21:07:59\"",
  - metalist: [
    - {
      metaKey: "alias.host",
      - properties: {
        domain_hint: "mai*****.com",
        domain_tld: "com",
        md5_value: "be5cab0695415d9363d18ad1345c73eb",
        sha256_value: "3f2728499a4b29460f3e3150df508e06b19edf0f58efd051fac777844d28e452"
      }
    },
    - {
      metaKey: "ip.src",
      - properties: {
        md5_value: "03b81ffdf109a05a3dac88dbec10c59",
        sha256_value: "1d88c6893797c896070bd5470d0026e11b515d5dee97c6173771a43719fa7e78"
      }
    }
  ]
},
```

## Troubleshooting

This section discusses a bit about troubleshooting Live Connect Threat Data Sharing.

### Query Log Retrieval Sample

To retrieve a sample of threat intelligence data sent to Live Connect, you construct a URL by setting the following parameters:

- **sendReport:** value is **true** or **false**: true to send this report to the Live Connect server. False to just create the report for viewing. The value defaults to false.
- **hashValues:** value is **true** or **false**: true to hash the values as md5/sha256. False to show values in clear text – should use only for manual viewing. Defaults to false.
- **startDate / endDate:** Dates for time boundaries for log entries. Format: YYYY-MM-DD HH:mm:ss


The following is an example of the URL to use to retrieve query logs:

```
https://<server>/admin/liveconnect/force_aggregation?startDate=2016-01-18%2000:00:00&endDate=2016-01-19%2010:10:00&sendReport=false&hashValues=true
```

### System Logging: Debug

You can access some debug information as follows.

1. Go to **ADMIN > SYSTEM > System Logging**.
2. Select the **Settings** tab.
3. In the Package Configuration section, select **com > netwitness > platform > server > liveconnect > service (DEBUG)**.

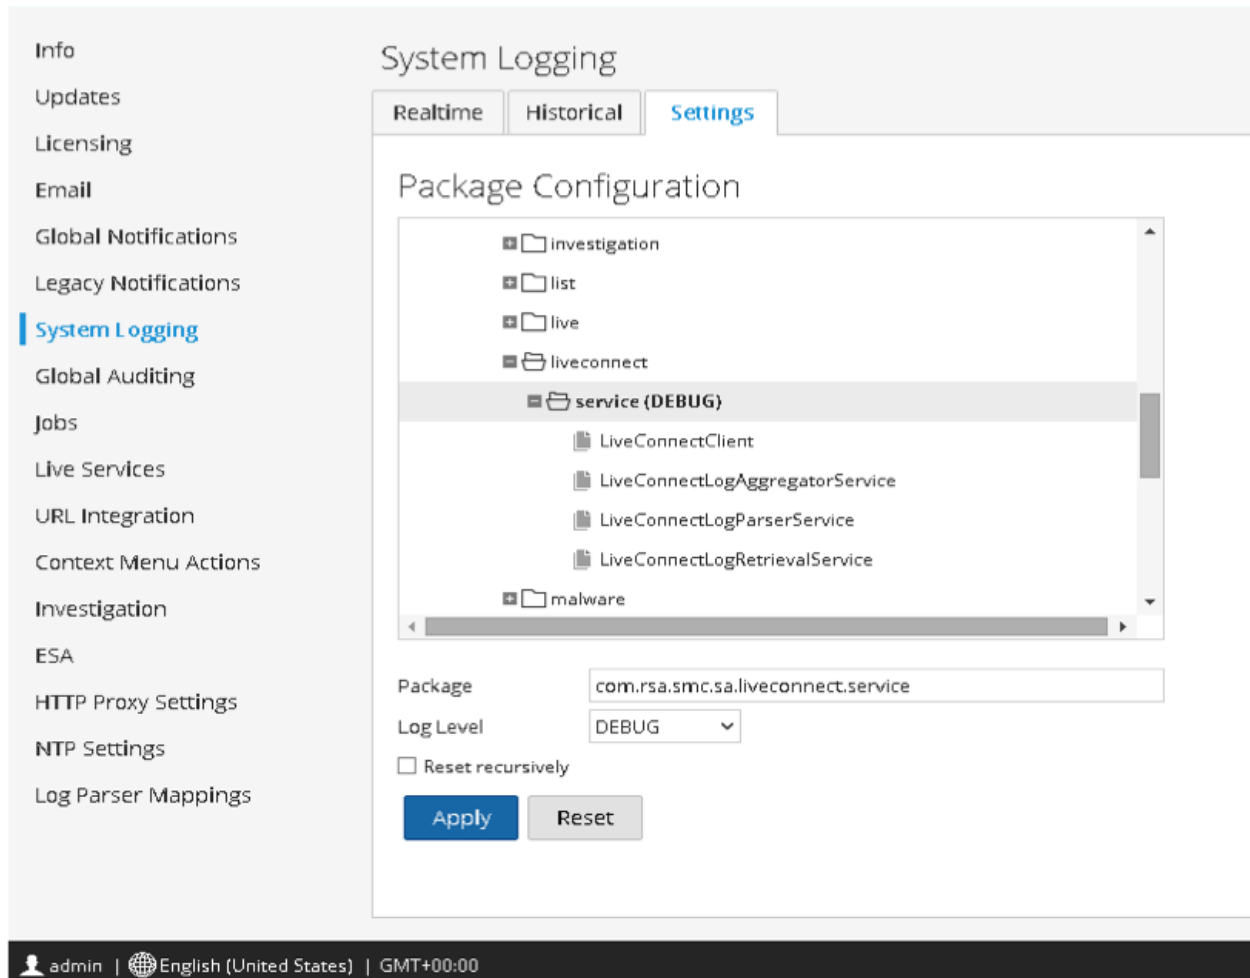

# Troubleshooting

This section provides troubleshooting instructions for issues faced when using the Live Services module in NetWitness Platform.

## Some Rules Are Invalid for Version 11.x

The rules "NetWitness Incident Management - Alert Details" and "NetWitness Incident Management - Incident Summary" are not valid for RSA NetWitness Platform version 11.x. Do not deploy these rules to an 11.x system.

**Note:** Rules are updated frequently, and the documentation for them is available in the Content space on RSA Link. For the latest information on Rules, see [RSA NetWitness Rules](#).

## Troubleshooting OutOfMemoryError on Context Hub Server

This section provide troubleshooting instructions when you encounter OutOfMemoryError on Context Hub server and the service becomes unresponsive.

If there are any TAXII feeds configured, Health and Wellness raises alerts when the available heap memory of Context Hub server is critically low. If the status of Context Hub server is Unhealthy because of low memory, perform the following:

1. Make sure that the feeds **Start Date** is within 180 days.
2. Check if any TAXII feed is consuming too much disk space. A TAXII feed can consume maximum of 300 MB. If it consumes more disk space, you must reduce the value in the **Remove STIX data older than** field under **Advanced Options** in the **Custom Feed Creation Wizard** when you edit a TAXII feeds.

**Note:** If the issue still persists, you must execute step 3.

3. To decrease the number of parallel threads available for processing STIX:
  - a. Go to **ADMIN > Services > Context Hub service > View > Explore**.
  - b. In the tree panel, navigate to **enrichment/stix/ config**.
  - c. In the right panel, set the **stix-query-scheduler-pool-size** field value to 2. By default the value is 5. This setting controls how many number of threads are allowed to process queries for STIX data at the same time.
  - d. Set the **taxii-poll-scheduler-pool-size** field value to 2. By default the value is 5. This setting controls how many number of threads are allowed to poll TAXII servers at the same time.
  - e. Restart the Context Hub server.

## Troubleshooting Content Deployment Using logon.type Meta Key

This section provides instructions for issues deploying content that uses the `logon.type` meta key, such as the Application Rule `Nwfl_account:logon-success-direct-access`.

To solve this issue, perform the following steps:

1. In the NetWitness Platform UI, go to **Configure > Live Content**.
2. In the **Resource types** drop-down list, select **Log Device** and click **Search**
3. Select **Envision Config** file (Version 0.36 and above) from the search results.
4. Click **Deploy** to deploy the content.
5. Complete the Deployment Wizard.