



Automated Threat Detection Guide

for Version 11.0



Contact Information

RSA Link at <https://community.rsa.com> contains a knowledgebase that answers common questions and provides solutions to known problems, product documentation, community discussions, and case management.

Trademarks

For a list of RSA trademarks, go to www.emc.com/legal/emc-corporation-trademarks.htm#rsa.

License Agreement

This software and the associated documentation are proprietary and confidential to EMC, are furnished under license, and may be used and copied only in accordance with the terms of such license and with the inclusion of the copyright notice below. This software and the documentation, and any copies thereof, may not be provided or otherwise made available to any other person.

No title to or ownership of the software or documentation or any intellectual property rights thereto is hereby transferred. Any unauthorized use or reproduction of this software and the documentation may be subject to civil and/or criminal liability.

This software is subject to change without notice and should not be construed as a commitment by EMC.

Third-Party Licenses

This product may include software developed by parties other than RSA. The text of the license agreements applicable to third-party software in this product may be viewed on the product documentation page on RSA Link. By using this product, a user of this product agrees to be fully bound by terms of the license agreements.

Note on Encryption Technologies

This product may contain encryption technology. Many countries prohibit or restrict the use, import, or export of encryption technologies, and current use, import, and export regulations should be followed when using, importing or exporting this product.

Distribution

EMC believes the information in this publication is accurate as of its publication date. The information is subject to change without notice.

October 2017

Contents

NetWitness Suite Automated Threat Detection	4
Automated Threat Detection for Suspicious Domains	4
Suspicious Domains Module Workflow	5
Suspicious Domains Automated Threat Detection on Packets vs. Web Proxy Logs	7
Configuring Automated Threat Detection for Suspicious Domains	8
Prerequisites	8
Configure Automated Threat Detection for Suspicious Domains	9
Step 1: (For Logs Only) Configure Log Settings	10
To Get the Latest Envision Config File:	11
To Verify the Envision Configuration File was Updated Correctly:	12
To Verify the Indices for the index-concentrator.xml File are Updated:	12
Step 2: Create a Domains Whitelist (Optional)	13
Step 3: Configure the Whois Lookup Service	15
Step 4: Map Data Sources to ESA Analytics Modules	15
Step 5: Verify the Suspected Command & Control By Domain Rule is Enabled and Monitor the Rule	15
Step 6: Verify the Incident is grouped by Suspected C&C	16
Next Steps	17
Troubleshooting NetWitness Suite Automated Threat Detection	18
Possible Issues	18

NetWitness Suite Automated Threat Detection

RSA NetWitness® Suite Automated Threat Detection uses preconfigured ESA Analytics modules to identify specific types of threats. An ESA Analytics module is a pipeline composed of activity objects that enrich an event with additional information through mathematical computations. ESA Analytics modules reside within ESA Analytics services. The ESA Analytics services use query-based aggregation (QBA) to collect filtered events for the modules from Concentrators. Only the data required by a module is transferred between the Concentrator and the ESA Analytics system.

There are two ESA services that can run on an ESA host:

- Event Stream Analysis (ESA Correlation rules)
- Event Stream Analytics Server (ESA Analytics)

The first service is the Event Stream Analysis service that creates alerts from ESA rules, also known as ESA Correlation Rules, which you create manually or download from Live. The second service is the ESA Analytics service, which is used for Automated Threat Detection. Because the ESA Analytics service uses preconfigured modules for Automated Threat Detection, you do not have to create or download rules to use Automated Threat Detection.

NetWitness Suite Automated Threat Detection currently has two Suspicious Domain modules available, Command and Control (C2) for Packets and C2 for Logs.

Because each ESA Analytics module has different data requirements, be sure that all module-specific requirements are met before you deploy a module for Automated Threat Detection.

Automated Threat Detection for Suspicious Domains

The Suspicious Domains modules examine your HTTP traffic to detect domains likely to be malware Command and Control servers connecting to your environment. After NetWitness Suite Automated Threat Detection for Suspicious Domains examines your HTTP traffic, it generates scores based on various aspects of your traffic behavior (such as the frequency and regularity with which a given domain is contacted). If these scores reach a set threshold, an ESA alert is generated. This ESA alert is forwarded to the Respond view. The alert in the Respond view is enriched with data that helps you to interpret the scores to determine what mitigation steps to take.


The Automated Threat Detection Suspicious Domain modules provide scoring to detect Command and Control communications. Command and Control communications occur when malware has compromised a system and is sending data back to a source. Often, Command and Control malware can be detected via beaconing behavior. Beaconing occurs when the malware regularly sends communications back to the Command and Control server to notify it that a machine has been compromised and the malware is awaiting further instructions. The ability to catch the malware at this stage of compromise can prevent any further harm from occurring to the compromised machine and is considered a critical stage in the "kill chain."

NetWitness Suite Automated Threat Detection solves several common problems that occur when searching for malware:

- **Ability to use algorithms rather than signatures.** Because many malware creators have begun using polymorphic or encrypted code segments, which are very difficult to create a signature for, this approach can sometimes miss malware. Because NetWitness Suite Automated Threat Detection uses a behavior-based algorithm, it is able to detect malware more quickly and effectively.
- **Ability to automate hunting.** Hunting through data manually is an effective but extremely time-consuming method of finding malware. Automating this process allows an analyst to use his or her time more effectively.
- **Ability to find an attack quickly.** Instead of batching and then analyzing the data, Automated Threat Detection analyzes data as it is ingested by NetWitness Suite, allowing for the attacks to be found in near real-time.

Suspicious Domains Module Workflow

NetWitness Suite Automated Threat Detection works much like a filtering system. It checks to see if certain behavior occurs (or certain conditions exist), and if that behavior or condition occurs, it moves to the next step in the process. This helps to make the system efficient, and frees up resources so that events that are determined to be non-threatening are not held in memory. The following diagram provides a simplified version of the Suspicious Domains module workflow.

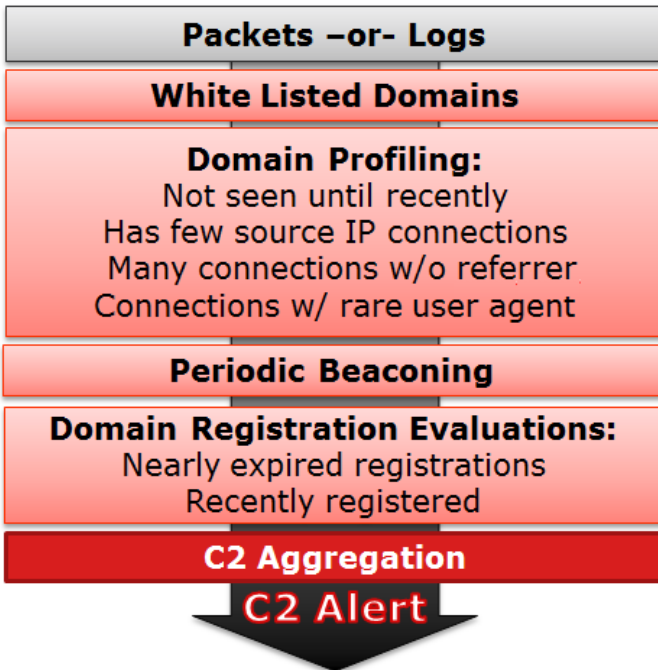

- 1.) **Packets or logs are routed to the ESA.** The HTTP packets or logs are parsed by the Decoder or Log Decoder and sent to the ESA host.
- 2.) **Whitelist is checked.** If you created a whitelist through the Context Hub, ESA checks this list to rule out domains. If a domain in the event is whitelisted, the event is ignored.
- 3.) **The domain profile is checked.** Automated Threat Detection checks to see if the domain is newly seen (approximately three days), has few source IP connections, has many connections without a referer, or has connections with a rare user agent. If one or several of these conditions is true, the domain is next checked for periodic beaconing.
- 4.) **The domain is checked for periodic beaconing.** Beaconing occurs when the malware regularly sends communications back to the command and control server to notify it that a machine has been compromised and the malware is awaiting further instructions. If the site displays beaconing behavior, then the domain registration information is checked.
- 5.) **Domain registration information is checked.** The Whois service is used to see if the domain is recently registered or nearly expired. Domains that have a very short lifespan are often hallmarks of malware.
- 6.) **Command and Control (C2) aggregates scores.** Each of the above factors generates a separate score, which is weighted to indicate various levels of importance. The weighted scores determine if an alert should be generated. If an alert is generated, the aggregated alerts appear in the Respond view and can then be investigated further from there. Once the alerts begin to appear in the Respond view, they continue to aggregate under the associated incident. This makes it easier to sort through volumes of alerts that can be generated for a command and control incident.

Analysts can view the alerts in the Respond view.

Suspicious Domains Automated Threat Detection on Packets vs. Web Proxy Logs

RSA NetWitness Suite provides you with the ability to perform Automated Threat Detection for Suspicious Domains using either packets or web proxy logs. While packet data can be streamed directly off of the wire into the NetWitness Suite installation and analyzed directly, if you have the ability to use a web proxy in your installation it may be beneficial to use it. Because some installations use network translation or SSL encryption, the true source IP of an outgoing connection may be masked if you are observing it at the packet level. By using a web proxy you gain the benefit of its ability to accelerate and decrypt SSL traffic as well as its ability to track the true source IP addresses of traffic it monitors.

Both Suspicious Domains for Packets (C2 for Packets) and Suspicious Domains for Logs (C2 for Logs) should produce the same results. From a results point of view, there is no real advantage to using one over the other.

Configuring Automated Threat Detection for Suspicious Domains

This topic tells administrators and analysts how to configure a Suspicious Domains module for NetWitness Suite Automated Threat Detection. The Automated Threat Detection functionality enables you to analyze the data that resides on one or more Concentrators by using preconfigured ESA Analytics modules. For example, using a Suspicious Domains module, an ESA Analytics service can examine your HTTP traffic to determine the probability that malicious activity is occurring in your environment.

There are two types of preconfigured Suspicious Domains modules available in NetWitness Suite: Command and Control (C2) for Packets and C2 for Logs. The Suspicious Domains module defines a subset of events and the activities executed on those events for identifying suspicious C2 domains.

Before you deploy an ESA Analytics module for Automated Threat Detection, it is important to note that there are many potential installation configurations that may be installed on the ESA, including: ESA Analytics, ESA Correlation Rules, and the Context Hub. Each of these may take up resources, so it is important to consider sizing before deploying Automated Threat Detection on your ESA.

Prerequisites

- If you are using Packet data, you must have configured a Decoder for HTTP packet data, and you must have configured an HTTP Lua or Flex parser.
- If you are using web proxy log data, you must have configured the appropriate Log Decoder with the correct parser for your web proxy.
- If you are using web proxy log data, you must have updated to the latest log parsers. The following parsers are supported: Blue Coat Cache Flow (cacheflowelf), Cisco IronPort WSA (ciscoportwsa), and Zscaler (zscalernss).
- If you are using web proxy log data, for best results you should configure all web proxies the same way (set to the same time zone, use the same collection method -syslog or batch, and if you use batch use the same batching cadence).
- A connection from the ESA host to the Whois service (same location as RSA Live cms:netwitness.com:443) must be opened on port 443. Verify with your System

Administrator that this is complete.

- To whitelist a domain, you need to enable the Context Hub service.

Important: Automated Threat Detection requires a "warm-up" period that acclimates the scoring algorithm to the traffic in your network. You should plan to configure Automated Threat Detection so that the warm-up period can run during normal traffic. For example, starting Automated Threat Detection on a Tuesday at 8:00 am in the timezone that contains the majority of your users allows the module to accurately analyze a day of normal traffic.

Configure Automated Threat Detection for Suspicious Domains

This procedure provides the steps needed to configure an ESA analytics Suspicious Domains module for Automated Threat Detection. ESA analytics modules, such as Suspicious Domains, are considered preconfigured because you do not have to manually create ESA rules for them.

The basic steps required are:


1. **Configure Log settings (for Logs only).** Before you can use Automated Threat Detection for Logs, you must configure several settings. Skip this step if you plan to use Automated Threat Detection for Packets.
2. **Create a whitelist (optional) using the Context Hub service.** Creating a whitelist allows you to ensure that commonly accessed websites are excluded from any Automated Threat Detection scoring.
3. **Configure the Whois Lookup service.** The Whois service enables you to get accurate data about domains that you connect to. In order to ensure effective scoring, it is important that you configure the Whois Lookup service. Verify that the Whois Service is reachable from your environment.
4. **Map data sources to ESA Analytics modules.** You define how NetWitness Suite Automated Threat Detection should automatically detect advanced threats by mapping a preconfigured ESA analytics module to multiple data sources, such as Concentrators, and an ESA analytics service.
5. **Verify the C2 incident rule is enabled and monitor for activity.** After mapping your Suspicious Domains module, a period of time is required for the scoring algorithm to warm-up. After the warm-up period, verify that the C2 rule is enabled in the Incident Rules and monitor to see if the rule is triggered.
6. **Verify that the incident rules are configured correctly.** When you view incidents in the Respond view, it is helpful if the incidents are grouped by Suspected C&C.


Step 1: (For Logs Only) Configure Log Settings

To configure Automated Threat Detection for Logs, you need to complete a few extra configuration steps:

- Verify that the supported parsers are enabled for your Log Decoder.
- Get the latest versions of the appropriate web proxy parser from RSA Live.
- Update the mapping on the Envision config file. This file is required to update the Log Decoder to work with the new meta available via the parsers.
- Verify that the table-map.xml file was updated correctly.
- Verify that the indexes were updated correctly.

To verify your parsers are running on your Log Decoder:

1. Go to **ADMIN > Services**.
2. Select your Log Decoder and select  > **View > Config**.
The Service Parsers Configuration section shows a list of enabled parsers.
3. Verify that the appropriate web proxy parser is enabled.

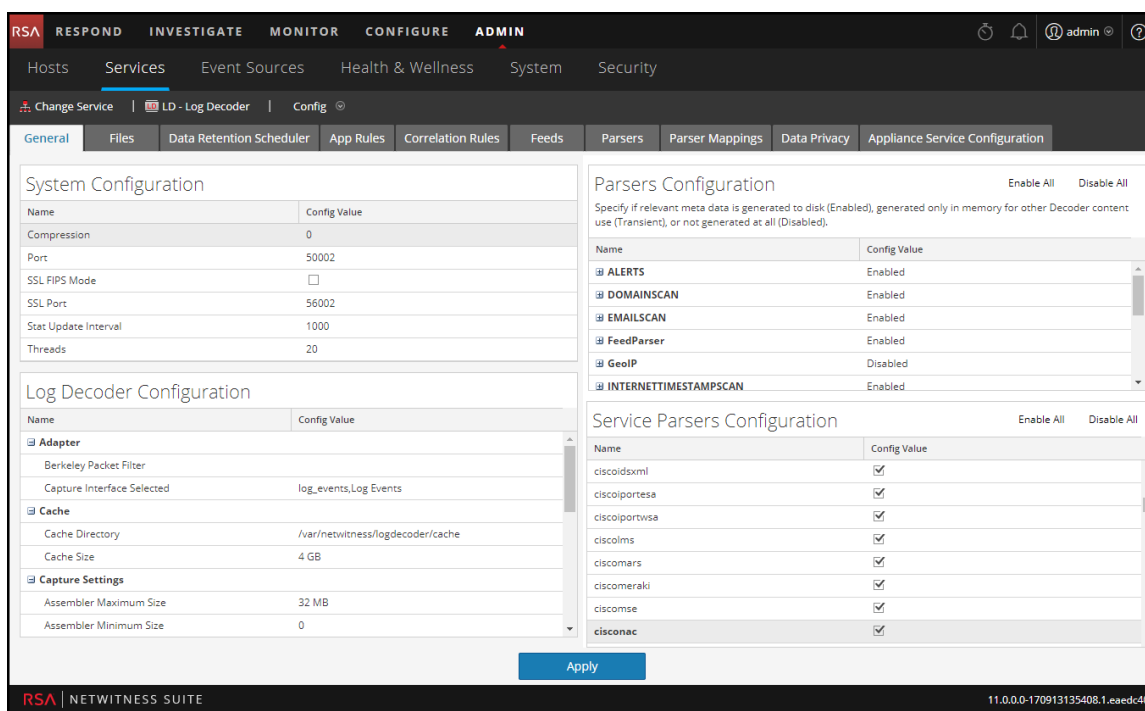

The screenshot displays the RSA NetWitness Suite configuration interface. The top navigation bar includes tabs for RESPOND, INVESTIGATE, MONITOR, CONFIGURE, and ADMIN. The ADMIN tab is active, and the 'Services' sub-tab is selected. The 'Log Decoder' configuration page is shown, with the 'Config' sub-tab active. The page is divided into three main sections: System Configuration, Log Decoder Configuration, and Parsers Configuration.

System Configuration

Name	Config Value
Compression	0
Port	50002
SSL FIPS Mode	<input type="checkbox"/>
SSL Port	56002
Stat Update Interval	1000
Threads	20

Log Decoder Configuration

Name	Config Value
Adapter	
Berkeley Packet Filter	
Capture Interface Selected	log_events, Log Events
Cache	
Cache Directory	/var/netwitness/logdecoder/cache
Cache Size	4 GB
Capture Settings	
Assembler Maximum Size	32 MB
Assembler Minimum Size	0

Parsers Configuration

Specify if relevant meta data is generated to disk (Enabled), generated only in memory for other Decoder content use (Transient), or not generated at all (Disabled).

Name	Config Value
ALERTS	Enabled
DOMAINSCAN	Enabled
EMAILSCAN	Enabled
FeedParser	Enabled
GeolIP	Disabled
INTERNETTIMESTAMPSCAN	Enabled

Service Parsers Configuration

Name	Config Value
ciscoidxml	<input checked="" type="checkbox"/>
ciscoportesa	<input checked="" type="checkbox"/>
ciscoportwsa	<input checked="" type="checkbox"/>
ciscolms	<input checked="" type="checkbox"/>
ciscomars	<input checked="" type="checkbox"/>
ciscomeraki	<input checked="" type="checkbox"/>
ciscomse	<input checked="" type="checkbox"/>
cisconac	<input checked="" type="checkbox"/>

An 'Apply' button is located at the bottom of the configuration page.


To get the latest parsers from RSA Live:

1. Go to **CONFIGURE > Live Content**.
2. Enter a search term for one of the supported web proxy parsers.
3. Select the appropriate web proxy parser [for example, the Blue Coat ELFF (cacheflowelff) parser].

Note: You should have taken steps to configure logging to occur on your web proxy parser correctly.

4. Click **Deploy**.

The Deployment Wizard opens.

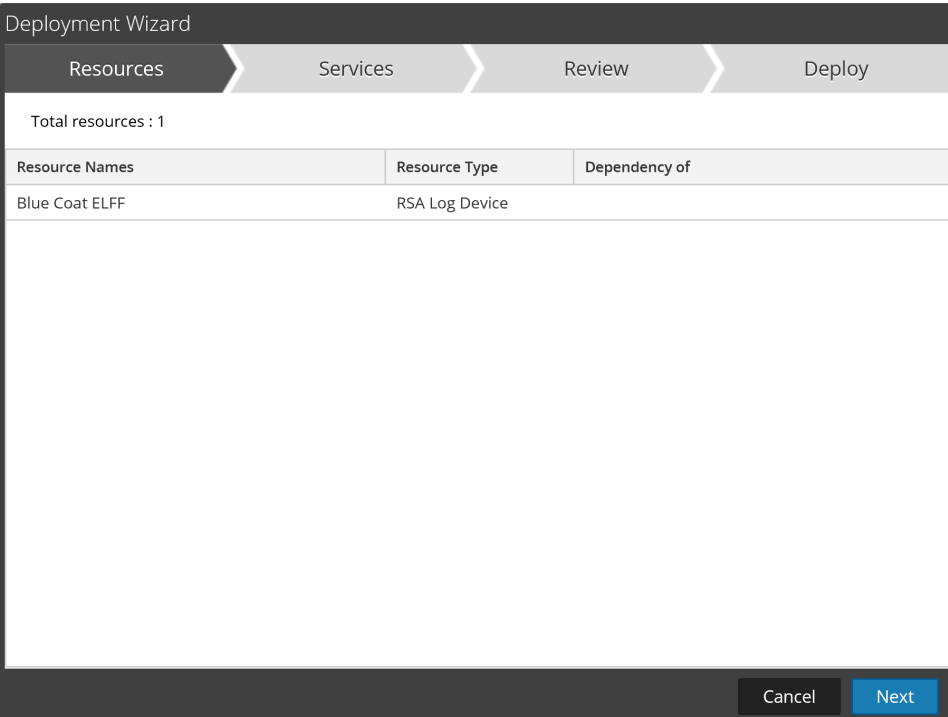

The screenshot shows the 'Deployment Wizard' window with four tabs: 'Resources', 'Services', 'Review', and 'Deploy'. The 'Resources' tab is active. Below the tabs, it says 'Total resources : 1'. A table lists the resources:

Resource Names	Resource Type	Dependency of
Blue Coat ELFF	RSA Log Device	

At the bottom right, there are 'Cancel' and 'Next' buttons.

5. Under **Services**, select the Log Decoder as the Service.
6. Click **Deploy** to deploy the parser to your Log Decoder.

To Get the Latest Envision Config File:

1. Go to **CONFIGURE > Live Content**.
2. Enter **envision** as the key word for the search.

3. Select the latest Envision Config file, and click **Deploy**.

The screenshot shows the RSA NetWitness Suite interface. On the left, there's a 'Search Criteria' panel with fields for Keywords (envision), Category (FEATURED, THREAT, IDENTITY, ASSURANCE, OPERATIONS, SPECTRUM, MALWARE ANALYSIS), Resource Types (Medium), Required Meta Keys, Generated Meta Values, and Resource Created Date. The main panel displays a table of 'Matching Resources' with columns: Subscribed, Name, Created, Updated, Type, and Description. The first row is highlighted, showing 'Envision Config File' with a 'Created' date of 2014-03-07 4:50 PM and an 'Updated' date of 2017-09-12 10:03 AM. Below the table, it says '291 Matching Resources'.

Subscribed	Name	Created	Updated	Type	Description
<input checked="" type="checkbox"/>	Envision Config File	2014-03-07 4:50 PM	2017-09-12 10:03 AM	Log Device	This file is used to update the Log De
<input type="checkbox"/>	Pulse Secure	2014-02-14 3:37 AM	2017-09-09 11:25 AM	Log Device	Log device content for event source Pul
<input type="checkbox"/>	Symantec AntiVirus/Endpol...	2014-02-14 3:51 AM	2017-09-11 5:30 AM	Log Device	Log device content for event source Syr
<input type="checkbox"/>	Cisco Secure ACS Appliance	2014-02-14 3:26 AM	2017-09-15 1:40 PM	Log Device	Log device content for event source Cis
<input type="checkbox"/>	Linux	2014-02-14 3:46 AM	2017-09-20 7:10 AM	Log Device	Log device content for event source Lin
<input type="checkbox"/>	Windows Events (ER)	2014-02-14 3:54 AM	2017-09-21 6:16 AM	Log Device	Log device content for event source Wir
<input type="checkbox"/>	Windows Events (NIC)	2014-02-14 3:55 AM	2017-09-21 6:16 AM	Log Device	Log device content for event source Wir
<input type="checkbox"/>	Cisco ASA	2014-02-14 3:24 AM	2017-09-09 9:40 AM	Log Device	Log device content for event source Cis
<input type="checkbox"/>	IntruShield	2014-02-14 3:36 AM	2017-09-09 11:21 AM	Log Device	Log device content for event source Intr
<input type="checkbox"/>	Snort/Sourcefire	2014-02-14 3:49 AM	2017-09-15 1:41 PM	Log Device	Log device content for event source Snc
<input type="checkbox"/>	Oracle	2014-02-14 3:45 AM	2017-09-22 1:17 PM	Log Device	Log device content for event source Ora
<input type="checkbox"/>	Fortinet FortiGate	2014-02-14 3:32 AM	2017-09-26 1:31 PM	Log Device	Log device content for event source For
<input type="checkbox"/>	Windows Events (Snare)	2014-02-14 3:55 AM	2017-09-21 6:16 AM	Log Device	Log device content for event source Wir
<input type="checkbox"/>	Blue Coat ELFF	2014-02-14 3:23 AM	2017-09-09 9:18 AM	Log Device	Log device content for event source Blu
<input type="checkbox"/>	Cisco Secure IDS XML	2014-02-14 3:24 AM	2017-09-09 9:42 AM	Log Device	Log device content for event source Cis
<input type="checkbox"/>	Citrix NetScaler	2014-02-14 3:27 AM	2017-09-12 1:21 PM	Log Device	Log device content for event source Citr
<input type="checkbox"/>	McAfee ePolicy Orchestrator	2014-02-14 3:31 AM	2017-09-09 11:16 AM	Log Device	Log device content for event source Mc
<input type="checkbox"/>	ISS RealSecure	2014-02-14 3:37 AM	2017-09-09 11:22 AM	Log Device	Log device content for event source ISS
<input type="checkbox"/>	Microsoft Exchange	2014-02-14 3:41 AM	2017-09-11 5:26 AM	Log Device	Log device content for event source Mic
<input type="checkbox"/>	Infoblox NIOS	2014-02-14 3:36 AM	2017-09-13 12:55 PM	Log Device	Log device content for event source Inf

4. In the Deployment Wizard, under **Services**, select your Log Decoder.
5. Click **Deploy** to deploy the Envision configuration file to the Log Decoder.

To Verify the Envision Configuration File was Updated Correctly:

1. Go to **ADMIN > Services**, select the Log Decoder, and then select > **View > Config > Files** tab.
You can see the **table-map.xml** file. This file is modified when you update the Envision Configuration file.
2. Search for the term, *event.time*. The field should now read, *"event.time" flags = "None"*. This means that the event.time meta is now included in the mapping. Similarly, the fqdn flag should be set to "None".


To Verify the Indices for the index-concentrator.xml File are Updated:

You will need to verify that the **index-concentrator.xml** file includes both the event.time and fqdn meta.

1. Go to **ADMIN > Services**, select your Concentrator, and then select > **View > Config**.
2. On the Files tab, search for the **index-concentrator.xml** file.

3. Verify that the following entry exists in your index-concentrator.xml file. If not, you will need to ensure your Concentrator is upgraded to the correct version:

```
<key description="FQDN" level="IndexValues" name="fqdn" format="Text" valueMax="100000" defaultAction="Open"/><key description="Event Time" format="TimeT" level="IndexValues" name="event.time" valueMax="0" />
```

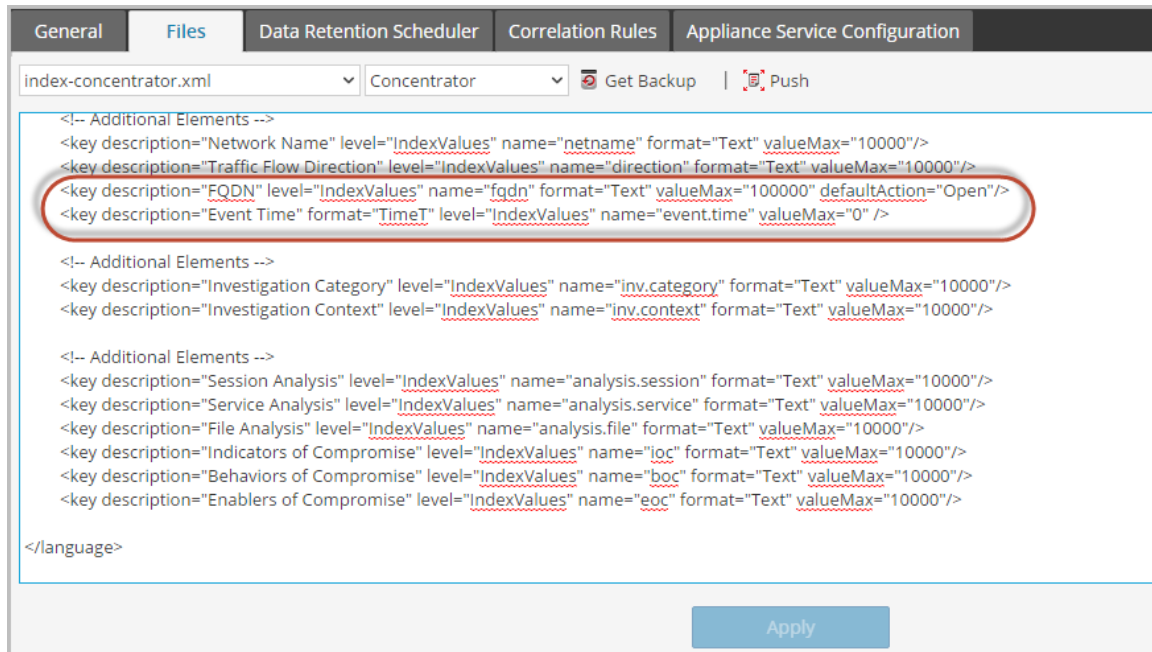


Step 2: Create a Domains Whitelist (Optional)


This procedure is used when working with Automated Threat Detection to ensure that certain domains do not trigger a threat score. Sometimes, a domain you access regularly may trigger an Automated Threat Detection score. For example, a weather service might have similar beaconing behavior as a Command and Control communication and trigger an unwarranted negative score. When this happens, it is called a false positive. To prevent triggering a false positive with a specific domain, you can add the domain to a whitelist. Most domains do not need to be whitelisted because the solution only alerts on very suspect behaviors. The domains you may want to whitelist are valid automated services that do not have many host connections.


Note: For migrations from 10.6.x, if your previous Automated Threat Detection whitelist (Whitelisted Domains) appears on the Lists tab, you can rename it to **domains_whitelist** to use it for the Suspicious Domains modules.

1. Create a whitelist for domains in Context Hub named **domains_whitelist**:
 - a. Go to **ADMIN > Services**, select the Context Hub Server service, and then select **View > Config > Lists** tab.

The Lists tab shows the current lists in the Context Hub.

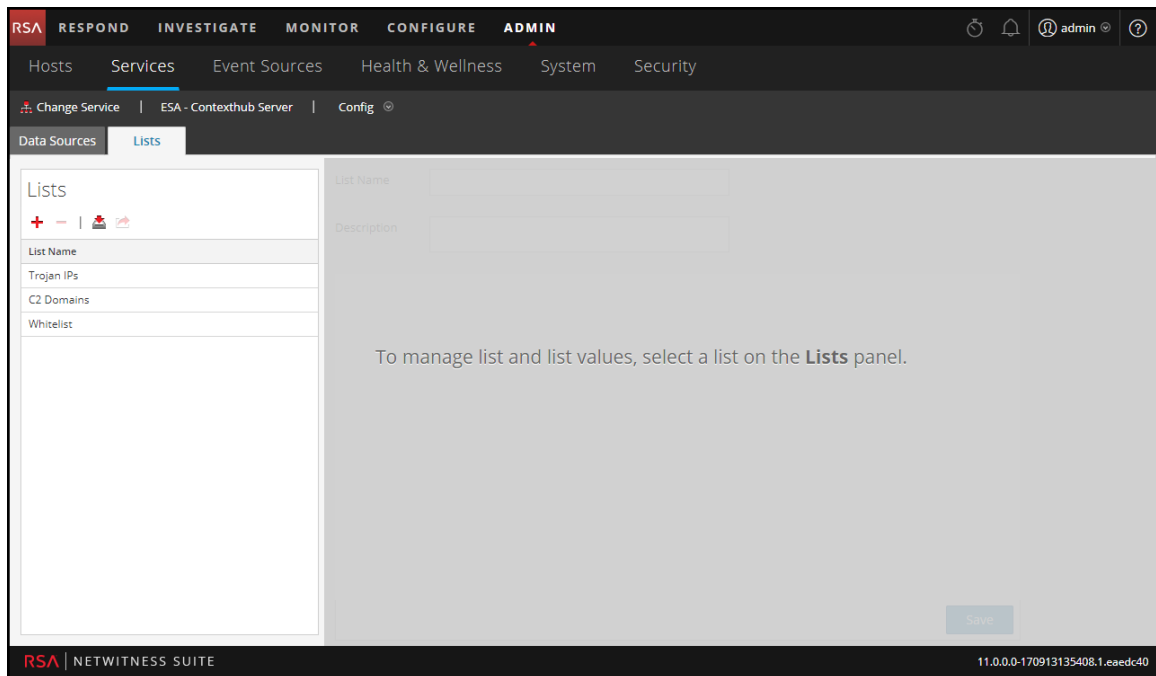

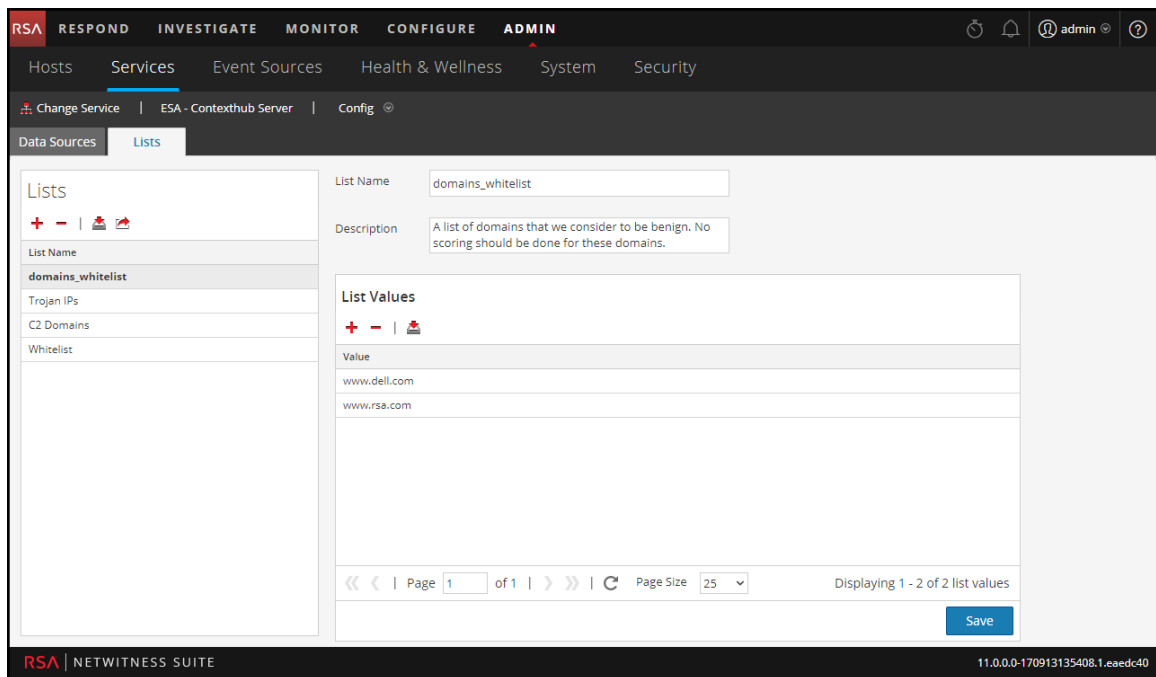


- b. In the Lists panel, click  to add a list. In the **List Name** field, type **domains_**
whitelist. You must use this name in order for the module to recognize it.



- Manually add domains to the list or import a .CSV file containing a list of domains. You can enter full domains, or you can use a wild card to include all sub-domains for a given domain. For example, you can enter *.gov to whitelist all government IP addresses. However, you cannot use other regex functions, such as [a-z]*.gov. This is because using

*.gov replaces an entire string, such as www.irs.gov.

- a. To add domains manually, in the **List Values** section, click  to add domains.
 - b. To remove a domain, select the domain and click .
 - c. To import a .CSV file, in the **List Values** section, click , and in the **Import List Values** dialog, navigate to the .CSV file. Choose from the following delimiters: Comma, LF (Line Feed), and CR (Carriage Return) depending on how you have separated the values in your file. Click **Upload**.
3. Click **Save**.
- The **domains_whitelist** appears in the Lists panel. Analysts can add to this list from the Respond view and other parts of Investigation. The *Context Hub Configuration Guide* provides additional information.

Step 3: Configure the Whois Lookup Service

See the "Configure Whois Lookup Service" topic in the *ESA Configuration Guide*.

Step 4: Map Data Sources to ESA Analytics Modules

See the "Mapping ESA Data Sources to Analytics Modules" topic in the *ESA Configuration Guide*.

Step 5: Verify the Suspected Command & Control By Domain Rule is Enabled and Monitor the Rule

Verify the Suspected Command & Command Control by Domain rule in the Incident Rules.

1. Go to **CONFIGURE > Incident Rules > Aggregation Rules**.

2. Select the **Suspected Command & Control Communication by Domain** Rule, and double-click to open it.

The screenshot shows the RSA NetWitness Suite configuration interface. The top navigation bar includes tabs for RESPOND, INVESTIGATE, MONITOR, CONFIGURE, and ADMIN. The CONFIGURE tab is active, and the Incident Rules section is selected. The rule being edited is 'Suspected Command & Control Communication By Domain'.

Aggregation Rules | [Edit Rule] Suspected Com...

Enabled ☒

Name* Suspected Command & Control Communication By Domain

Description This incident rule captures suspected communication with a Command & Control server and groups results by domain.

Match Conditions* ☒ Query Builder ☐ Advanced

All of these

Source	Is equal to	Event Stream Analysis	-
Alert Rule Id	Is equal to	Suspected C&C	-

Action ☒ Group into an Incident ☐ Suppress the Alert

Grouping Options*

Group By: Domain

Time Window: 7 Days

Incident Options

Title: Suspected C&C with \${groupByValue1}

Summary: Security Analytics detected communications with \${groupByValue1} that may be command and control malware.

RSA | NETWITNESS SUITE 11.0.0.0-170913135408.1.eaedc40

3. Verify that **Enabled** is selected.

The Rule displays a green Enabled button when it is enabled.

Result










After you deploy the ESA Analytics Suspicious Domains module mapping for Automated Threat Detection, your ESA will begin to perform analytics on the HTTP traffic. You can view detailed information for each incident in the Respond view.

Step 6: Verify the Incident is grouped by Suspected C&C

In order to group incidents correctly the Respond view, set the Group By condition to Domain.

1. Go to **CONFIGURE > Incident Rules > Aggregation Rules**.
2. Select the **Suspected Command & Control Communication by Domain** rule, and double-click to open it.

3. Verify that the **Group By** field is set to *Domain*.

Action	<input checked="" type="radio"/> Group into an Incident <input type="radio"/> Suppress the Alert	
Grouping Options*	Group By	Domain 
	Time Window:	7   Days 
Incident Options	Title	Suspected C&C with \${groupByValue1} 
	Summary	Security Analytics detected communications with \${groupByValue1} that may be command and control malware.  
	Categories	
	Assignee	

This will aggregate alerts and incidents will be created for "Suspected C&C".

Next Steps

Monitor the Respond view to see if the rule is triggered. The *NetWitness Respond User Guide* provides additional information.

Troubleshooting NetWitness Suite Automated Threat Detection

NetWitness Suite Automated Threat Detection is an analytics engine that examines your HTTP data. It also makes use of other components, such as the Whois and Context Hub services, which can add complexity to your installation. This topic provides suggestions to help you find issues if your Automated Threat Detection deployment does not provide the results that you expect.

Possible Issues

Problem	Possible Causes	Solutions
I'm seeing too many alerts (false positives).	Several	One possible cause is that the Whois Lookup service is failing or is not configured. The Whois lookup is helpful in determining whether a URL is valid, and if the connection fails or is not properly configured, it can result in false positives. See the "Configure Whois Lookup Service" topic in the <i>ESA Configuration Guide</i> .
		You may need to whitelist URLs. Sometimes the legitimate behavior for a URL triggers an alert. One way to prevent this from occurring is to add the URL to the whitelist. See the "Add an Entity to a Whitelist" topic in the <i>NetWitness Respond User Guide</i> .
I'm not seeing any alerts.	The ESA host requires a "warm-up" period when you deploy an ESA Analytics Module Mapping for Automated Threat Detection.	When you deploy an ESA analytics module mapping for Automated Threat Detection, there is a "warm-up" period, during which no alerts are viewable. Each module type has a default warm-up period and you need to wait until the warm-up period is complete. For more information, see the "Mapping ESA Data Sources to Analytics Modules" topic in the <i>ESA Configuration Guide</i> .

Problem	Possible Causes	Solutions
I'm seeing performance issues (more resource usage or a drop in throughput).	Several	If you are having performance issues on an ESA host that is running both Automated Threat Detection (ESA Analytics) and ESA rules, follow the troubleshooting steps for rules. For these troubleshooting steps, go to "Troubleshoot ESA" in the <i>Alerting Using ESA Guide</i> .

