



Alerting with ESA Correlation Rules User Guide

for RSA NetWitness® Platform 11.3



Copyright © 1994-2019 Dell Inc. or its subsidiaries. All Rights Reserved.

Contact Information

RSA Link at <https://community.rsa.com> contains a knowledgebase that answers common questions and provides solutions to known problems, product documentation, community discussions, and case management.

Trademarks

For a list of RSA trademarks, go to www.emc.com/legal/emc-corporation-trademarks.htm#rsa.

License Agreement

This software and the associated documentation are proprietary and confidential to Dell, are furnished under license, and may be used and copied only in accordance with the terms of such license and with the inclusion of the copyright notice below. This software and the documentation, and any copies thereof, may not be provided or otherwise made available to any other person.

No title to or ownership of the software or documentation or any intellectual property rights thereto is hereby transferred. Any unauthorized use or reproduction of this software and the documentation may be subject to civil and/or criminal liability.

This software is subject to change without notice and should not be construed as a commitment by Dell.

Third-Party Licenses

This product may include software developed by parties other than RSA. The text of the license agreements applicable to third-party software in this product may be viewed on the product documentation page on RSA Link. By using this product, a user of this product agrees to be fully bound by terms of the license agreements.

Note on Encryption Technologies

This product may contain encryption technology. Many countries prohibit or restrict the use, import, or export of encryption technologies, and current use, import, and export regulations should be followed when using, importing or exporting this product.

Distribution

Dell believes the information in this publication is accurate as of its publication date. The information is subject to change without notice.

April 2019

Contents

Getting Started with ESA	9
Data Source Configuration Changes	10
An Endpoint Risk Scoring Rules Bundle is available in NetWitness Platform	10
How ESA Generates Alerts	10
Best Practices	11
Understand Event Stream Analysis Rule Types	11
Best Practices for Writing Rules	12
Best Practices for Working with RSA Live Rules	13
Best Practices for Deploying Rules	13
Best Practices for System Health	13
Troubleshoot ESA	15
Troubleshoot ESA Correlation Services	15
Troubleshoot RSA Live Rules for ESA	16
Troubleshoot ESA Rules	17
Steps to Troubleshoot Memory Issues with an ESA Service Offline	20
View Memory Metrics for Rules	28
Prerequisites	28
View Memory Metrics for an ESA Correlation Service in Health & Wellness	29
View Memory Metrics for an ESA Correlation Service and its ESA Rules	30
How ESA Handles Sensitive Data	33
How ESA Treats Sensitive Data from Core Services	33
Advanced EPL Rule	33
Enrichment Source	34
ESA Rule Types	35
Starter Pack Rules	35
Endpoint Risk Scoring Rules Bundle	35
Trial Rules Mode	36
Role Permissions	36
Practice with Starter Pack Rules	37
Rule Library	38
Practice with Starter Pack Sample Rules	38
Work with Trial Rules	40
Deploy Rules as Trial Rules	40

Add Rules to the Rule Library	42
Download Configurable RSA Live ESA Rules	43
Prerequisites	43
Download RSA Live ESA Rules	43
Customize an RSA Live ESA Rule	46
Prerequisites	47
Configure Parameters for an RSA Live ESA Rule	47
Add a Rule Builder Rule	48
Step 1. Name and Describe the Rule	48
Prerequisites	48
Name and Describe a Rule	48
Step 2. Build a Rule Statement	50
Example	50
Prerequisites	50
Build a Rule Statement	50
To Add a Whitelist	52
To Add a Blacklist	52
Example: Blacklist	53
Example: Ignoring Case, Strict Pattern Matching, and Using The Is Not Null Operator	53
Example Results	57
Example: Grouping the Rule Results	58
Example: Working with Numeric Operators	59
Step 3. Add Conditions to a Rule Statement	60
Example	60
Add Conditions to a Rule Statement	61
Example	62
Add an Advanced EPL Rule	63
Prerequisites	63
Add an Advanced EPL Rule	63
Event Processing Language (EPL)	65
ESA Annotations	66
@RSAAlert Annotation	66
@RSAPersist Annotation	67
@UsesEnrichment (10.6.1.1 and later)	68
@Name	68
Sample Advanced EPL Rules	68
Example #1:	69
EPL #1:	69
EPL #2:	69
Example #2:	70

EPL #3:	70
EPL #4: Using NamedWindows and match recognize	70
EPL #5: Using Every @RSAAlert(identifiers={"user_src"})	71
Example #3:	71
EPL #6: @RSAAlert(identifiers={"ip_src"})	71
EPL #7: @RSAAlert(identifiers={"ip_src"})	72
Example #4:	73
EPL #8: using groupwin , time_length_batch and unique	73
Example #5:	73
EPL #9: using groupwin , time_length_batch and unique	73
Example #6:	74
EPL #10: using groupwin , time_length_batch and unique	74
Example #7:	74
EPL #11: @RSAAlert(oneInSeconds=0)	75
Working with Rules	76
Edit, Duplicate or Delete a Rule	76
Edit a Rule	76
Duplicate a Rule	76
Delete a Rule	76
Filter or Search for Rules	77
Prerequisites	77
Filter Rules	77
Search for Rules	78
Import or Export Rules	78
Import ESA Rules	78
Export ESA Rules	79
Choose How to be Notified of Alerts	80
Notification Methods	80
Add Notification Method to a Rule	82
Prerequisites	82
Add a Notification Method to a Rule	82
Add a Data Enrichment Source	84
Sample Rule with Enrichment	84
Enrichment Sources	86
Configure In-Memory Table as an Enrichment Source	87
Prerequisites	87
Configure an Ad hoc In-Memory Table	87
Add a Recurring in-Memory Table	91
Configuring an Esper Query as an Enrichment Source	92
Workflow	92

Prerequisites	93
Configure an In-Memory Table Using an EPL Query	93
Example	95
Step 1: Create Your Rule	95
Step 2: Create the Enrichment	97
Step 3: Add the Enrichment to the Rule	98
Configure Context Hub List as an Enrichment Source	100
Prerequisites	100
Configure a Context Hub List as an Enrichment Source	100
Add an Enrichment to a Rule	102
Deploy Rules to Run on ESA	104
How an ESA Rule Deployment Works	104
ESA Rule Deployment Steps	105
Step 1. Add an ESA Rule Deployment	105
Step 2. Add an ESA Service	107
Step 3. Add Data Sources	109
Step 4. Add and Deploy Rules	113
Deploy the Endpoint Risk Scoring Rules Bundle	116
Additional ESA Rule Deployment Procedures	117
Replace an ESA Service in an ESA Rule Deployment	117
Add or Remove a Data Source	118
Edit or Delete a Rule in a Deployment	118
Edit the ESA Rule Deployment Name or Delete a Deployment	119
Show Updates to an ESA Rule Deployment	120
View ESA Stats and Alerts	122
View Stats for an ESA Service	122
View ESA Stats	122
Enable or Disable Rules	123
Refresh the Statistics	123
View a Summary of Alerts	124
ESA Alert References	127
New Advanced EPL Rule Tab	128
What do you want to do?	128
Related Topics	128
Advanced EPL Rule	128
Build a Statement Dialog	132
What do you want to do?	132
Related Topics	132
Build a Statement Dialog	132
Deploy ESA Rules Dialog	136

What do you want to do?	136
Related Topics	136
Deploy ESA Rules Dialog	136
Deploy ESA Services Dialog	138
What do you want to do?	138
Related Topics	138
Deploy ESA Services Dialog	138
Rule Builder Tab	140
What do you want to do?	140
Related Topics	140
Rule Builder	140
Rules Tab	146
What do you want to do?	146
Related Topics	146
Quick Look	147
Rules Tab Options Panel	148
What do you want to do?	148
Related Topics	148
Options Panel	148
Rules Section	148
Deployments Section	148
Rule Library Panel	150
What do you want to do?	150
Related Topics	150
Rule Library Panel	150
Rule Library Toolbar	151
Rule Library List	151
Deployment Panel	153
What do you want to do?	153
Related Topics	153
Deployment Panel	154
ESA Services	154
Data Sources	155
Deployment Options	155
ESA Rules	156
Rule Syntax Dialog	157
Rule Syntax Dialog	157
Services Tab	159
What do you want to do?	159
Related Topics	159

Services	159
ESA Services Panel	160
General Stats Panel	160
Deployed Rule Stats Panel	161
Settings Tab	163
What do you want to do?	163
Related Topics	163
Settings	163
Meta Key References	164
Enrichment Sources	164
Database Connections	165
Updates to the Deployment Dialog	167
What do you want to do?	167
Related Topics	167
Deployment Dialog	167

Getting Started with ESA

This topic covers quick start topics for RSA NetWitness® Platform Event Stream Analysis (ESA) to help you get started in using ESA. The following topics are designed to assist you in working with ESA Correlation Rules.

- [Best Practices](#) helps you to understand how to best set up, deploy, and create rules.
- [Troubleshoot ESA](#) helps you to troubleshoot different aspects of ESA, including rule writing and deployment.
- [View Memory Metrics for Rules](#) helps you to work with memory metrics to understand memory usage for ESA services.

There are two ESA services that can run on an ESA host:

- ESA Correlation (ESA Correlation Rules)
- Event Stream Analytics Server (ESA Analytics)

The first ESA service is the ESA Correlation service that creates alerts from ESA rules, also known as ESA Correlation Rules, which you create manually or download from Live.

For NetWitness Platform 11.3 and later, the ESA Correlation service replaces the Event Stream Analysis service and is also known as ESA Correlation Server. The ESA Correlation service provides the same services as the Event Stream Analysis service with the added benefit of enabling you to specify different data sources for your ESA correlation rules. Like the Event Stream Analysis service, the ESA Correlation service installs on the ESA Primary and ESA Secondary host types.

This user guide covers alerting using ESA Correlation Rules. It is intended for Threat Intel personnel (Content Experts), who configure data sources and inputs to NetWitness Platform. For information on configuring ESA Correlation Rules, see the "Configure ESA Correlation Rules" section of the *ESA Configuration Guide*.

The second ESA service is the ESA Analytics service, which is used for Automated Threat Detection. Because the ESA Analytics service uses preconfigured ESA Analytics modules for Automated Threat Detection, you do not have to create or download rules to use it. For information on the ESA Analytics service, see the *Automated Threat Detection Configuration Guide* and the "Configure ESA Analytics" section of the *ESA Configuration Guide*.

Note: The Contexthub Server service, which provides enrichment lookup capability in the Respond and Investigate views, runs only on an ESA Primary host. For information, see the *Context Hub Configuration Guide*.

Data Source Configuration Changes

In NetWitness Platform version 11.3 and later, the ESA Correlation service enables you to specify different data sources for different sets of rules. Instead of adding data sources, such as Concentrators, to the entire ESA Correlation service, you can specify different data sources for each ESA rule deployment. An ESA rule deployment includes an ESA Correlation service with its associated data sources and a set of ESA rules. For example, you may want to use Concentrators with HTTP packet data in one deployment and Concentrators with HTTP log data in another deployment. For more detailed information, see [Deploy Rules to Run on ESA](#).

An Endpoint Risk Scoring Rules Bundle is available in NetWitness Platform

An Endpoint Risk Scoring Rules Bundle, which contains approximately 400 rules, comes with NetWitness Platform 11.3 and later. Endpoint risk scoring rules only apply to NetWitness Endpoint. You can add the Endpoint Risk Scoring Rules Bundle to an ESA rule deployment in the same way that you would add any ESA rule. However, you must specify endpoint data sources (Concentrators) in the ESA Rule Deployment.

The ESA Correlation service can process endpoint risk scoring rules, which generate alerts that are used in risk scoring calculations to identify suspicious files and hosts. To turn on risk scoring for NetWitness Endpoint, you must deploy endpoint risk scoring rules on ESA. For instructions, see "Deploy Endpoint Risk Scoring Rules on ESA" in the *ESA Configuration Guide*. For complete information on configuring NetWitness Endpoint, see the *NetWitness Endpoint Configuration Guide*.

Go to the [Master Table of Contents](#) to find all NetWitness Platform Logs & Network 11.x documents.

How ESA Generates Alerts

The ESA Correlation service runs rules that specify criteria for problem behavior or threatening events in your network. When ESA detects a threat that matches rule criteria, it generates an alert.

To generate alerts, ESA performs the following functions:

1. Gathers data
2. Runs ESA rules against the data
3. Captures events that meet rule criteria
4. Generates alerts for those captured events

Best Practices

Best practices provide guidelines to help you write and manage rules, deploy rules, and maintain system health for your ESA services.

Understand Event Stream Analysis Rule Types

The ESA Correlation service provides advanced stream analytics such as correlation and complex event processing at high throughputs and low latency. It is capable of processing large volumes of disparate event data from Concentrators. However, when working with Event Stream Analysis, you should be aware of the factors that affect resource usage in order to create effective rules.

Each event that is received by ESA is evaluated to determine if it may trigger a rule. There are three types of rules that can be deployed in order to determine what the ESA engine should do with the incoming event. Each of these rule types have different impacts on system resource utilization. All three rule types may be created via the Rule Builder, Advanced Event Processing Language (EPL) rules, or downloaded via RSA Live. The table below lists the rule type and the impact this rule may have on system resources.

Rule Type	Description
Simple Filter Rule	<p>This rule has no correlation to other events. At ingestion time, this rule is evaluated against a set of conditions, and if those conditions are met an alert is generated. If no conditions match, the event is quickly released by the engine to free up memory usage. These rules do not take up memory since the events are not retained beyond the initial evaluation. The memory resource usage does not increase as more simple filter rules are deployed. However, if the filter condition is too generic, it is possible that this rule can generate too many alerts, which will strain the system resources for the storage and retrieval of these alerts.</p> <p>For example, you might write a rule to generate an alert when HTTP network activity arrives over a non-standard HTTP port.</p>
Event Window Rule	<p>This rule evaluates a set of events over a time period for specific conditions. At ingestion time, the rule is evaluated against a set of conditions. If those conditions are met, the event is retained in memory for a specific amount of time. After the specified time passes, the events are removed from the time window if the number of events collected does not meet the threshold to trigger an alert. The memory consumption of such rules is highly dependent on the incoming event rate (traffic), the amount of data per event, and the time length specified in the event window. Each matching event is retained in memory until the time window has passed, so the longer the time window, the greater the potential volume. For example, you might write a rule that generates an alert if a user has five failed login attempts within a ten minute time frame.</p>

Rule Type	Description
Followed By Rule	<p>This rule evaluates a chain of incoming events to determine if the sequence of events matches a particular condition. At ingestion time, the rule is evaluated against a set of conditions. If the conditions are met, one of two actions occurs:</p> <ul style="list-style-type: none"> • If this is the first event of the sequence, a new event thread is started, and the event is retained as the head of the sequence. • If the event belongs to an existing event thread, it is added to that sequence. <p>In both cases, the event is retained in memory. The amount of resource usage is particularly sensitive to the customer environment for this type of rule. If the filter condition generates many event threads, resources are consumed for each new thread (in addition to the event). Additionally, if the end of the event thread is never met (that is, an alert is never generated), then the entire event is saved in memory indefinitely. For example, you might write a rule to generate an alert when a user fails to log in to a server, then performs a successful login, and then creates a new account.</p>

Note: ESA sends alerts to NetWitness Respond for processing and the alerts are eventually stored in a database. If your rule creates too many alerts, it can slow down another part of the system.

When writing and deploying rules, you should be aware that rule memory usage and alert generation consume system resources. The sections below are designed to help you keep your usage at a healthy level and monitor for problems if systems are becoming overloaded.

Best Practices for Writing Rules

These are general guidelines for writing rules.

- **Create alerts for actionable events.** The purpose of an alert should be to notify you of an event that requires immediate and specific action. For events that do not require action, or only require you to have awareness of the event, you can create a report.
- **Configure new rules as trial rules so you can observe how they react in your environment.** If you deploy new rules as trial rules, they will be disabled if the configured memory threshold is exceeded.
- **Configure Alert notifications only after your rule testing and tuning is complete.** This can help ensure you do not get flooded with notifications if a rule behaves differently than you expect.
- **Rules need to be specific so that you limit resource usage.** Use the following guidelines to limit usage:
 - Make the filters on the rule exclude all but the necessary events for the rule to fire accurately.
 - Make the size of your windows (window time for correlation) as small as possible.

- Limit the events that you include in the window: For example, if you only want to see IDS events, ensure that you only include those events in your time window.
- **Rules need to be tuned to an alert level that is manageable.** If you are flooded with alerts, then the purpose and utility of an alert is lost. For example, maybe you want to know about encrypted traffic to other countries. But, you could limit the list to countries that are known risks. This limits the volume of alerts to a level you can manage.

Best Practices for Working with RSA Live Rules

These are guidelines for RSA Live Rules.

- **Deploy RSA Live rules in small batches.** Not every rule is suited to every environment. The best way to ensure your RSA Live rules are successful is to deploy them in small batches so you can test them in your environment. If you deploy small batches, it's much easier to tell if a particular rule has an issue.
- **Read the rule descriptions provided with RSA Live rules.** ESA rules are not “one size fits all.” Not all rules will work in your environment. The rule descriptions tell you which parameters you will need to modify to successfully deploy a rule in your environment.
- **Set your parameters.** RSA Live rules have parameters that need to be modified. If you do not modify your parameters, the rule may not work or it may exhaust your memory.
- **Deploy new rules as trial rules so you can observe how they react in your environment.** If you deploy new rules as trial rules, they will be disabled if the configured memory threshold is exceeded. For more details, see [Work with Trial Rules](#).

Best Practices for Deploying Rules

These are general guidelines for deploying rules.

- **Deploy rules in small batches so you can observe how they react in your environment.** Not all environments are the same, and a rule will need to be tuned for memory usage, alert volume, and effective detection of events.
- **Test rules before you configure alert notifications.** Configure Alert notifications only after your rule testing and tuning is complete. This can help ensure you do not get flooded with alerts if a rule behaves differently than you expect.
- **Monitor system health as a part of your deployment process.** When you deploy rules, monitor your system's health as a part of your deployment process. You can view total memory usage for your ESA in the Health and Wellness tab. For more information, see "View Detailed Statistics in Health and Wellness" in [Troubleshoot ESA](#).

Best Practices for System Health





These are general guidelines for system health.

- **Set up new rules as trial rules.** A common issue is that new rules may cause memory issues. To prevent this, you can set up new rules as trial rules. If the configured memory threshold is met, all trial rules are disabled to prevent the system from running out of memory. For more information about trial rules, see [Work with Trial Rules](#).
- **Set up thresholds in Health & Wellness to alert you if memory usage is too high.** There are metrics in NetWitness Platform Health & Wellness that track memory usage. You can set up alerts and notifications to send you an email if those thresholds are crossed. For more information about the memory statistics you can view, see [View Memory Metrics for Rules](#).
- **Monitor memory metrics for each rule in Health & Wellness.** For each rule, you can view the estimated memory usage in Health & Wellness. You can use this information to ensure that rules do not use too much memory. For more information about the memory statistics you can view, see [View Memory Metrics for Rules](#).

Troubleshoot ESA

This section describes common issues that may occur while using ESA, and it suggests common solutions to these problems.

Troubleshoot ESA Correlation Services

Problem	Possible Causes	Solutions
<p>On the NetWitness Platform Dashboard, the ESA service appears in red to indicate it is offline.</p> <p>In the CONFIGURE > ESA Rules view, the following message appears: "The Service is either offline or not reachable."</p>	Several	<p>When an ESA Correlation service is offline, there are many possible causes. However, a common issue is that you have created a rule that uses excessive memory and causes the ESA service to fail. To troubleshoot this problem, see Steps to Troubleshoot Memory Issues with an ESA Service Offline.</p> <p>Other common causes might be that your firewall is blocking the connection between the ESA and NetWitness Platform, or the ESA Correlation service machine may be down.</p> <p>To bring up ESA Services:</p> <p>Go to ADMIN > Services, select your ESA service, and then select   > Start.</p> <p>If your ESA service is stopping and restarting in a loop, you may need to call Customer Support to get the services to start.</p>
<p>After a recent upgrade, the ESA service appears in red on the NetWitness Platform Dashboard to indicate it is offline.</p> <p>In the CONFIGURE > ESA Rules view, the following message appears: "The Service is either offline or not reachable."</p>	Configuration issues	<p>If your system has been recently upgraded, you may have made a configuration error. Go to ADMIN > Services, select your ESA service, and then select   > Edit. In the Edit Service dialog, click Test Connection. If the connections fails, you likely have a configuration error. Attempt to fix your configuration error and try again.</p>

Troubleshoot RSA Live Rules for ESA

Problem	Possible Causes	Solutions
I imported a group of rules from RSA Live, and now my ESA service is crashing. Why?	You may not have configured the parameters for the RSA Live rule to tune it for your environment.	<p>Each rule in RSA Live has a description that includes the parameters you must configure and prerequisites for your environment. Review this description to see if the rule is appropriate for your environment.</p> <p>To ensure that you deploy rules safely in your environment, configure new rules as trial rules to test them in your environment. Trial rules add a safeguard for testing new rules. For details on this, see Deploy Rules as Trial Rules.</p>
I imported a group of rules from RSA Live, and while the rules deployed without errors, they were later disabled.	Not all RSA Live rules are meant for every environment. You may not have the correct meta in your ESA for the rule to run.	<p>You can verify that a rule was disabled by going to CONFIGURE > ESA Rules > Services > Deployed Rule Stats. If the rule is disabled, the green icon does not display next to the rule.</p> <p>If a rule deployed correctly but was disabled, check the logs for exceptions related to the rule. Specifically, check to see if the rules were disabled due to missing meta. To do this, go to the ESA Correlation logs. You can use SSH to get in the system and go to:</p> <pre>/var/log/netwitness/correlation-server/correlation-server.log.</pre> <p>Then, search for a message similar to the following:</p> <pre>"Property named '<meta_name>' is not valid in any stream"</pre> <p>For example, you might see:</p> <pre>Failed to validate filter expression '(medium=1 and streams=2 or medium=3...(238 chars)': Property named 'tcp_flags_seen' is not valid in any stream</pre> <p>If a similar message displays, you may need to add a custom meta key to the Log Decoder or Concentrator. To do this, follow these instructions: "Create Custom Meta Keys Using Custom Feed" in the <i>Decoder and Log Decoder Configuration Guide</i>.</p>

Troubleshoot ESA Rules

Problem	Possible Causes	Solutions
I have an ESA rule that is not getting deployed and is not creating alerts.	A meta key that the rule uses is a string array type, but it shows as a string type on ESA.	<p>Check to see if any string array meta keys that the rule uses are configured as string array types on ESA. Go to CONFIGURE > ESA Rules > Settings tab (Meta Key References).</p> <ul style="list-style-type: none"> • If it shows <code>string[]</code>, it is configured as a string array type on ESA. This is fine. • If it shows <code>string</code> without the brackets, it is configured as a string type and you need to fix it on ESA. <p>In the ESA Correlation service Explore view, go to <code>correlation/stream</code>. Add string array meta keys to the multi-valued list to allow them to be used as an array in ESA rules. Go back to the Meta Key References and click the refresh icon (↻).</p> <p>Verify that the meta keys with a string array type show a value of <code>.string[]</code>. For additional details, see "Configure Meta Keys as Arrays in ESA Correlation Rules" in the <i>ESA Configuration Guide</i>.</p>
I created a rule, and I checked the syntax. The rule looked fine. When I went to deploy the rule, I got an error. Why?	You may not have the correct meta to deploy the rule.	<p>Check the Meta Key References. You may not have the correct meta to deploy the rule. Check the ESA Correlation service log files to see which meta keys are missing: <code>/var/log/netwitness/correlation-server/correlation-server.log</code>.</p>
I created a rule with an enrichment, added an SMTP notification, and deployed my rule. We are not receiving SMTP notifications. Why?	You do not have a template that met the criteria to parse the events.	<p>Check the ESA Correlation service log files to see if the SMTP notification failed: <code>/var/log/netwitness/correlation-server/correlation-server.log</code>. For more details on the notification error, check the Integration-Server log file on the NetWitness Server (also known as Node 0, Admin server, or NWServer): <code>/var/log/netwitness/integration-server/integration-server.log</code>.</p> <p>If you use an ESA rule that has an enrichment, such as a Context Hub list, you must create a custom template. You can duplicate a default template and adjust it for your enrichment. See SMTP Notification Error Example below for a notification error example.</p> <p>For information on creating a custom ESA template, see "Define a Template for ESA Alert Notifications" in the <i>System Configuration Guide</i>.</p> <p>Go to the Master Table of Contents to find all NetWitness Platform Logs & Network 11.x documents.</p>

Problem	Possible Causes	Solutions
I created a custom rule (via the Rule Builder or Advanced EPL), and my rule is not firing. Why?	You may have connectivity issues.	<p>Check the Offered Rate statistic on the CONFIGURE>ESA Rules>Services tab. Select the ESA service and then look at the statistics on the tab for the Deployment.</p> <p>If the Offered Rate is zero, then the ESA service is not receiving data from Concentrators. Check the ESA Correlation log files for connectivity issues: <code>/var/log/netwitness/correlation-server/correlation-server.log</code>.</p> <p>If the offered rate is not zero, the meta key name and type used in the rule likely doesn't match the meta key present in events. Check to see if the meta key name and type used in the rule is valid by searching for the meta key name in CONFIGURE>ESA Rules>Settings tab (Meta Key References).</p>
I created a custom rule (via the Rule Builder or Advanced EPL), and my rule is not firing. Why?	There may be a problem with the rule.	<p>If a specific rule is not firing, go to CONFIGURE>ESA Rules>Services to see if the rule was disabled. In the Deployed Rule Stats section, a rule that is disabled displays a clear enabled button (instead of the green enabled button).</p> <p>You can also check Events Matched field.</p> <p>Go to CONFIGURE >ESA Rules> Services. From there, you can see the number of events that were matched in the Events Matched column.</p> <p>If no events matched, check the logic of your rule for errors. For example, check the syntax for uppercase and lowercase errors, and check the time window. If the rule still doesn't fire, consider simplifying the logic of the rule to see if it fires when there is less complexity.</p>
After a recent upgrade, I am not seeing alerts and I am seeing disabled rules.	There may be a problem with the ESA rule deployment.	<p>Deploy the ESA rule deployments again. ESA Rule Deployment Steps provides more information on deploying rules using the ESA Correlation service.</p> <p>If this does not resolve the issue, check the ESA Correlation log files for more information: <code>/var/log/netwitness/correlation-server/correlation-server.log</code>.</p>

SMTP Notification Error Example

The following SMTP notification error example is an excerpt from a `correlation-server.log` file, which shows an error message for sending notifications with unsupported templates. In this example, there is a rule that is configured with the GeoIP enrichment, which has a hash table as one of its fields (the GeoIPLookup meta). Because the default SMTP template is only designed to deal with metas that are either singular values or arrays that contain only singular values, such as `"ip.src": "1.1.1.1"` and `"action": ["fw:inbound-network-traffic"]`, sending the email notification fails due to the array containing a hash table.

FTL stack trace ("~" means nesting-related):

```
- Failed at: ${value!""} [in template "smtp.ftl" in macro "value_of" at line
1, column 152]
- Reached through: @value_of metadata[key] [in template "smtp.ftl" at line 85,
column 141]
```

...

For "\${...}" content: Expected a string or something automatically convertible to string (number, date or boolean), or "template output" , but this has evaluated to an extended_hash (LinkedHashMap wrapped into f.t.DefaultMapAdapter):

```
=> value!"" [in template "smtp.ftl" at line 1, column 154]
```

Steps to Troubleshoot Memory Issues with an ESA Service Offline

Step 1: Verify that your Host Is Running

The first step to troubleshooting is to ensure that your host is running. To do this, go to **ADMIN > Hosts**. If the host is down, the system parameters will not display (updating host information can sometimes be delayed), the **Services** display in red, and you may see an error message.

Name	Host	Services	Current Version	Update Version	Status
ESA	10.10.10.10	3	11.3.0.0	11.3.0.0	Up-to-Date
ESA	10.10.10.10	1	11.3.0.0	11.3.0.0	Up-to-Date
LH	10.10.10.10	3	11.3.0.0	11.3.0.0	Up-to-Date
NH	10.10.10.10	2	11.3.0.0	11.3.0.0	Up-to-Date
SA	10.10.10.10	12	11.3.0.0	11.3.0.0	Up-to-Date
SESA	10.10.10.10	2	11.3.0.0	11.3.0.0	Up-to-Date

If your host is down, contact your NetWitness Platform Administrator to restart it. Otherwise, go to Step 2.

Step 2: View Detailed Statistics in Health & Wellness

If your ESA service is down, you can go to Health & Wellness and view the **last known metrics** to see where potential issues are occurring. The most common problem is that your ESA service is exceeding memory thresholds, which causes it to stop or fail.

1. Go to **ADMIN > Health & Wellness > Alarms** to see if the ESA triggered any alarms. Look for the following alarms for ESA Correlation:
 - Correlation Server in Critical State
 - Correlation Server in Unhealthy State
 - Correlation Server Stopped

Time	State	Severity	Rule Name	Service	Hostname	IP Address	Stat
2018-11-01 06:10:18 PM	Active	Critical	Log Decoder Log Capture Pool Depleted	Log Decoder	LH	10.10.10.10	Pool/Package Capture Queue
2018-10-25 12:21:27 AM	Active	Critical	Decoder Capture Rate Zero	Decoder	NH	10.10.10.10	Capture/Capture Packet Rat
2018-10-25 12:20:37 AM	Active	Critical	Decoder Capture Not Started	Decoder	NH	10.10.10.10	Capture/Capture Status
2018-10-25 12:20:37 AM	Active	Critical	Decoder Packet Capture Pool Depleted	Decoder	NH	10.10.10.10	Pool/Package Capture Queue
2018-10-25 12:20:37 AM	Active	Critical	Concentrator Meta Rate Zero	Concentrator	NH	10.10.10.10	Concentrator/Meta Rate (cu
2018-10-25 12:20:37 AM	Active	Critical	Concentrator Aggregation Stopped	Concentrator	NH	10.10.10.10	Concentrator/Status
2018-10-25 12:17:48 AM	Active	Critical	Log Decoder Capture Rate Zero	Log Decoder	LH	10.10.10.10	Capture/Capture Packet Rat
2018-10-25 12:17:48 AM	Active	Critical	Log Decoder Capture Not Started	Log Decoder	LH	10.10.10.10	Capture/Capture Status
2018-10-25 12:17:48 AM	Active	Critical	Concentrator Meta Rate Zero	Concentrator	LH	10.10.10.10	Concentrator/Meta Rate (cu
2018-10-24 09:11:38 PM	Active	Critical	Broker Aggregation Stopped	Broker	SA	10.10.10.10	Broker/Status
2018-10-24 09:11:38 PM	Active	High	Broker Session Rate Zero	Broker	SA	10.10.10.10	Broker/Session Rate (curren
2018-11-02 05:53:28 PM	Cleared	Critical	Log Decoder Service in Bad State	Log Decoder	LH	10.10.10.10	ProcessInfo/Service State
2018-11-01 06:10:08 PM	Cleared	Critical	Concentrator Aggregation Stopped	Concentrator	LH	10.10.10.10	Concentrator/Status
2018-10-30 05:30:21 PM	Cleared	Critical	Correlation Server Stopped	ESA Correlation	ESA	10.10.10.10	ProcessInfo/Service Status
2018-10-24 09:06:41 PM	Cleared	Critical	Respond Server in Critical State	Respond Server	SA	10.10.10.10	ProcessInfo/Overall Process
2018-11-01 08:40:38 PM	Cleared	High	Concentrator Not Consuming From Service	Concentrator	LH	10.10.10.10	Status 10.10.10.10:50002

- Go to **ADMIN > Health & Wellness > System Stats Browser** to see the memory metrics for each rule's performance. To view the metrics, enter the following and click **Apply**:

Host

Component

Category

<your host>Correlation ServerCorrelation Engine Metrics

RSA

RESPOND

INVESTIGATE

MONITOR

CONFIGURE

ADMIN

Hosts

Services

Event Sources

Endpoint Sources

Health & Wellness

System

Security

Alarms

Monitoring

Policies

System Stats Browser

Event Source Monitoring

Settings

Host

Component

Category

Statistic

Order By

Any

Apply

Clear

Regex

Ascending

Descending

Host	Component	Category	Statistic	Subitem	Value	Last Update	Historical Graph
ESAI0333	Correlation Server	Correlation Engine Metrics	Live Rules - Module - Multiple Failed Logons from Same Source IP with Unique Usernames - StatementFired	0		2019-02-14 06:59:11 PM	
ESAI0333	Correlation Server	Correlation Engine Metrics	Live Rules - Module - Multiple Failed Privilege Escalations by Same User - Deployed	true		2019-02-14 06:59:11 PM	
ESAI0333	Correlation Server	Correlation Engine Metrics	Live Rules - Module - Multiple Failed Privilege Escalations by Same User - DisplayName	Multiple Failed Pr...		2019-02-14 06:59:11 PM	
ESAI0333	Correlation Server	Correlation Engine Metrics	Live Rules - Module - Multiple Failed Privilege Escalations by Same User - Enabled	true		2019-02-14 06:59:11 PM	
ESAI0333	Correlation Server	Correlation Engine Metrics	Live Rules - Module - Multiple Failed Privilege Escalations by Same User - LastTimeAlertFired	0		2019-02-14 06:59:11 PM	
ESAI0333	Correlation Server	Correlation Engine Metrics	Live Rules - Module - Multiple Failed Privilege Escalations by Same User - MemoryUsage	524		2019-02-14 06:59:11 PM	
ESAI0333	Correlation Server	Correlation Engine Metrics	Live Rules - Module - Multiple Failed Privilege Escalations by Same User - StatementFired	0		2019-02-14 06:59:11 PM	
ESAI0333	Correlation Server	Correlation Engine Metrics	Live Rules - Module - Multiple Intrusion Scan Events from Same User to Unique Destinations - Deployed	true		2019-02-14 06:59:11 PM	
ESAI0333	Correlation Server	Correlation Engine Metrics	Live Rules - Module - Multiple Intrusion Scan Events from Same User to Unique Destinations - DisplayName	Multiple Intrusio...		2019-02-14 06:59:11 PM	
ESAI0333	Correlation Server	Correlation Engine Metrics	Live Rules - Module - Multiple Intrusion Scan Events from Same User to Unique Destinations - Enabled	true		2019-02-14 06:59:11 PM	
ESAI0333	Correlation Server	Correlation Engine Metrics	Live Rules - Module - Multiple Intrusion Scan Events from Same User to Unique Destinations - LastTimeAlertFired	0		2019-02-14 06:59:11 PM	
ESAI0333	Correlation Server	Correlation Engine Metrics	Live Rules - Module - Multiple Intrusion Scan Events from Same User to Unique Destinations - MemoryUsage	88		2019-02-14 06:59:11 PM	
ESAI0333	Correlation Server	Correlation Engine Metrics	Live Rules - Module - Multiple Intrusion Scan Events from Same User to Unique Destinations - StatementFired	0		2019-02-14 06:59:11 PM	
ESAI0333	Correlation Server	Correlation Engine Metrics	Live Rules - Module - Multiple Login Failures Due to Username That Does Not Exist - Deployed	true		2019-02-14 06:59:11 PM	
ESAI0333	Correlation Server	Correlation Engine Metrics	Live Rules - Module - Multiple Login Failures Due to Username That Does Not Exist - DisplayName	Multiple Login Fai...		2019-02-14 06:59:11 PM	
ESAI0333	Correlation Server	Correlation Engine Metrics	Live Rules - Module - Multiple Login Failures Due to Username That Does Not Exist - Enabled	true		2019-02-14 06:59:11 PM	
ESAI0333	Correlation Server	Correlation Engine Metrics	Live Rules - Module - Multiple Login Failures Due to Username That Does Not Exist - LastTimeAlertFired	0		2019-02-14 06:59:11 PM	
ESAI0333	Correlation Server	Correlation Engine Metrics	Live Rules - Module - Multiple Login Failures Due to Username That Does Not Exist - MemoryUsage	176		2019-02-14 06:59:11 PM	
ESAI0333	Correlation Server	Correlation Engine Metrics	Live Rules - Module - Multiple Login Failures Due to Username That Does Not Exist - StatementFired	0		2019-02-14 06:59:11 PM	
ESAI0333	Correlation Server	Correlation Engine Metrics	Live Rules - Module - Multiple Login Failures by Administrators to Domain Controller - Deployed	true		2019-02-14 06:59:11 PM	
ESAI0333	Correlation Server	Correlation Engine Metrics	Live Rules - Module - Multiple Login Failures by Administrators to Domain Controller - DisplayName	Multiple Login Fai...		2019-02-14 06:59:11 PM	

<<

<

Page 6

|

of 14


>>

>

11-3-30

Items 251 - 300 of 976

The name of the rule is in the **Statistic** column and the memory usage in bytes is in the **Value** column.

- Click  to view a historical view of memory usage for the rule in the **Historical Graph** column.

Select your host, and use the following filters to view the following statistics:


Host	Component	Category	Statistic	Example
<your host>	Host	SystemInfo	CPU Utilization	1.14%
<your host>	Host	SystemInfo	Memory Utilization	30.64%
<your host>	Host	SystemInfo	Used Memory	15.05 GB
<your host>	Host	SystemInfo	Total Memory	49.14 GB
<your host>	Host	SystemInfo	Uptime	259493, 3 days 16 minutes 53 seconds
<your host>	Correlation Server	Process jvm	Memory Total Max	64.00 GB
<your host>	Correlation Server	Process jvm	Memory Total Used	593.70 MB
<your host>	Correlation Server	ProcessInfo	CPU Utilization	0.4%
<your host>	Correlation Server	ProcessInfo	Maximum Memory	62.92 GB
<your host>	Correlation Server	ProcessInfo	Memory Utilization	1.48 GB

The following figure shows the location of the ESA Correlation service CPU and Memory Utilization statistics.


Host	Component	Category	Statistic	Subitem	Value	Last Update	Historical
ESA	Correlation Server	Health Checks	Process.Modules.Module-Health		Healthy	2018-11-02 06:12:01 P...	
ESA	Correlation Server	Health Checks	Security.Pki.Certificate-Health		Healthy	2018-11-02 06:12:01 P...	
ESA	Correlation Server	Health Checks	Transport.Bus.Subscription.Config-Server-Notifications		Healthy	2018-11-02 06:12:01 P...	
ESA	Correlation Server	Health Checks	Transport.Bus.Subscription.Contexthub-Datasource-Config-Updates		Healthy	2018-11-02 06:12:01 P...	
ESA	Correlation Server	Health Checks	Transport.Bus.Subscription.Contexthub-Datasource-Updates		Healthy	2018-11-02 06:12:01 P...	
ESA	Correlation Server	Health Checks	Transport.Bus.Subscription.Security-Server-Announcements-Roles		Healthy	2018-11-02 06:12:01 P...	
ESA	Correlation Server	Process	Mode		Normal	2018-10-29 03:04:50 P...	
ESA	Correlation Server	Process	Status		Running	2018-10-29 03:04:50 P...	
ESA	Correlation Server	Process Jvm	Memory Total Max		64.00 GB	2018-10-29 03:04:50 P...	
ESA	Correlation Server	Process Jvm	Memory Total Used		593.70 MB	2018-10-29 03:04:50 P...	
ESA	Correlation Server	ProcessInfo	Build Date		2018-Oct-31 18:07:07	2018-11-02 06:11:41 P...	
ESA	Correlation Server	ProcessInfo	CPU Utilization		0.4%	2018-11-02 06:12:11 P...	
ESA	Correlation Server	ProcessInfo	Maximum Memory		62.92 GB	2018-11-02 06:12:11 P...	
ESA	Correlation Server	ProcessInfo	Memory Utilization		1.48 GB	2018-11-02 06:12:11 P...	
ESA	Correlation Server	ProcessInfo	Overall Processing Status Indicator		WORKING	2018-11-02 06:12:11 P...	
ESA	Correlation Server	ProcessInfo	Overall Service Status Indicator		WORKING	2018-11-02 06:12:11 P...	
ESA	Correlation Server	ProcessInfo	Running Since		2018-Oct-31 18:12:08	2018-11-02 06:12:11 P...	
ESA	Correlation Server	ProcessInfo	Service Status		started	2018-11-02 06:12:11 P...	
ESA	Correlation Server	ProcessInfo	Service Version		11.3.0.0	2018-11-02 06:11:41 P...	
ESA	Correlation Server	ProcessInfo	Uptime		172803, 2 days 3 seco...	2018-11-02 06:12:11 P...	

- Click  to view a historical view of CPU and memory utilization.

The following figure shows the historical graph of CPU utilization.

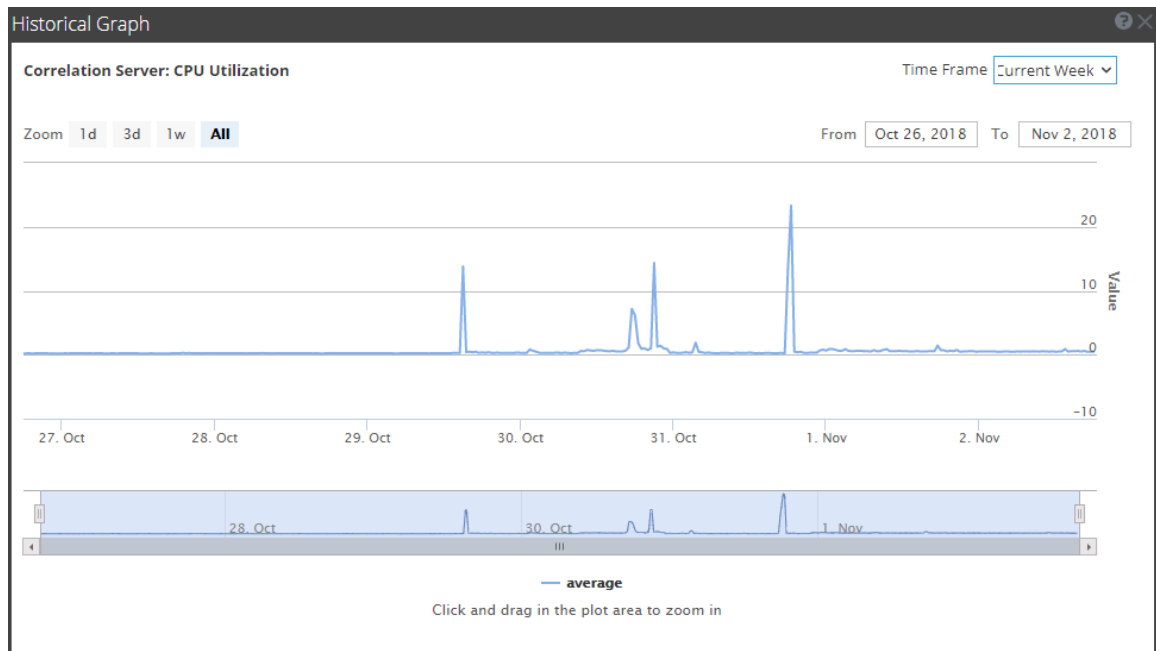

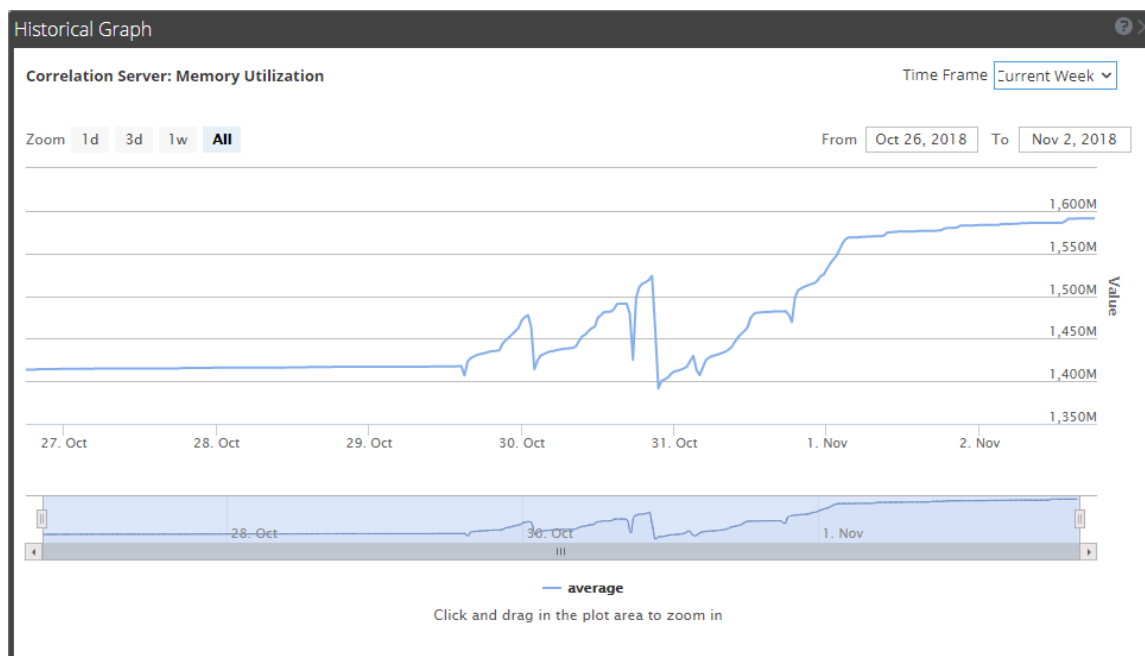

The following figure shows the historical graph of **Memory Utilization**.



If you are having a problem with memory or CPU utilization, continue to step 3.

Step 3: Bring up your ESA Services

1. Go to **ADMIN > Services**, select your ESA service, and then select   > **Start**.
2. Return to the ESA Service to troubleshoot which rules have created memory issues.

If your ESA service is stopping and restarting in a loop, you may need to call Customer Support to get the services to start.

If you are able to start your ESA service without a shutdown, continue to step 4.

Step 4: Check the Alerts and Events Volume

After you are able to restart your ESA service without an immediate shutdown, you can review the stats for your rules to see which rules are consuming too many resources. Sometimes, ESA services fail because a rule is generating too many alerts or a rule is matching too many events. Check for both of these issues if you have determined that memory usage is causing your ESA service to shut down.

View Alert Summaries

Rules that generate a high volume of alerts can overwhelm the system and cause it to fail or restart. To view the alert summaries, go to **RESPOND > Alerts**. In the **Filters** panel on the left, in the **ALERT NAMES** section, select the alert name for the rule. The number of alerts with that name appears at the bottom of the Alerts list results. If the number is significantly high for a particular rule, you need to disable the rule and rewrite it to be more efficient.

The screenshot shows the RSA NetWitness Platform interface. The top navigation bar includes tabs for RESPOND, INVESTIGATE, MONITOR, CONFIGURE, and ADMIN. The 'Alerts' tab is active. On the left, a filter sidebar shows 'PART OF INCIDENT' (Yes/No) and 'ALERT NAMES' with a list of rules. The rule 'Direct Login To an Administrative Account' is selected. The main table displays a list of alerts with columns: CREATED, SEVERITY, NAME, SOURCE, # EVENT..., HOST SUMMARY, and INCIDENT ID. The table shows 12 items, all with severity 50 and source 'Event Stream Analysis'. The bottom status bar indicates 'Showing 12 out of 12 Items' and '0 selected'.

To clear your filter, click **Reset Filters**.

View Events Matched

Sometimes a rule matches too many events, which can use up excessive memory. This typically occurs if you create a large event window where a great number of events accumulate without triggering an alert. This is a problem because each event is stored in memory while the rule waits for the alert to trigger. To check for this issue, go to **CONFIGURE > ESA Rules > Services**. From there, you can see the number of events that were matched in the **Events Matched** column for the deployment. If a high number of events were matched for a given rule, you can investigate the rule further to see if you can make it more efficient.

The screenshot shows the RSA NetWitness Platform interface. The top navigation bar includes tabs for RESPOND, INVESTIGATE, MONITOR, CONFIGURE, and ADMIN. The 'CONFIGURE' tab is active, and the 'Services' sub-tab is selected. The 'SESAs - ESA Correlation' section displays engine stats, rule stats, and alert stats. The 'Deployed Rule Stats' table shows a list of rules with their status, name, rule type, trial rule, last detected, events matched, and memory usage.

Enable	Name	Rule Type	Trial Rule	Last Detected	Events Matched	Memory Usage
<input type="checkbox"/>	SAMPLE - Blacklist - From inside countries that are not the US, Non SMT...	Esper	Yes		0	0 bytes
<input type="checkbox"/>	SAMPLE - Non SMTP Traffic on TCP Port 25 Containing Executable	Esper	Yes		0	0 bytes
<input type="checkbox"/>	SAMPLE - P2P Software as Detected by an Intrusion Detection Device	Esper	Yes		0	0 bytes
<input type="checkbox"/>	SAMPLE - User Added to Admin Group Same User su sudo	Esper	Yes		0	248 bytes


Step 5: Disable and Repair the Rule that Caused Issues

Once you have determined the rules that need to be rewritten, disable them and rewrite rules so that they don't generate such a high volume of alerts or events. For pointers on how to write more efficient rules, see [Best Practices](#).

Disable Rules

1. To disable rules, go to **CONFIGURE > ESA Rules > Services**, and select the rules you want to disable in the **Deployed Rules Stats** field.
2. Select **Disable** to disable the rules.

Edit Rules

1. To repair the rules, go to **CONFIGURE > ESA Rules > Rules tab > Rule Library**.
2. For each rule that you repair, do the following:
 - a. Select the rule to edit and then select  > **Edit**.
 - b. Edit the rule to be more efficient. For instructions on creating rules, see [Add Rules to the Rule Library](#)
 - c. When you are satisfied with your rule, you can save the rule as a trial rule to ensure that any memory issues do not affect ESA services performance. To do this, follow the steps listed in [Work with Trial Rules](#).

Deploy Rules

1. Go to **CONFIGURE > ESA Rules > Rules** tab.
2. In the options panel on the left, select the deployment that contains the rule.
3. In the Deployment view, the rule that you changed shows a status of Updated. Click **Deploy Now**. The rule status changes to Deployed.

Verify that the Rules are Enabled

After you deploy the ESA rules, they should automatically show as enabled. If not, you can enable the rules.

1. Go to **CONFIGURE > ESA Rules > Services** tab, and select the ESA service in the options panel.
2. On the deployment tab for the deployment that contains the rules, in the Deployed Rule Stats section, look at the status of the rules in the Enable column. Enabled rules show a green circle. If the rules show a white circle, you can enable the rules.
3. To enable rules, select the rules you want to enable and select **Enable** above the table.

(Optional) Check the ESA Correlation Log Files for More Information

Once you verify that your services are down and some potential causes for the system going down, check to see if the service is stopping and restarting in a loop. To do this, go to the ESA Correlation logs. You can use SSH to get in the system and go to: `/var/log/netwitness/correlation-server/correlation-server.log`.

View Memory Metrics for Rules

This topic tells ESA rule writers how to view memory metrics for an ESA Correlation service and its associated ESA rules. You can see estimated memory usage for each rule running on a server, and you can use this information to modify your rule statements and conditions if they use too much memory.

Rules can sometimes consume more memory than you expect, causing ESA to slow down or stop. To see approximately how much memory a rule is using, you can view estimated memory usage for each rule in the Health & Wellness System Stats browser (you need permissions to access this module). You can use this information to modify your rules to be more efficient.

At a high level, you need to complete the following steps to use memory metrics to troubleshoot memory usage for rules:

1. Ensure you have the correct permissions to view the Health & Wellness module. For information on roles and permissions, see [Role Permissions](#).
2. View the memory statistics in Health & Wellness.
3. (Recommended) Configure Health & Wellness ESA policies to send an email if memory thresholds are exceeded. See "Manage Policies" in the *System Maintenance Guide* for instructions on sending email notifications.
4. Use the memory metrics data to modify rules to be more efficient, if necessary.

Note: You can also view memory metrics for ESA rules in the **CONFIGURE > ESA Rules > Services** tab. See [View Stats for an ESA Service](#).

Prerequisites

The following are requirements for using memory metrics:

- You must have the appropriate permissions to view Health & Wellness statistics.
- (Recommended) Configure the ESA Health & Wellness policy to send an email when memory thresholds are exceeded.

Note: Memory Metrics is always on for the ESA Correlation service; you do not have to enable it.

View Memory Metrics for an ESA Correlation Service in Health & Wellness

1. Go to **ADMIN > Health & Wellness > Monitoring** tab.

The screenshot shows the RSA NetWitness Platform Admin console. The 'Monitoring' tab is selected. Under the 'Hosts' section, the 'ESA10333' host is expanded. The following table shows the services running on this host:

Service	Health Status	Rate	Name	Service Type	CPU	Memory Usage	Uptime
Ready	●	--	ESA10333 - Contexthub Server	Contexthub Server	0.2%	1.22 GB	6 days 3 hours 31 minutes 15 seconds
Ready	●	--	ESA10333 - Event Stream Analytics Server	Entity Behavior Analytics	0.4%	1.02 GB	6 days 3 hours 31 minutes 3 seconds
Ready	●	--	ESA10333 - ESA Correlation	ESA Correlation	0.3%	1.48 GB	6 days 3 hours 33 minutes 13 seconds

2. Locate your host and click the link in the **Name** field for your ESA Correlation service, for example, ESAXxxxx - ESA Correlation.

This is a close-up of the 'ESA10333 - ESA Correlation' service entry from the previous screenshot. The 'Name' field, 'ESA10333 - ESA Correlation', is highlighted with a red box.

3. On the tab for your ESA host, click the **Health Stats** tab. You can view the health status of the ESA Correlation service.

The screenshot shows the 'Health Stats' tab for the 'ESA10333 - ESA Correlation' service. The 'Health Stats' section displays the following information:

Service	CPU	Running Since	Build Date	Used Memory	Max Process Memory	Version Information
ESA10333 - ESA Correlation	0.3%	2019-Feb-12 16:09:57	2019-Feb-11 22:51:37	1.48 GB	62.92 GB	11.3.0.0

Below the table, the 'Health Stats' section shows the status of various components:

Configuration Update Status	Process JVM Memory	Data Connection	Process Modules	Security PKI Certificate
Healthy	Healthy	Healthy	Healthy	Healthy

4. Click the **JVM** tab.

You can view the JVM total memory used by the selected ESA Correlation service.

The screenshot shows the RSA NetWitness Platform Admin console. The top navigation bar includes tabs for RESPOND, INVESTIGATE, MONITOR, CONFIGURE, and ADMIN. The ADMIN tab is active, and the left sidebar shows the navigation menu with options like Hosts, Services, Event Sources, Endpoint Sources, Health & Wellness, System, and Security. The main content area displays the 'ESA10333 - ESA Correlation Details' page. The 'Service' tab is selected, showing details for the selected service. The 'Health Stats' tab is also visible, and the 'JVM' sub-tab is selected, displaying the JVM total memory used.

Service			
CPU	0.4%	Used Memory	1.48 GB
Running Since	2019-Feb-12 16:09:57	Max Process Memory	62.92 GB
Build Date	2019-Feb-11 22:51:37	Version Information	11.3.0.0

Health Stats			
JVM			
JVM Total Memory Max	64.00 GB	JVM Total Memory Used	596.50 MB

Note: You can also view memory metrics for the ESA Correlation service in the **CONFIGURE > ESA Rules > Services** tab. See [View Stats for an ESA Service](#).

View Memory Metrics for an ESA Correlation Service and its ESA Rules


1. Go to **ADMIN > Health & Wellness > System Stats Browser**.
2. To view memory metrics for an ESA Correlation service, in the **Host** field, select your ESA host. Select **Correlation Server** for **Component**, enter **ProcessInfo** for **Category**, and then click **Apply**.

Host	Component	Category
<your host>	Correlation Server	ProcessInfo

RSA RESPOND INVESTIGATE MONITOR CONFIGURE ADMIN									
Hosts Services Event Sources Endpoint Sources Health & Wellness System Security									
Alarms Monitoring Policies System Stats Browser Event Source Monitoring Settings									
Host	Component	Category	Statistic	Order By					
ESA10333	Correlation Server	ProcessInfo	Any	Apply Clear					
		<input type="checkbox"/> Regex	<input type="checkbox"/> Regex	Ascending Descending					
Host	Component	Category	Statistic	Subitem	Value	Last Update	Historical Graph		
ESA10333	Correlation Server	ProcessInfo	Build Date		2019-Feb-11 22:51:37	2019-02-18 08:07:20 PM			
ESA10333	Correlation Server	ProcessInfo	CPU Utilization		0.3%	2019-02-18 08:07:40 PM			
ESA10333	Correlation Server	ProcessInfo	Maximum Memory		62.92 GB	2019-02-18 08:07:40 PM			
ESA10333	Correlation Server	ProcessInfo	Memory Utilization		1.48 GB	2019-02-18 08:07:40 PM			
ESA10333	Correlation Server	ProcessInfo	Overall Processing Status Indicator		WORKING	2019-02-18 08:07:40 PM			
ESA10333	Correlation Server	ProcessInfo	Overall Service Status Indicator		WORKING	2019-02-18 08:07:40 PM			
ESA10333	Correlation Server	ProcessInfo	Running Since		2019-Feb-12 16:09:57	2019-02-18 08:07:40 PM			
ESA10333	Correlation Server	ProcessInfo	Service Status		started	2019-02-18 08:07:40 PM			
ESA10333	Correlation Server	ProcessInfo	Service Version		11.3.0.0	2019-02-18 08:07:20 PM			
ESA10333	Correlation Server	ProcessInfo	Uptime		532663, 6 days 3 hour...	2019-02-18 08:07:40 PM			

The **Memory Utilization** statistic shows the total memory in use by the ESA Correlation service.

- To view the historical memory usage for the ESA Correlation service, click the **Historical Graph** icon.

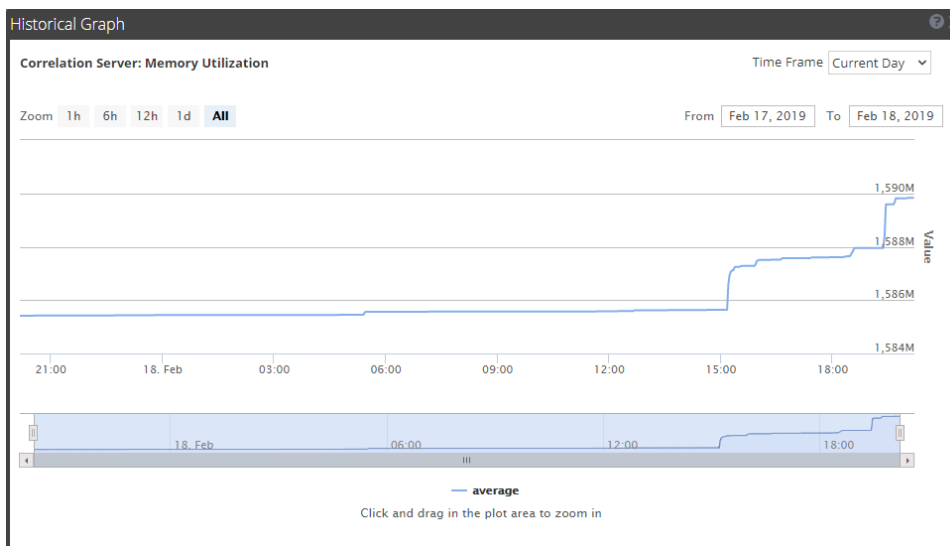

- To view the memory metrics for individual rules, in the **Category** field, enter **Correlation Engine Metrics** and click **Apply**.

Host	Component	Category
<your host>	Correlation Server	Correlation Engine Metrics

RSA

RESPOND

INVESTIGATE

MONITOR

CONFIGURE

ADMIN

Hosts

Services

Event Sources

Endpoint Sources

Health & Wellness

System

Security

Alarms

Monitoring

Policies

System Stats Browser

Event Source Monitoring

Settings

Host

Component

Category

Statistic

Order By

ESA10333

Correlation Server

Correlation Engine Metrics

Any

Ascending

Descending

Apply

Clear

Regex

Regex

Host	Component	Category	Statistic	Subitem	Value	Last Update	Historical Graph
ESA10333	Correlation Server	Correlation Engine Metrics	Live Rules - Module - Multiple Failed Logons from Same Source IP with Unique Usernames - StatementFired	0	2019-02-14 06:59:11 PM		
ESA10333	Correlation Server	Correlation Engine Metrics	Live Rules - Module - Multiple Failed Privilege Escalations by Same User - Deployed	true	2019-02-14 06:59:11 PM		
ESA10333	Correlation Server	Correlation Engine Metrics	Live Rules - Module - Multiple Failed Privilege Escalations by Same User - DisplayName	Multiple Failed Pr...	2019-02-14 06:59:11 PM		
ESA10333	Correlation Server	Correlation Engine Metrics	Live Rules - Module - Multiple Failed Privilege Escalations by Same User - Enabled	true	2019-02-14 06:59:11 PM		
ESA10333	Correlation Server	Correlation Engine Metrics	Live Rules - Module - Multiple Failed Privilege Escalations by Same User - LastTimeAlertFired	0	2019-02-14 06:59:11 PM		
ESA10333	Correlation Server	Correlation Engine Metrics	Live Rules - Module - Multiple Failed Privilege Escalations by Same User - MemoryUsage	555	2019-02-14 06:59:11 PM		
ESA10333	Correlation Server	Correlation Engine Metrics	Live Rules - Module - Multiple Failed Privilege Escalations by Same User - StatementFired	0	2019-02-14 06:59:11 PM		
ESA10333	Correlation Server	Correlation Engine Metrics	Live Rules - Module - Multiple Intrusion Scan Events from Same User to Unique Destinations - Deployed	true	2019-02-14 06:59:11 PM		
ESA10333	Correlation Server	Correlation Engine Metrics	Live Rules - Module - Multiple Intrusion Scan Events from Same User to Unique Destinations - DisplayName	Multiple Intrusio...	2019-02-14 06:59:11 PM		
ESA10333	Correlation Server	Correlation Engine Metrics	Live Rules - Module - Multiple Intrusion Scan Events from Same User to Unique Destinations - Enabled	true	2019-02-14 06:59:11 PM		
ESA10333	Correlation Server	Correlation Engine Metrics	Live Rules - Module - Multiple Intrusion Scan Events from Same User to Unique Destinations - LastTimeAlertFired	0	2019-02-14 06:59:11 PM		
ESA10333	Correlation Server	Correlation Engine Metrics	Live Rules - Module - Multiple Intrusion Scan Events from Same User to Unique Destinations - MemoryUsage	88	2019-02-14 06:59:11 PM		
ESA10333	Correlation Server	Correlation Engine Metrics	Live Rules - Module - Multiple Intrusion Scan Events from Same User to Unique Destinations - StatementFired	0	2019-02-14 06:59:11 PM		
ESA10333	Correlation Server	Correlation Engine Metrics	Live Rules - Module - Multiple Login Failures Due to Username That Does Not Exist - Deployed	true	2019-02-14 06:59:11 PM		
ESA10333	Correlation Server	Correlation Engine Metrics	Live Rules - Module - Multiple Login Failures Due to Username That Does Not Exist - DisplayName	Multiple Login Fai...	2019-02-14 06:59:11 PM		
ESA10333	Correlation Server	Correlation Engine Metrics	Live Rules - Module - Multiple Login Failures Due to Username That Does Not Exist - Enabled	true	2019-02-14 06:59:11 PM		
ESA10333	Correlation Server	Correlation Engine Metrics	Live Rules - Module - Multiple Login Failures Due to Username That Does Not Exist - LastTimeAlertFired	0	2019-02-14 06:59:11 PM		
ESA10333	Correlation Server	Correlation Engine Metrics	Live Rules - Module - Multiple Login Failures Due to Username That Does Not Exist - MemoryUsage	176	2019-02-14 06:59:11 PM		
ESA10333	Correlation Server	Correlation Engine Metrics	Live Rules - Module - Multiple Login Failures Due to Username That Does Not Exist - StatementFired	0	2019-02-14 06:59:11 PM		
ESA10333	Correlation Server	Correlation Engine Metrics	Live Rules - Module - Multiple Login Failures by Administrators to Domain Controller - Deployed	true	2019-02-14 06:59:11 PM		
ESA10333	Correlation Server	Correlation Engine Metrics	Live Rules - Module - Multiple Login Failures by Administrators to Domain Controller - DisplayName	Multiple Login Fai...	2019-02-14 06:59:11 PM		

«

<

Page

6

of

14

>

»

1

2


Items 251 - 300 of 676


STATISTICS

11.3.30

The name of the rule is in the **Statistic** column appended with **MemoryUsage** and the memory usage in bytes is in the **Value** column.

Note: The **Last Update** field reflects when Health & Wellness polls ESA. However, the Memory Metrics is not synchronized with the Health & Wellness polling. For example, if the memory threshold is exceeded on 2/10/19 at 12 p.m., but Health & Wellness polls at 2/10/19 at 12:10 p.m., the **Last Update** field will display a timestamp of 2/10/19 12:10 p.m.

- Click  to view a historical view of memory usage for the rule in the **Historical Graph** column.

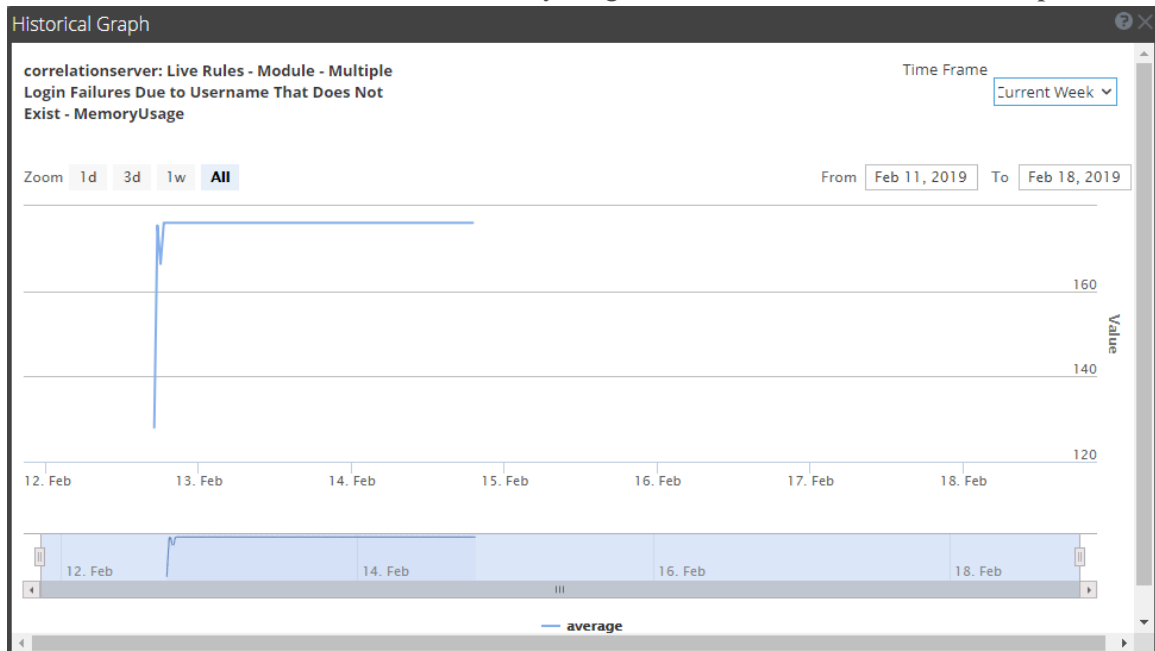

Note: You can also view memory metrics for ESA rules in the **CONFIGURE > ESA Rules > Services** tab. See [View Stats for an ESA Service](#).

How ESA Handles Sensitive Data

This topic explains how ESA treats sensitive data, such as usernames or IP address, that it receives from Core services. The Data Privacy Officer (DPO) role can identify meta keys that contain sensitive data and should display obfuscated data. ESA does not display or store sensitive meta. Consequently, ESA will not pass sensitive data to NetWitness Respond.

Optionally, ESA can add an obfuscated version of the sensitive data to an event. For example, the DPO identifies `user_dst` as sensitive. ESA can add an obfuscated version, such as `user_dst_hash`, to an event. The obfuscated meta is not sensitive, so ESA will display and store it the same way as any other non-sensitive meta.

For more information on the strategy and benefits of obfuscating data, see the *Data Privacy Management Guide*.

This topic explains the following:

- How ESA treats sensitive data it receives from Core services
- How to prevent sensitive data leaks in an Advanced EPL rule

How ESA Treats Sensitive Data from Core Services

When ESA receives sensitive data from Core services, ESA passes on only the obfuscated version of the data. ESA does not store or show sensitive data.

The following features are impacted:

- Outputs – ESA does not forward sensitive data to outputs, which include alerts, notifications, and MongoDB storage.
- Advanced EPL rules – If an EPL statement creates an alias for a sensitive meta key, sensitive data will leak. This topic illustrates how this happens so you can avoid it.
- Enrichments – If a sensitive meta key is used in the join condition, sensitive data will leak. This topic illustrates how this happens so you can avoid it.

Advanced EPL Rule

If an EPL query statement renames a sensitive meta key, the data will not be protected.

ESA identifies a sensitive meta key by the name:

- `ip_src` is the sensitive meta key.
- `ip_src_hash` is the non-sensitive, obfuscated version.

To support data privacy, the sensitive meta key must not be renamed in an EPL query. If a sensitive meta key is renamed, the data will no longer be protected.

For example, in a rule such as `select ip_src as ip_alias...`, `ip_alias` contains the sensitive data but it is not protected because ESA only knows about `ip_src`, not `ip_alias`. In this case, IP addresses would not be obfuscated. Real values would be displayed.

Enrichment Source

When a sensitive meta key is used in a join condition, sensitive data can be displayed.

The enrichment database, which is the other part of the join condition, has one column that matches the sensitive meta key. This cross reference is to actual values not obscured values. Consequently, actual values are displayed.

In the following example, both parts of the join condition are highlighted.

Enrichments + -

	Type	Enrichment Source	ESA Event Stream Meta	Enrichment Source Column Name
<input type="checkbox"/>	GeolP	Default GeolP	ip_src	ipv4

- `ip_src` contains sensitive data.
- `ipv4` will be added to the alert and exposed as non-sensitive data.

Because the `ipv4` value is the same as the `ip_src` value, `ipv4` contains and displays sensitive data.

ESA Rule Types

This topic describes each type of ESA rule, when to use them and the permissions each role has with them. The following table lists each type, describes it, and explains when to use it.

Rule Type	Description	When to Use
RSA Live ESA	RSA Live has a catalog of ESA rules that you can download and modify to run in your network.	Download RSA Live ESA rules to leverage rules that are already built. Modify the configurable parameters to customize to meet your requirements.
Rule Builder	In the rule builder, you define rule criteria in an easy-to-use interface.	Use the rule builder to create your first rules. You choose many of the rule conditions from lists.
Advanced EPL	With the Event Processing Language (EPL), you define rule criteria by writing a query.	Use advanced EPL rules to define rule criteria in the EPL syntax.
Endpoint Rule Bundle	An Endpoint Risk Scoring Rules Bundle, which contains approximately 400 rules, comes with NetWitness Platform 11.3 and later. The rules in this bundle only apply to NetWitness Endpoint.	If you have NetWitness Endpoint, you can configure risk scoring to identify suspicious files and hosts. To turn on risk scoring for NetWitness Endpoint, you must deploy endpoint risk scoring rules on ESA. For instructions, see "Deploy Endpoint Risk Scoring Rules on ESA" in the <i>ESA Configuration Guide</i> . For complete information on configuring NetWitness Endpoint, see the <i>NetWitness Endpoint Configuration Guide</i> .

Starter Pack Rules

Sample Rule Builder rules come with NetWitness Platform and appear in the Rule Library. Use starter pack rules to get comfortable working with rules before creating your own. You can safely edit and deploy these sample rules.

Endpoint Risk Scoring Rules Bundle

An Endpoint Risk Scoring Rules Bundle, which contains approximately 400 rules, comes with NetWitness Platform 11.3 and later. These rules appear in the Rule Library with the sample rules. Endpoint risk scoring rules only apply to NetWitness Endpoint. You can add the Endpoint Risk Scoring Rules Bundle to an ESA rule deployment in the same way that you would add any ESA rule. However, you must specify endpoint data sources (Concentrators) in the ESA Rule Deployment.

Trial Rules Mode

For any type of rule, you can select the Trial Rule setting as an additional safeguard. Trial rules get disabled if they exceed a memory threshold set by the administrator. Run a rule in trial mode to monitor memory usage and to disable the rule automatically if it uses more memory than the threshold allows.

The following figure shows the Trial Rule setting in the Rule Builder.

The screenshot shows the RSA NetWitness Platform Rule Builder interface. The 'Trial Rule' checkbox is checked and highlighted with a red box. The rule name is 'SAMPLE - Whitelist - From outside of Germany, P2P Software as Detected by an Intrusion Detection Device'. The description states: 'Whitelist Germany from P2P software as detected by an intrusion detection device (IDS), intrusion prevention device (IPS), firewall or vulnerability scanner. This is the same as the rule "SAMPLE - P2P Software as Detected by an Intrusion Detection Device" with the addition of a separate whitelist condition which ignores attempts when the source IP appears to be from Germany.'

Rule Builder
Build a rule using drag-and-drop and auto-complete tools.

Rule Name *

Description

Trial Rule ☒

Alert ☒

Severity *

Conditions * [Investigation](#)

Statement	Occurs	Connector	Correlation Type	Meta	Meta
<input type="checkbox"/> Intrusion Log Message	1	AND			
<input type="checkbox"/> P2P Detection	1	AND			
<input type="checkbox"/> Whitelist Germany	1				

Group By

Occurs Within minutes

Notifications [Global Notifications](#)

Output	Notification	Notification Server	Template
No parameters to edit.			

☐ Output Suppression of every minutes

RSA NETWITNESS PLATFORM 11.3.0.0

Role Permissions

This topic lists all ESA permissions and shows which permissions are assigned to each pre-configured NetWitness Platform role. User access is restricted based on roles and permissions assigned to roles.

- Administrators
- Operators
- Analyst
- Security Operations Center (SOC) Managers
- Malware Analysts (MA)
- Data Privacy Officer

There are four permissions for ESA:

- **Access Alerting Module:** Is required for any permission
- **View Rules:** Allows view-only permission for rules in the Rule Library
- **View Alerts:** Allows view-only permission for alerts ESA generates
- **Manage Rules:** Allows you to view, create, edit, and delete rules

The following table lists permissions for ESA and the roles to which they are assigned. Use this table to see how each role can work with rules and alerts.


Permission	Administrators	Operators	Analysts	SOC Mgrs	MA's	DPOs
Access Alerting Module	Yes	Yes	Yes	Yes		Yes
View Rules	Yes	Yes		Yes		Yes
View Alerts	Yes		Yes	Yes		Yes
Manage Rules	Yes	Yes		Yes		Yes

For more information on roles and permissions, see the *System Security and User Management Guide*.

Practice with Starter Pack Rules

NetWitness Platform comes with starter pack rules so analysts can become familiar with how rules look before they create their own rules. Use the starter pack rules to become familiar with the Rule Builder and to practice editing and deploying a rule.

Starter pack rules are installed in the Rule Library, which contains every rule you download or create. The following figure shows sample rules in the Rule Library.

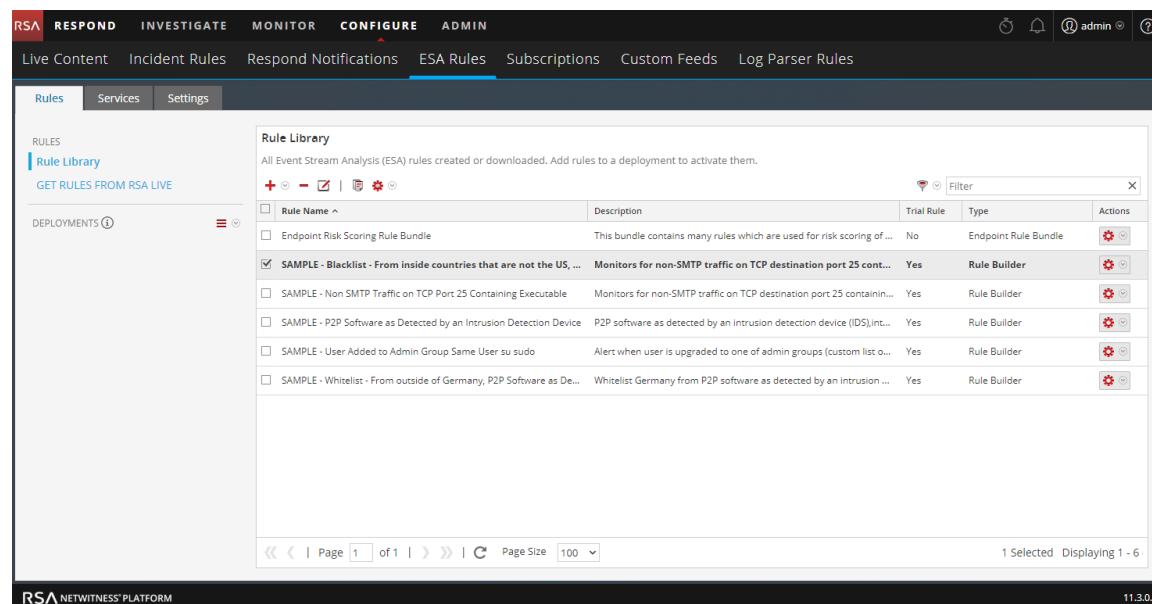

These are the available starter pack rules:

- SAMPLE - Blacklist - From inside countries that are not the US, Non SMTP Traffic on TCP Port 25 Containing Executable
- SAMPLE - Non SMTP Traffic on TCP Port 25 Containing Executable
- SAMPLE - P2P Software as Detected by an Intrusion Detection Device
- SAMPLE - User Added to Admin Group Same User su Sudo
- SAMPLE - Whitelist - From outside of Germany, P2P Software as Detected by an Intrusion Detection Device.

Each name begins with SAMPLE to distinguish the rules that are installed with NetWitness Platform from the rules you download and create.

Rule Library

The Rule Library shows the following information for a rule:


- **Name** summarizes the data or events the rule collects.
- **Description** explains the rule in more detail, although only the beginning shows in the Rule Library.
- **Trial Rule** indicates if trial mode is enabled or disabled for the rule.
- **Type** shows the origin of the rule, built in Rule Builder or Advanced EPL, downloaded from RSA Live, or Endpoint Rule Bundle.


The screenshot displays the RSA NetWitness Platform interface, specifically the Rule Library section under the CONFIGURE tab. The interface shows a table of rules with the following columns: Rule Name, Description, Trial Rule, Type, and Actions. The rule 'SAMPLE - Blacklist - From inside countries that are not the US, ...' is selected, and its description is 'Monitors for non-SMTP traffic on TCP destination port 25 containing...'. The interface also includes a sidebar with 'Rules', 'Services', and 'Settings' tabs, and a top navigation bar with 'RESPOND', 'INVESTIGATE', 'MONITOR', 'CONFIGURE', and 'ADMIN' tabs.

Rule Name	Description	Trial Rule	Type	Actions
Endpoint Risk Scoring Rule Bundle	This bundle contains many rules which are used for risk scoring of ...	No	Endpoint Rule Bundle	
<input checked="" type="checkbox"/> SAMPLE - Blacklist - From inside countries that are not the US, ...	Monitors for non-SMTP traffic on TCP destination port 25 containing...	Yes	Rule Builder	
<input type="checkbox"/> SAMPLE - Non SMTP Traffic on TCP Port 25 Containing Executable	Monitors for non-SMTP traffic on TCP destination port 25 containin...	Yes	Rule Builder	
<input type="checkbox"/> SAMPLE - P2P Software as Detected by an Intrusion Detection Device	P2P software as detected by an intrusion detection device (IDS),int...	Yes	Rule Builder	
<input type="checkbox"/> SAMPLE - User Added to Admin Group Same User su sudo	Alert when user is upgraded to one of admin groups (custom list o...	Yes	Rule Builder	
<input type="checkbox"/> SAMPLE - Whitelist - From outside of Germany, P2P Software as De...	Whitelist Germany from P2P software as detected by an intrusion ...	Yes	Rule Builder	

Practice with Starter Pack Sample Rules

1. Go to **CONFIGURE > ESA Rules**.
The ESA Rules view is displayed with the Rules tab open.

2. In the **Rule Library**, double-click a sample rule or select a sample rule and click . The rule is opened in Rule Builder.

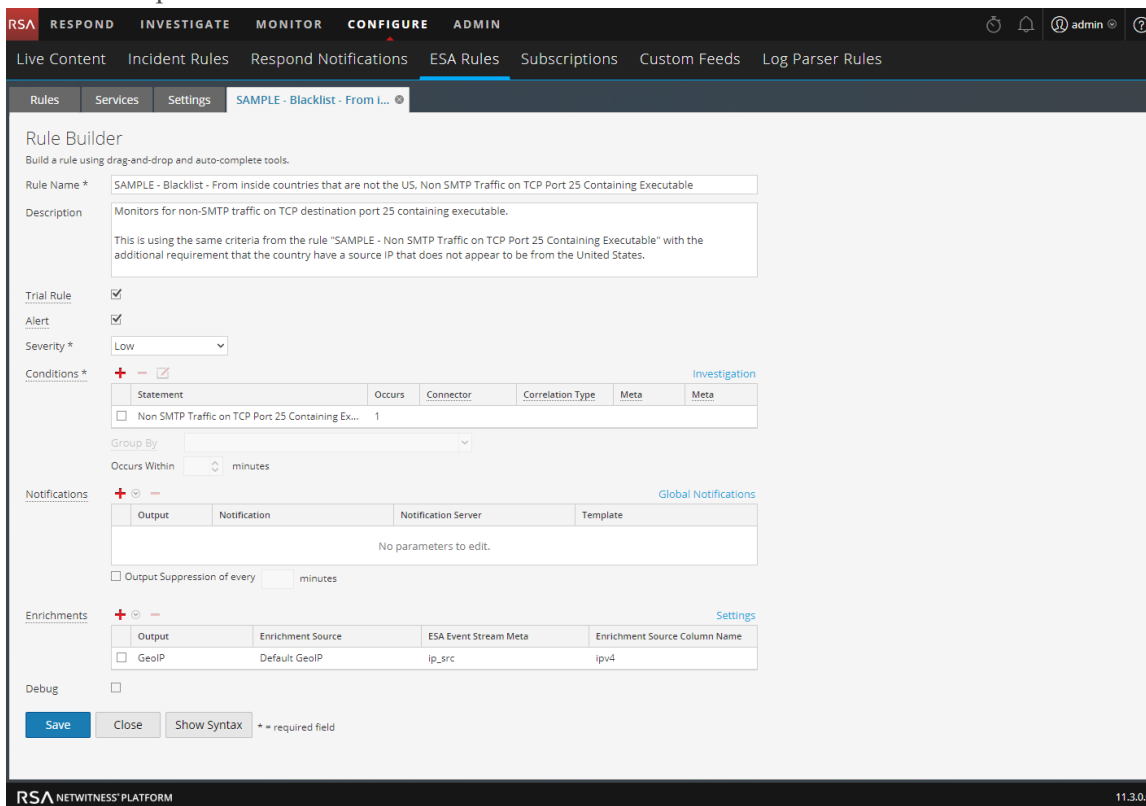

The screenshot shows the RSA Rule Builder interface. The top navigation bar includes tabs for Live Content, Incident Rules, Respond Notifications, **ESA Rules**, Subscriptions, Custom Feeds, and Log Parser Rules. The left sidebar has tabs for Rules, Services, and Settings. The main area is titled 'Rule Builder' and contains the following sections:

- Rule Name ***: SAMPLE - Blacklist - From inside countries that are not the US, Non SMTP Traffic on TCP Port 25 Containing Executable
- Description**: Monitors for non-SMTP traffic on TCP destination port 25 containing executable. This is using the same criteria from the rule "SAMPLE - Non SMTP Traffic on TCP Port 25 Containing Executable" with the additional requirement that the country have a source IP that does not appear to be from the United States.
- Trial Rule**: ☒
- Alert**: ☒
- Severity ***: Low
- Conditions ***:

Statement	Occurs	Connector	Correlation Type	Meta	Meta
<input type="checkbox"/> Non SMTP Traffic on TCP Port 25 Containing Ex...	1				
- Notifications**:

Output	Notification	Notification Server	Template
No parameters to edit.			
- Enrichments**:

Output	Enrichment Source	ESA Event Stream Meta	Enrichment Source Column Name
<input type="checkbox"/> GeoIP	Default GeoIP	Ip_src	Ipv4
- Debug**: ☐

At the bottom, there are buttons for Save, Close, and Show Syntax, along with a note that '*' indicates a required field. The footer shows 'RSA NETWORKS PLATFORM' and version '11.3.0.0'.

3. To practice with a starter pack rule, refer to the following topics for detailed descriptions and procedures:
- To familiarize yourself with the Rule Builder user interface, see [Rule Builder Tab](#) for a description of each field.
 - To learn how to edit a rule, see [Add a Rule Builder Rule](#) for a step-by-step procedure.
 - To deploy a starter pack rule, see [Deploy Rules to Run on ESA](#) to learn how to associate the rule with an ESA service.

After you practice with starter pack rules, you will be able to download, create, and deploy your own rules.

Work with Trial Rules

The ESA Correlation service is capable of processing large volumes of disparate event data from Concentrators. However, when working with ESA Correlation rules, it is possible to create rules that use excessive memory. This can slow your ESA service or even cause it to shut down unexpectedly. To ensure that rules do not use excessive memory, you can enable them as trial rules. You should disable the trial rule setting only after testing the new rule in your environment during times of both normal and peak network traffic.

You can set a global threshold of the percentage of memory that trial rules may use. If that configured memory threshold is exceeded, all trial rules are disabled automatically. To configure the memory threshold, see "Change Memory Threshold for Trial Rules" in the *ESA Configuration Guide*.

For suggestions on creating more efficient rules, see "Best Practices for Writing Rules" in [Best Practices](#).

By default, new rules and RSA Live rules that you import are configured as trial rules. As a best practice, when you edit an existing rule, select the Trial Rule option, which allows you to deploy the rule with an added safeguard.

Note: Run a rule as a trial rule long enough to assess the performance during normal and peak network traffic.

Deploy Rules as Trial Rules

This topic explains to administrators how to enable trial rules when creating new rules or editing rules. Trial rules are automatically disabled if a specified total JVM memory utilization threshold is exceeded.

1. Go to **CONFIGURE > ESA Rules**.

The Configure ESA Rules view is displayed with the Rules tab open.

- From the Rule Library, choose to add or edit a rule. The rule builder is displayed in a new tab.

Rule Builder
Build a rule using drag-and-drop and auto-complete tools.

Rule Name * SAMPLE - Blacklist - From inside countries that are not the US, Non SMTP Traffic on TCP Port 25 Containing Executable

Description
Monitors for non-SMTP traffic on TCP destination port 25 containing executable.
This is using the same criteria from the rule "SAMPLE - Non SMTP Traffic on TCP Port 25 Containing Executable" with the additional requirement that the country have a source IP that does not appear to be from the United States.

Trial Rule ☒

Alert ☒

Severity * Low

Conditions *
+ - ✕ Investigation

Statement	Occurs	Connector	Correlation Type	Meta	Meta
<input type="checkbox"/> Non SMTP Traffic on TCP Port 25 Containing Ex...	1				

Group By

Occurs Within minutes

Notifications + - ✕ Global Notifications

Output	Notification	Notification Server	Template
No parameters to edit.			

☐ Output Suppression of every minutes

Enrichments + - ✕ Settings

Output	Enrichment Source	ESA Event Stream Meta	Enrichment Source Column Name
<input type="checkbox"/> GeoIP	Default: GeoIP	ip_src	ipv4

Debug ☐

Save Close Show Syntax * = required field

RSA NETWITNESS PLATFORM 11.3.0.0

- To make a new or existing rule a trial rule, select the **Trial Rule** checkbox.
- Add the rule conditions or modify the rule as needed. For instructions on editing rules, see [Add Rules to the Rule Library](#).
- Click **Save**.
- Ensure that trial rules are enabled for your ESA and that you are satisfied with the thresholds configured for trial rules.
The memory threshold is set in the configuration file. To configure it, see "Change Memory Threshold for Trial Rules" in the *ESA Configuration Guide*.
 - The threshold is configured per ESA and is a percentage of Java Virtual Memory.
 - The configuration parameter, `fatal-percentage`, has a default value of 90.
- Optionally, you can set up the policies in Health and Wellness to send you an email notification if the total JVM memory utilization threshold is exceeded.

The next time you deploy the rule, it runs in trial rule mode.

Note: If a trial rule is disabled, you will need to go to the **CONFIGURE > ESA Rules > Services** tab to re-enable the trial rules. For more instructions on re-enabling trial rules on a service, see [View ESA Stats and Alerts](#).

Add Rules to the Rule Library

This topic explains how to add each type of rule to the rule library. You must add a rule to the Rule Library before you can deploy it. Permission to manage rules is required for all tasks in this section. To add rules, you can download them from ESA Live, create a rule via the Rule Builder, or write advanced EPL rules.

For more details on each of these procedures, see:

- [Download Configurable RSA Live ESA Rules](#)
- [Add a Rule Builder Rule](#)
- [Add an Advanced EPL Rule](#)

In addition to deploying a rule, you can edit, duplicate, import, export, and remove a rule in the Rule Library. For details on these procedures, see [Working with RulesWorking with Rules](#)

Download Configurable RSA Live ESA Rules

This topic explains how to download configurable rules from the NetWitness Platform Live Content Management System so you can customize them to meet your needs.

RSA Live contains a catalog of rules. Each rule has configurable parameters so you can customize the rule for your environment. If RSA Live has a rule to detect events that you want to detect in your network, download the rule to save time. You can edit the configurable parameters and save the rule in your Rule Library. For detailed information about each rule, including whether the rule is for logs, packets, or both, see "RSA ESA Rules" at the following link: <https://community.rsa.com/docs/DOC-43401>

This is an example of how each RSA Live ESA rule is described on RSA Live:

Rule Name	Description
Logins across Multiple Servers	Detects logins from the same user across 3 or more separate servers within 5 minutes. The time window and number of unique destinations are configurable.

As the name shows, the rule looks for logins across multiple servers. The description explains the rule criteria in more detail and specifies which parameters you modify.

Note: When a rule description includes a configurable parameter, the default setting for the parameter is used. In the sample rule, the description states 5 minutes. However, the time window is configurable so 5 is the default number of minutes.


Prerequisites

These are the prerequisites for downloading configurable RSA Live ESA rules;


- Have permission to manage rules
- Create a Live Account. See the *Live Services Management Guide* for details.
- Set up Live on NetWitness Platform. See the *Live Services Management Guide* for details.

Download RSA Live ESA Rules

1. Go to **CONFIGURE > ESA Rules**.
The Rules tab is displayed.

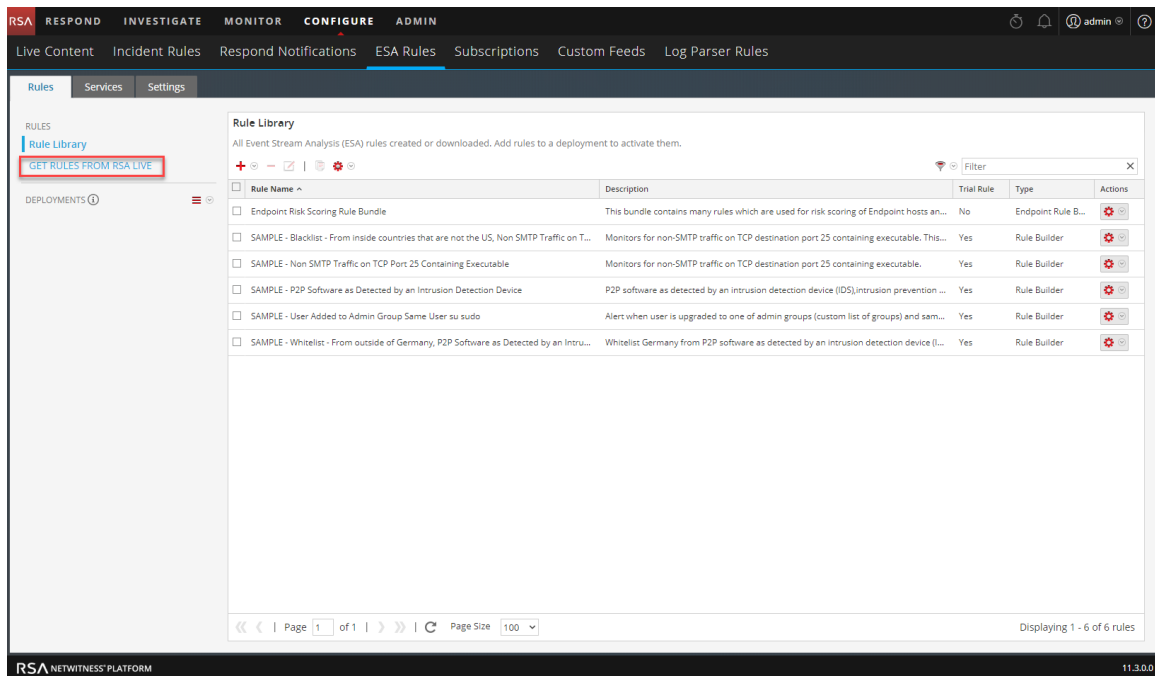



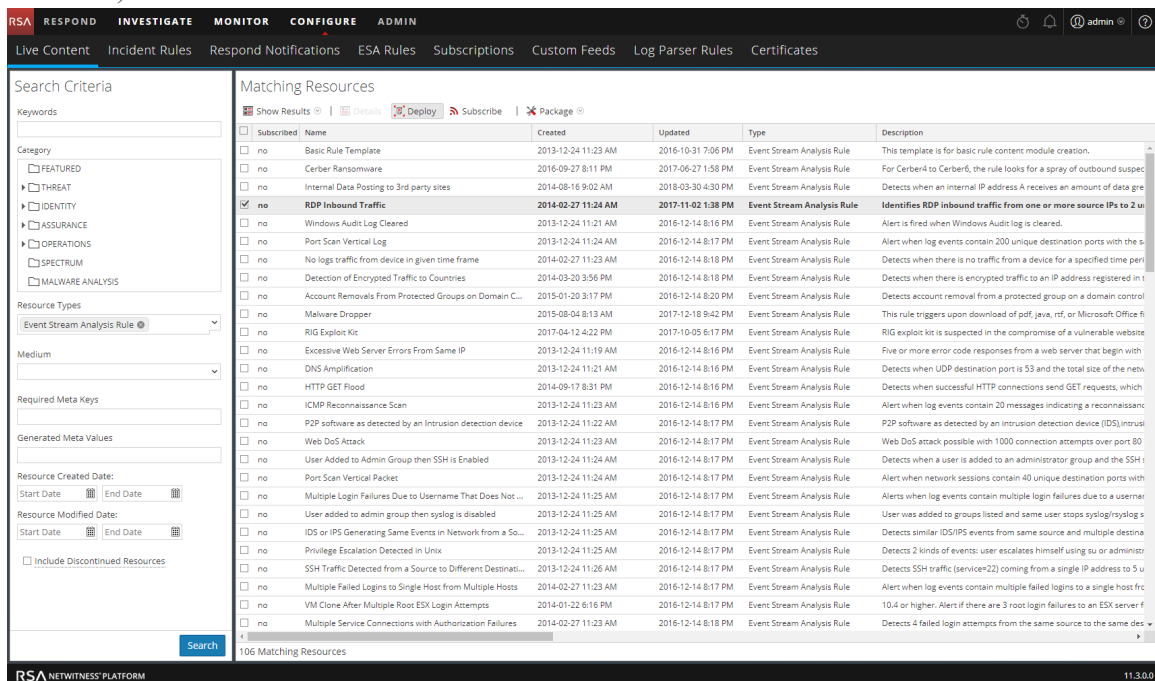




- In the options panel, click **Get Rules from RSA Live**.
The Live Content Search view is displayed. (Alternatively, you can go to **CONFIGURE > Live Content**.)



- In **Search Criteria**, for **Resource Types** select **Event Stream Analysis Rule**.
- Specify any of the following criteria to find a rule to configure for your environment. For detailed information about each rule, including whether the rule is for logs, packets, or both, see "RSA ESA Rules" at the following link: <https://community.rsa.com/docs/DOC-43401>
For a detailed description of the search criteria, see "The Live Search View" in the *Live Services*

Management Guide.

- a. Keywords
 - b. Category
 - c. Resource Types (Event Stream Analysis Rule)
 - d. Medium (Log, Log and Packet, or Packet)
 - e. Required Meta Keys
 - f. Generated Meta Values
 - g. Resource Created Date
 - h. Resource Modified Date
 - i. Include Discontinued Resources
5. Click **Search**. Rules that match the search criteria are displayed in Matching Resources.
 6. Select each rule to download and click **Deploy**.

Matching Resources			
<div> Show Results   Details  Deploy  Subscribe  Package </div>			
<input type="checkbox"/>	Subscribed	Name	Created
<input type="checkbox"/>	no	Basic Rule Template	2013-12-24 11:23 AM
<input type="checkbox"/>	no	Cerber Ransomware	2016-09-27 8:11 PM
<input type="checkbox"/>	no	Internal Data Posting to 3rd party sites	2014-08-16 9:02 AM
<input checked="" type="checkbox"/>	no	RDP Inbound Traffic	2014-02-27 11:24 AM

The Deployment Wizard is displayed.

The Deployment Wizard interface shows a progress bar with four steps: Resources, Services, Review, and Deploy. The Resources tab is active, displaying a table of resources and their dependencies.

Total resources : 5

Resource Names	Resource Type	Dependency of
RDP Inbound Traffic	Event Stream Analy...	
Failed Logins Outside Business Hours	Event Stream Analy...	
RDP_lua	Lua Parser	RDP Inbound Traffic
traffic_flow	Lua Parser	RDP Inbound Traffic
Investigation	Feed	RDP_lua,traffic_flow

Buttons: Cancel, Next

- Follow the steps in the wizard. If you need more information, see "Deploy Resources in Live" in the *Live Services Management Guide*.

When you finish the steps in the wizard, the selected rules are displayed in the Rule Library.

Customize an RSA Live ESA Rule

This topic explains how to configure parameters in an RSA Live ESA rule. When you download an RSA Live ESA rule, the rule appears in the Rule Library which includes the following columns:

- Rule Name
- Description
- Trial Rule
- Type
- Actions

The Rule Library interface shows a table of rules with columns: Rule Name, Description, Trial Rule, Type, and Actions. There are two rules listed.


Rule Name	Description	Trial Rule	Type	Actions
User Account Created and Deleted within an Hour	User account created and deleted within an hour	No	RSA Live ESA Rule	[Gear icon]
Port Scan Horizontal Log	Series of log events indicating a port scan.	Yes	RSA Live ESA Rule	[Gear icon]

The type is RSA Live ESA Rule.

Prerequisites

- Administrator, Operator, SOC Manager, or DPO role permissions are required.
- Rules must be downloaded to the Rule Library.

Configure Parameters for an RSA Live ESA Rule

1. Go to **CONFIGURE > ESA Rules > Rules** tab.
2. In the **Rule Library**, double-click an RSA Live ESA Rule or select the rule and click . The RSA Live ESA Rule tab is displayed.
3. (Optional) Change the following fields:
 - Rule Name
 - Description
 - Trial Rule (Enabled by default. RSA recommends you run a rule as a trial rule long enough to assess the performance during normal and peak network traffic.)
 - Alert (This option applies to 11.3 and later.) Select Alert to send an alert to Respond. Clear the checkbox if you do not want to send an alert to Respond. To turn alerts on or off for ALL rules, see the *ESA Configuration Guide*.
 - Severity
 - Notifications
 - Enrichments
4. To configure the rule for your environment, in the **Parameters** section replace the default in the **Value** Column.

Parameters	Name ^		Value
	With this number of events		200
	Within this number of seconds		60

5. Click **Save**

Add a Rule Builder Rule

Each ESA rule is designed to detect something in your network and to generate an alert for it:

- User activity that is not allowed, such as attempting to download software that is not sanctioned
- Suspicious behavior, such as mass audit clearing
- Known malicious threats, such as worm propagation or a password-cracking tool

There are two methods to design a rule in ESA:

- **Rule Builder** is an easy-to-use interface. You provide a meta key and value, then select choices from lists to complete the criteria.
- **Advanced EPL** allows you to write queries in the Event Processing Language. You must know EPL syntax.

If you know EPL, you can use either method. If you do not know EPL, you should use Rule Builder. These topics explain the Rule Builder.

Step 1. Name and Describe the Rule

This topic provides instructions to identify a rule, indicate if it is a trial rule and assign a severity level. When you add a new rule, the first information to provide is a unique name and description of what the rule detects. After you save the rule, this information is displayed in the Rule Library.

Prerequisites


You must have permission to manage rules. See [Role Permissions](#).

Name and Describe a Rule

1. Go to **CONFIGURE > ESA Rules > Rules** tab.

2. In the **Rule Library**, select   > **Rule Builder**.

The New Rule tab is displayed.

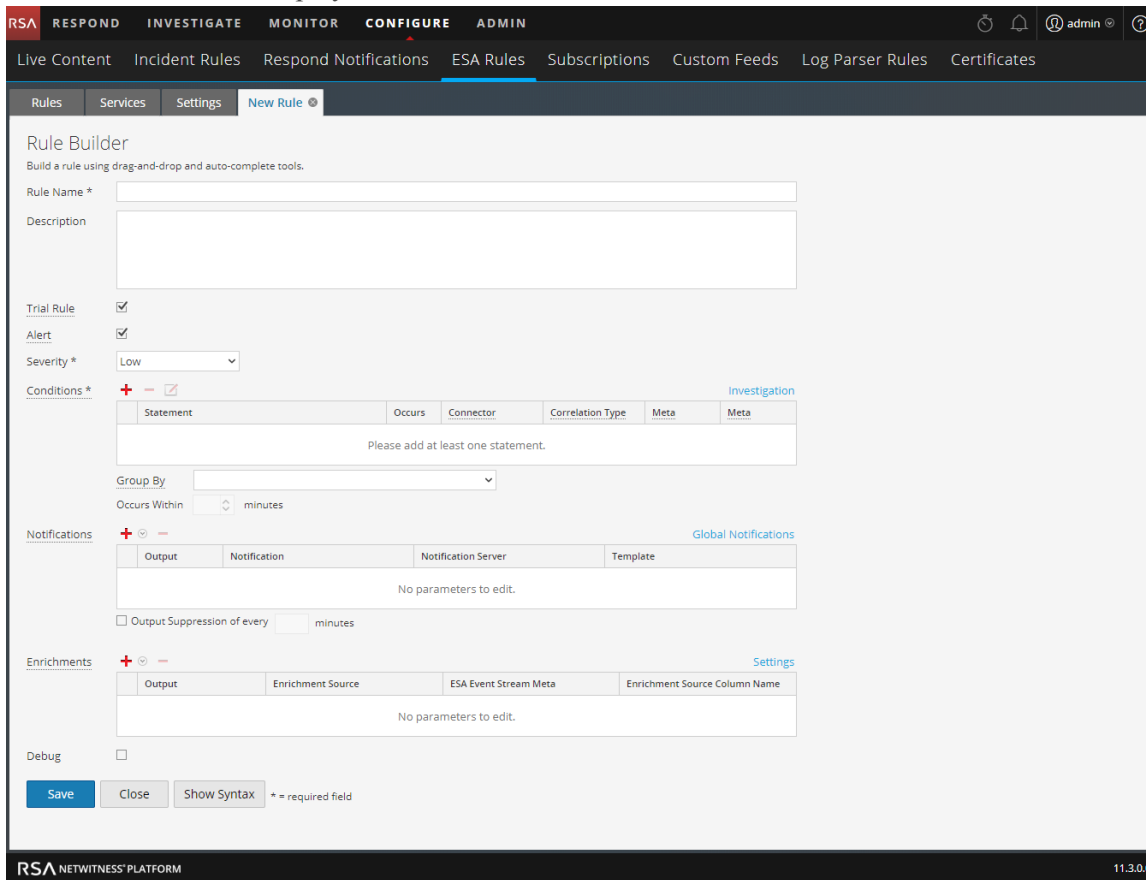

Rule Builder
Build a rule using drag-and-drop and auto-complete tools.




Rule Name *

Description

Trial Rule ☒

Alert ☒




Severity * Low

Conditions *    [Investigation](#)

Statement	Occurs	Connector	Correlation Type	Meta	Meta
Please add at least one statement.					




Group By

Occurs Within minutes

Notifications    [Global Notifications](#)

Output	Notification	Notification Server	Template
No parameters to edit.			

☐ Output Suppression of every minutes

Enrichments    [Settings](#)

Output	Enrichment Source	ESA Event Stream Meta	Enrichment Source Column Name
No parameters to edit.			

Debug ☐

Save **Close** **Show Syntax** * = required field

RSA NETWITNESS PLATFORM 11.3.0.0

- Type a unique, descriptive name in the **Rule Name** field.
This name will appear in the Rule Library so be specific enough to distinguish the rule from others.
- In the **Description** field, explain which events the rule detects.
The beginning of this description will appear in the Rule Library.
- By default, new rules are configured as a Trial Rule. A trial rule automatically disables the rule if all trial rules collectively exceed the memory threshold. If you are editing an existing rule, you can select **Trial Rule** to safely test the rule edits.
Use trial rule mode as a safeguard to see if a rule runs efficiently and to prevent downtime caused by running out of memory. For more information, see [Work with Trial Rules](#).
- (This option applies to 11.3 and later.) Select **Alert** to send an alert to Respond. Clear the checkbox if you do not want to send an alert to Respond. To turn alerts on or off for ALL rules, see the *ESA Configuration Guide*.
- For **Severity**, classify the rule as Low, Medium, High or Critical.

Step 2. Build a Rule Statement

This topic provides instructions to define rule criteria in Rule Builder by adding statements. A statement is a logical grouping of rule criteria in the Rule Builder. You add statements to define what a rule detects.

Example

The following graphic shows an example of a Rule Builder statement.

Every statement contains a key and value. Then, you build logic around the pair by selecting an option in each other field.

Build a Statement

Define a rule condition by adding one or more statements. For each statement, define the keys, operators, and values that will trigger the rule. If the contents of the value field include more than one value, you must specify that it should be evaluated as an array.

Name *

if all conditions are met + -

Key	Operator	Value	Ignore Case?	Array?
<input type="checkbox"/> event.medium	is	32	<input type="checkbox"/>	<input type="checkbox"/>
<input checked="" type="checkbox"/> event.device_class	is	IDS, Firewall, IPS, Intrusion, Vuln...	<input type="checkbox"/>	<input checked="" type="checkbox"/>

Prerequisites

To build a rule statement, you must know the meta key and the meta value.

For a complete list of meta keys, go to **CONFIGURE > ESA Rules > Settings > Meta Key References**.

Build a Rule Statement

1. Go to **CONFIGURE > ESA Rules**.

The Rules tab is displayed by default.

2. In the **Rule Library**, click + ⌵ > **Rule Builder** or edit an existing Rule Builder rule.

The Rule Builder view is displayed.

3. In the **Conditions** section, click +.

The Build Statement dialog is displayed.

Build a Statement

Define a rule condition by adding one or more statements. For each statement, define the keys, operators, and values that will trigger the rule. If the contents of the value field include more than one value, you must specify that it should be evaluated as an array.

Name *

if all conditions are met + -


Key	Operator	Value	Ignore Case?	Array?
<input checked="" type="checkbox"/> event.ec_outcome	is	Failure	<input type="checkbox"/>	<input type="checkbox"/>

4. **Name** the statement. Be clear and specific. The statement name will appear in the Rule Builder.
5. From the drop-down list, select which circumstances the rule requires:
 - if **all conditions** are met
 - if **one of these conditions** are met
6. Specify the criteria for the statement:
 - a. For **Key**, type the name of the **Meta Key**.
 - b. For **Operator** specify the relationship between the meta key and the value you will provide for it. The operator that you use depends on the metadata type. The choices are: is, is not, is not null, is greater than (>), is greater than or equal to (>=), is less than (<), is less than or equal to (<=), is one of (For array type meta), is not one of (For array type meta), contains, not contains, begins with, ends with
 - c. Type the **Value** for the meta key. Do not add quotes around a value. Separate multiple values with a comma.
 - d. The **Ignore Case?** field is designed for use with string and string array values. By choosing the **Ignore Case** field, the query will treat all string text as a lowercase value. This ensures that a rule that searches for the user named Johnson would trigger if the event contains "johnson," "JOHNSON," or "JoHnSoN."
 - e. The **Array?** field indicates if the contents of the Value field represent one or more than one value. Select the Array checkbox if you entered multiple, comma-separated values in the **Value** field. For example, "ec_activity is Logon, Logoff" requires you to select the Array checkbox.
7. To use another meta key in the statement, click +, select **Add Meta Condition** and repeat step 6.
8. To add a whitelist, click + and select **Add Whitelist Condition**.
9. To add a blacklist, click + and select **Add a Blacklist Condition**.

10. To save the statement, click **Save**.

To Add a Whitelist


You use a whitelist to ensure that specified entities are excluded from triggering the rule. Whitelists can be based on geographic location, in-memory enrichment, or Context Hub list sources. For example, if you want to create a rule that only triggers for IP addresses outside of the US, you can create a whitelist of US IP addresses.

1. After you add a meta condition, click  and select **Add Whitelist Condition**.
2. In the **Enter Whitelist Name** field, select an enrichment source. Any in-memory enrichment, Context Hub list, or a named window in Esper can be used as the source for a whitelist.
3. For the subcondition:
 - a. If you used a GeoIP source for the whitelist, ipv4 is automatically entered for the subcondition. Enter the meta value for the corresponding value field. For example, enter *ipv4 is ip_src* to ensure the GeoIP records are selected based upon the ip_src being found in the GeoIP lookup database. In addition, if you used a GeoIP source for the whitelist, you might want to add a subcondition to specify the geographic region to exclude from the rule results. For example, to specify that the country code must be USA, enter "*CountryCode is US*".
 - b. If you used a Context Hub list for the whitelist, select a column name from the list, then select an operator and enter the meta value for the corresponding value field.

Note: An *Entity* is a specified piece of meta, such as IP address, MAC address, user, host, domain, file name, or file hash.

To Add a Blacklist

You use a blacklist to ensure that specified entities trigger the rule. Blacklists can be based on geographic location, in-memory enrichment, or Context Hub list sources.. For example, you can specify that the rule only includes results from Germany.

1. After you add a meta condition, click  and select **Add Blacklist Condition**.
2. In the **Enter Blacklist Name** field, select an enrichment source. Any in-memory enrichment, Context Hub list, or a named window in Esper can be used as the source for a blacklist.
3. For the subcondition:
 - a. If you used a GeoIP source for the blacklist, ipv4 is automatically entered for the subcondition. Enter the meta value for the corresponding value field. For example, enter *ipv4 is ip_src* to ensure the GeoIP records are selected based upon the ip_src being found in the GeoIP lookup database. In addition, if you used a GeoIP source for the blacklist, you might want to add a subcondition to specify the geographic region to include in the rule results. For example, to specify that the rule only includes results for Germany, enter "*CountryCode is DE*".
 - b. If you used a Context Hub list for the blacklist, select a column name from the list, then select an operator and enter the meta value for the corresponding value field.

Example: Blacklist

The following statement shows a blacklist statement for a rule that monitors for non-SMTP traffic on TCP destination port 25 containing an executable from countries that are outside of the United States.

Build a Statement

Define a rule condition by adding one or more statements. For each statement, define the keys, operators, and values that will trigger the rule. If the contents of the value field include more than one value, you must specify that it should be evaluated as an array.

Name *

if all conditions are met + ✓ -

<input type="checkbox"/>	Key	Operator	Value	Ignore Case?	Array?
<input type="checkbox"/>	event.service	is not	25	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	event.tcp_dstport	is	25	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	event.extension	is	exe,com,vb,vbs,vbe,cmd,bat,ws,ws...	<input type="checkbox"/>	<input checked="" type="checkbox"/>
<input type="checkbox"/>	blacklist.GeoIpLookup				
<input type="checkbox"/>	ipv4	is	event.ip_src	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	countryCode	is not	US	<input type="checkbox"/>	<input type="checkbox"/>

Blacklist conditions can be added to include only those items defined in an enrichment list. Map a list column to an event meta key to join the list to the incoming data stream.

Cancel Save

Statement	Description
service is not 25	The traffic is not SMTP traffic.
tcp_dstport is 25	The traffic is running on TCP port 25.
extension is exe, com,vb,vbs,vbe,cmd,bat,ws,wsf,src,sh	The file extension is an executable.
GeoIpLookup	The blacklist is based on a GeoIPLookup source.
ipv4 is ip_src	The GeoIP records are selected based upon the ip_src being found in the GeoIP lookup database.
countryCode is not US	When looking up the IP address Event.ip_src in the GeoIP database, the record it returns does not contain "US" in the countryCode field.

Example: Ignoring Case, Strict Pattern Matching, and Using The *Is Not Null*

Operator

The following example uses the ability to ignore case, exclude null values, and create a strict pattern match to ensure that it returns the expected rule results. The following conditions make up the rule:

Conditions *
+ - ✕
Investigation

Statement	Occurs	Connector	Correlation Type	Meta	Meta
<input type="checkbox"/> Failures	5	followed by			
<input checked="" type="checkbox"/> Success	1	AND			
<input type="checkbox"/> ModifyPassword	1				

Group By

device_class user_dst

Occurs Within
5 minutes
Event Sequence
☒ Strict
☐ Loose

Rule Condition	Description
Failures	This condition searches for five failed logins with a "followed by" connector, meaning that the condition (Failures) must be followed by the next condition (Success).
Success	This condition searches for one successful login.
ModifyPassword	This condition searches for an instance where the password is modified.
GroupBy: user_dst, device class	The GroupBy field ensures that all the previous conditions are grouped by the user_dst meta (the user destination account) and device class. This is important to the construction of the rule because the rule attempts to find a case where a user has attempted to log into the same destination account multiple times, finally logged in successfully, and then changed the password. Grouping by device class ensures that the user logged in from the same machine attempted to log into an account multiple times. The rule may give unexpected results if you do not group the results.
Occurs within 5 minutes	The time window for the events to occur is five minutes. If the events occur outside of this time window, the rule does not trigger.
Event Sequence: Strict	<p>The event sequence is configured for a strict pattern match. This means that the pattern must match exactly as it is specified with no intervening events.</p> <p>Strict pattern matching allows you to ensure that the Esper engine only generates alerts for rules that exactly match the pattern you want to find. For example, a common rule might be to search for five failed logins followed by a successful login. If you select a loose pattern match, this rule will trigger if there are any number of successful logins between the failed logins. Since the point of the rule is to find frequent <i>and</i> sequential login attempts, a strict match is required to ensure that you get the results you expect.</p>

Note: Each of these conditions is explained in further detail in the sections below.

For each condition, a statement is built in the Rule Builder. The following statement makes up the Failures condition:

Build a Statement

Define a rule condition by adding one or more statements. For each statement, define the keys, operators, and values that will trigger the rule. If the contents of the value field include more than one value, you must specify that it should be evaluated as an array.

Name *

if all conditions are met + - ~

Key	Operator	Value	Ignore Case?	Array?
<input type="checkbox"/> event.ec_activity	is	Logon	<input checked="" type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/> event.ec_outcome	is	Failure	<input checked="" type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/> event.user_dst	is not null		<input type="checkbox"/>	<input type="checkbox"/>

Rule Statement	Description
ec-activity is Logon (ignore case)	Identifies activity that attempts to log on to a system. The Ignore Case field is designed for use with string and string array values. By choosing the Ignore Case field, the query will treat all string text as a lowercase value. You may want to use this field if you are unsure what case may be used when logging a particular event. Because the case is ignored, the rule can trigger if the activity is logged as Logon, logon, or LoGoN.
ec_outcome is Failure (ignore case)	Identifies activity outcome logged as "failure." Because the case is ignored, the rule can trigger if the activity is logged as "failure", "Failure," or "FaiLuRe."
user_dst is not null	Ensures that the condition is only true if user_dst is populated. The is not null operator allows you to ensure that a field returns a value. You may want to use this field when a rule depends on a particular field returning a value. For example, you want to create a rule that identifies the same user attempting to log into the same destination account multiple times (potentially a password-guessing attack). If the field that represents the user destination account is empty, you don't want the rule to trigger. To ensure the field contains a value, you use the is not null operator.

The following statement makes up the Success condition:

Build a Statement

Define a rule condition by adding one or more statements. For each statement, define the keys, operators, and values that will trigger the rule. If the contents of the value field include more than one value, you must specify that it should be evaluated as an array.

Name *

if all conditions are met + -

Key	Operator	Value	Ignore Case?	Array?
<input type="checkbox"/> event.ec_activity	is	Logon	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/> event.ec_outcome	is	Success	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/> event.user_dst	is not null		<input type="checkbox"/>	<input type="checkbox"/>

Cancel Save

Rule Statement	Description
ec_activity is Logon	Identifies logon activity.
ec_outcome is Success	Identifies a logon that is successful.
user_dst is not null	Ensures that user destination account field must be populated for the condition to be true.

The following statement makes up the ModifyPassword condition:

Build a Statement

Define a rule condition by adding one or more statements. For each statement, define the keys, operators, and values that will trigger the rule. If the contents of the value field include more than one value, you must specify that it should be evaluated as an array.

Name *

if all conditions are met + -

Key	Operator	Value	Ignore Case?	Array?
<input type="checkbox"/> event.user_dst	is not null		<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/> event.ec_subject	is	Password	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/> event.ec_activity	is	Modify	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Cancel Save

Rule Statement	Description
user_dst is not null	Ensures the user destination account field must be populated for the condition to be true.
ec_subject is Password	Identifies a subject of Password.
ec_activity is Modify	Identifies activity where the password was modified.

Example Results

When the alert fires for the above example rule, you can see that the rule triggered for seven events, and that each event contains a user. You can also see that the events follow a strict pattern: five failed login events, followed by a successful login event, followed by a modification to the account.

The following figure shows the alert in the Respond Alerts List view.

TIME RANGE	CREATED	SEVERITY	NAME	SOURCE	# EVENTS	HOST SUMMARY	INCIDENT ID
Last 5 Minutes	08/25/2017 03:50:43 pm	90	5 Failed Logins Followed By Successful Login Strict...	Event Stream Analysis	7	10.100.33.1 to 7 hosts	

The next figure shows the events in the alert in the Respond Alert Details view.

	TIME	TYPE	SOURCE IP	SOURCE PORT	SOURCE HOST	SOURCE MAC	SOURCE USER	DESTINATION IP	DESTINATION P...	DESTINATION HOST	DESTINATION MAC	DESTINATION U
Incident ID: (None)	08/25/2017 03:50:40.000 ...	Log	10.100.33.1					10.100.33.1				Auser1
Created: 08/25/2017 03:50:43 pm	08/25/2017 03:50:40.000 ...	Log	10.100.33.1					10.100.33.2				Auser1
Severity: 90	08/25/2017 03:50:40.000 ...	Log	10.100.33.1					10.100.33.3				Auser1
Source: Event Stream Analysis	08/25/2017 03:50:40.000 ...	Log	10.100.33.1					10.100.33.4				Auser1
Type: Log	08/25/2017 03:50:40.000 ...	Log	10.100.33.1					10.100.33.5				Auser1
# Events: 7	08/25/2017 03:50:40.000 ...	Log	10.100.33.1					10.100.33.6				Auser1
Host Summary: 10.100.33.1 to 7 hosts	08/25/2017 03:50:40.000 ...	Log	10.100.33.1					10.100.36.78				Auser1

Drilling down into the Investigation module by clicking on the source for one of the events, you can see the case for each of the string values. Because you used **Ignore Case**, the rule would trigger if the string values were upper or lower case.

Navigate Events Malware Analysis				
NWNNodeXLCL51612 - Log Decoder Last 5 Minutes Query Profile Detail View Actions Incidents				
device.ip exists device.disc exists device.disc = 85 device.disc = 85 Cancel				
Event Time	Event Type	Event Theme	Size	Details
		Logins		<div>header.id : 0001</div> <div>level : 6</div> <div>netname : private src</div> <div>netname : private dst</div> <div>Show Additional Meta Event Analysis</div>
				<div><-> 10.100.33.1 -> 10.100.33.3</div> <div><-> sessionId : 54</div> <div>device.ip : 127.0.0.1</div> <div>medium : 32</div> <div>device.type : ciscoasa</div> <div>device.class : Firewall</div> <div>header.id : 0001</div> <div>level : 6</div> <div>netname : private src</div> <div>netname : private dst</div> <div>direction : lateral</div> <div>user.dst : Auser3</div> <div>ec.subject : User</div> <div>ec.activity : Logon</div> <div>ec.theme : Authentication</div> <div>ec.outcome : Failure</div> <div>reference.id : 605004</div> <div>event.desc : Login denied</div> <div>result : Login denied</div> <div>msg.id : 605004</div> <div>event.cat.name : User.Activity.Failed Logins</div> <div>device.disc : 85</div> <div>Hide Additional Meta Event Analysis</div>
<input type="checkbox"/>	2017-08-25T15:46:11 Log	User.Activity.Failed Logins	137 bytes	

Example: Grouping the Rule Results

The **Group By** field allows you to group and filter rule results. For example, suppose that there are three user accounts; Joe, Jane, and John and you use the **Group By** meta, `user_dst`. The result will show events grouped under the accounts for Joe, Jane, and John.

You can also group by multiple keys, which can further filter rule results. For example, you might want to group by user destination account and machine to see if a user logged into the same destination account from the same machine attempts to log into an account multiple times. To do this, you might group by `device_class` and `user_dst`.

The following example shows a rule grouped by `device_class` and `user_dst`.

Rule Builder
Build a rule using drag-and-drop and auto-complete tools.

Rule Name * 5F1S with MultipleGroup by

Description 5 Failures followed by 1 Success with
Group by: Device class, Destination User Account

Trial Rule ☐

Severity * Low

Conditions * + - ✕ Investigation

Statement	Occurs	Connector	Correlated On
<input type="checkbox"/> Failed Logins	5	followed by	
<input type="checkbox"/> Successful Login	1		

Group By: user_dst device_class

Occurs Within 5 minutes Event Sequence ☒ Strict ☐ Loose

Rule Condition	Description
Failed Logins	Identifies five failed login attempts (must be followed by the next condition; that is, the five failed logins must be followed by a successful login).
Successful Login	Identifies one successful login.
Group By: user_dst and device_class	Groups the rule results by user_dst (user destination account) and device_class (type of machine the user is logging in from). This allows the rule to look for a user logged in from the same machine to the same destination account, resulting in a much more targeted rule result.
Occurs within 5 minutes with a strict pattern match	The events must occur within five minutes, and the pattern matching is strict, meaning it must follow the pattern exactly for the rule to trigger.

Example: Working with Numeric Operators

Numeric operators allow you to write rules against numeric values, such as specifying that a value is greater than, less than, or equal to a specific value. This is useful particularly for cases where you might want to specify a numeric threshold, that is, *payload is greater than 7000*.

The following example attempts to identify a data transfer to a particular destination through the common ports where the transfer size is high and the payload is in a suspicious range.

Build a Statement

Define a rule condition by adding one or more statements. For each statement, define the keys, operators, and values that will trigger the rule. If the contents of the value field include more than one value, you must specify that it should be evaluated as an array.

Name *

if all conditions are met + ⊖ —

<input type="checkbox"/>	Key	Operator	Value	Ignore Case?	Array?
<input type="checkbox"/>	event.ip_dst	is	10.10.10.1	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	event.ip_dstport	is less than or equal	1024	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	event.size	is greater than or equal	10000	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	event.payload	is greater than	7000	<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	event.payload	is less than	8000	<input type="checkbox"/>	<input type="checkbox"/>

Cancel Save

Rule Statement	Description
ip_dst is 10.10.10.1	The destination port is 10.10.10.1.
ip_dstport is greater than or equal to 1024	The destination port is in a commonly used port range, 1024 or greater.
size is greater than or equal to 10000	The size of the transfer is 10000 or greater, which is a suspiciously large transfer.
payload is greater than 7000	The payload is between 7000 and 8000, which is a suspiciously large payload.
payload is less than 8000	The payload is between 7000 and 8000, which is a suspiciously large payload.

Step 3. Add Conditions to a Rule Statement

This topic provides instructions to add conditions, such as specifying a certain time frame, to a rule statement. When you build a statement, you specify what a rule detects. You add conditions to make further stipulations, such as how many times or when the criteria must occur.

Example

The following graphic shows an example of the conditions for Rule Builder statements. Combined, the statements and conditions comprise the rule criteria.

Statement	Occurs	Connector	Correlation Type	Meta	Meta
<input type="checkbox"/> Failures	5	followed by			
<input checked="" type="checkbox"/> Success	1	AND			
<input type="checkbox"/> ModifyPassword	1				


Group By:

Occurs Within: minutes ☒ Strict ☐ Loose

This rule detects 5 failed logon attempts followed by one successful logon, which could be the sign that someone has hacked into user account. This is the criteria for the rule:

- 5 failed logons are required.
- 1 successful logon must follow the failures
- A password was changed.
- All events must occur within 5 minutes.
- Group alerts by user (user_dst), because steps A and B must be performed on the same user destination account. Also, group by machine (device_class) to ensure that the user logged in from the same machine attempts to log into an account multiple times.
- The match is a strict pattern, meaning that the pattern must match exactly with no intervening events.

Add Conditions to a Rule Statement

- In the **Conditions** section, select a statement and click .
- For **Occurs**, enter a value to specify how many occurrences are required to meet the rule criteria.
- If you have multiple statements, in the **Connector** field select a logical operator to join one statement to another:
 - followed by
 - not followed by
 - AND
 - OR
- Correlation Type** applies only to **followed by** and **not followed by**. If you choose a correlation type of SAME, select one meta to correlate on, and if you choose a correlation type of JOIN, select two meta to correlate on. You may want to use JOIN if you are trying to correlate on meta from two different data sources. For example, say you want to correlate an AV alert with an IDS alert. See the examples below for a use case where two meta from different sources are joined.
- If events must happen within a specific timeframe, enter a number of minutes in the **Occurs Within** field.
- Choose whether the pattern must follow a **Strict** match or a **Loose** match. If you specify a strict match, this means that the pattern must occur in the exact sequence you specified with no additional events occurring in between. For example, if the sequence specifies five failed logins (F) followed

by a successful login (S), this pattern will only match if the user executes the following sequence: F,F,F,F,F,S. If you specify a loose match, this means that other events may occur within the sequence, but the rule will still trigger if all of the specified events also occur. For example, five failed login attempts (F), followed by any number of intervening successful login attempts (S), followed by a successful login attempt might create the following pattern: F,S,F,S,F,S,F,S,F,S which would trigger the rule despite the intervening successful logins.

7. Choose the fields to group by from the dropdown list. The **Group by** field allows you to group and evaluate the incoming events. For example, in the rule that detects 5 failed logon attempts followed by 1 successful attempt, the user must be the same, so user_dst is the **Group By** meta key. You can also group by multiple keys. Using the previous example, you might want to group by user and machine to ensure that the same user logged in from the same machine attempts to log into an account multiple times. To do this, you might group by device_class and user_dst.

Example

The following graphic shows an example of the conditions for a rule that allow you to evaluate the same entities across multiple devices so you can accomplish complex use cases. For example, you can create a rule that triggers if an IDS (Intrusion Detection System) alert is followed by an AV(Anti-virus) alert for the same workstation. The work station key is not the same between the two (IDS & AV) sources, so you can perform a JOIN in order to evaluate the different entities.

In the IDS alert, the workstation is identified by the source IP address from the IDS alert, and would be compared to the destination IP address from the AV alert.

Conditions *		Investigation				
	Statement	Occurs	Connector	Correlation Type	Meta	Meta
<input type="checkbox"/>	IDS Check	1	followed by	JOIN	ip_src	ip_dst
<input type="checkbox"/>	Antivirus Check	1				

Group By:

Occurs Within: minutes

This is the criteria for the rule:

- A. An IDS alert occurs.
- B. The destination IP address from the AV alert and source IP address for the workstation from the IDS alert are joined to allow you to view the same entities across different sources.
- C. An Antivirus alert follows the IDS alert.

Add an Advanced EPL Rule

This topic provides instructions to define rule criteria by writing an EPL query. EPL is a declarative language for handling high-frequency time-based event data. It is used to express filtering, aggregation, and joins over possibly sliding windows of multiple event streams. EPL also includes pattern semantics to express complex temporal causality among events.

Write an advanced EPL rule when rule criteria is more complex than what you can specify in Rule Builder.

It is outside the scope of this guide to explain EPL syntax.


- For EPL Documentation, see <http://www.espertech.com/esper/esper-documentation/>
- For the EPL Online Tool, see <http://esper-epl-tryout.appspot.com/epltryout/mainform.html>

Prerequisites

The following are prerequisites for adding an advanced rule:

- You must know Event Processing Language (EPL).
- You must understand ESA Annotations to mark which EPL statements are linked to generating alerts.

Add an Advanced EPL Rule

1. Go to **CONFIGURE > ESA Rules**.
2. In the **Rule Library**, select  > **Advanced EPL**.

The screenshot displays the 'New Advanced EPL Rule' configuration interface. At the top, there's a navigation bar with tabs: Rules, Services, Settings, and a sub-tab 'New Advanced EPL Rule'. Below this, the 'Advanced EPL' section prompts the user to 'Write a rule in Event Processing Language.' It includes input fields for 'Rule Name *', 'Description', 'Trial Rule' (checked), 'Alert' (checked), 'Severity *' (set to 'Low'), and 'Query *'. At the bottom, a 'Notifications' table is shown with columns: Output, Notification, Notification Server, and Template. A message 'No parameters to edit.' is displayed below the table. The footer of the interface reads 'RSA NETWITNESS PLATFORM' and '11.2.0.0'.

3. Type a unique, descriptive name in the **Rule Name** field.
This name will appear in the Rule Library so be specific enough to distinguish the rule from others.
4. In the **Description** field, explain which events the rule detects.
The beginning of this description will appear in the Rule Library
5. Select **Trial Rule** to automatically disable the rule if all trial rules collectively exceed the memory threshold.
Use trial rule mode as a safeguard to see if a rule runs efficiently and to prevent downtime caused by running out of memory. For more information, see [Work with Trial Rules](#).
6. (This option applies to 11.3 and later.) Select **Alert** to send an alert to Respond. Clear the checkbox if you do not want to send an alert to Respond. To turn alerts on or off for ALL rules, see the *ESA Configuration Guide*.
7. For **Severity**, classify the rule as Low, Medium, High or Critical.
8. To define rule criteria, write a **Query** in EPL.

Note: For all meta key names, use an underscore not a period. For example, `ec_outcome` is correct but `ec.outcome` is not.

9. For dynamic statement name generation in ESA, you must enclose the meta keys in curly brackets and include this annotation in the syntax:

```
@Name("RIG {ip_src} {alias_host} {ec_activity}")
```

where,

- RIG is the static part of the statement name
- {ip_src}, {alias_host}, {ec_activity} is the dynamic part of the statement name

Note: If any of the metas in the dynamic part of the statement name has a null value, it is displayed as a static text.

If a rule should generate an alert, include this ESA annotation in the syntax:

```
@RSAAlert
```

For more information on ESA Annotations, see [ESA Annotations](#).

Event Processing Language (EPL)

This topic describes Event Processing Language (EPL), a declarative language for dealing with high frequency time-based event data. ESA uses Event Processing Language (EPL), a declarative language for dealing with high frequency time-based event data. It is used for express filtering, aggregation, and joins over possibly sliding windows of multiple event streams. EPL also includes pattern semantics to express complex temporal causality among events. It can perform, but is not limited to, the following functions:

- Filter Event
- Alert Suppression
- Compute percentages or ratios
- Average, count, min and max for a given time window
- Correlate events arriving in multiple stream
- Correlate events that arrive out of order
- On-Off Windows
- Followed-by and Not Followed-by support
- Regex filter support

Databases require explicit querying to return meaningful data and are not suited to push data as it changes. The developer must implement the temporal and aggregation logic himself. By contrast, the EPL engine provides a higher abstraction and intelligence and can be thought of as a database turned upside-down. Instead of storing the data and running queries against stored data, EPL allows applications to store queries and continuously run the data through. Response from the EPL engine is real-time when conditions occur that match user defined queries.

Advanced ESA rules require correct character case, but in the Investigation view all characters are converted to lowercase. However, the meta may not be lowercase despite appearances in the Investigation view. To ensure you are using the correct case, RSA recommends you use the *toLowerCase()* function. For example,

```
@RSAAlert (oneInSeconds=0)
SELECT * FROM Event (
/* Statement: Download PDF File */
(filetype.toLowerCase() IN ( 'pdf' ) AND medium IN ( 1 ))
OR
```

```

/* Statement: Download EXE File */

(filetype.toLowerCase() IN ( 'windows_executable' , 'x86 pe' , 'windows
executable' ) AND medium IN ( 1 ))

).win:time(5 Minutes)

MATCH_RECOGNIZE (
PARTITION BY ip_src
MEASURES E1 as e1_data , E2 as e2_data
PATTERN (E1+ E2)
DEFINE
E1 as (E1.filetype.toLowerCase() IN ( 'pdf' ) AND E1.medium IN ( 1 )),
E2 as (E2.filetype.toLowerCase() IN ( 'windows_executable' , 'x86 pe' ,
'windows executable' ) AND E2.medium IN ( 1 ))

```

For the purposes of online help, basic statements are used to illustrate how to set up ESA; however, for more information about writing EPL statements, the <http://www.espertech.com> site provides tutorials and examples.

Note: In NetWitness Platform version 11.3, ESA Correlation supports Esper version 7.1.0.

ESA Annotations

This topic describes annotations that NetWitness Platform provides to use in advanced EPL rules.

@RSAAlert Annotation

The @RSAAlert annotation is used to mark which EPL statements are linked to generating alert notifications. It is designed to work with the alert notification suppression feature in the Rule Builder user interface.

The @RSAAlert annotation can be useful when working with alert notifications, especially if you want to filter notifications, such as sending one notification for each user that triggers an alert.

For example, suppose you want to generate alert notifications for login failures. You could add the following statement:

```
@RSAAlert select * from event(msg_id="login_fail")
```

Event number	Message ID	username	src_IP	Time
1	login_fail	alice	1.2.3.4	10:00
2	login_fail	alice	1.2.3.4	10:01
3	login_fail	alice	6.7.8.9	10:01
4	login_fail	bob	1.2.3.4	10:01
5	login_fail	alice	1.2.3.4	10:03

For the above statement, five alert notifications are generated.

However, suppose you wanted to modify the statement to generate one alert for each separate username. You can use the *identifier* attribute. For example, the statement `@RSAAlert(identifier={"username"}) SELECT* FROM Event(msg_id="login_fail")` generates one notification for the first alert for “bob” and one for the first alert for “alice.” Subsequent alerts for “bob” and “alice” are ignored.

You can further distinguish the users by adding details via the identifier variable. For example, you can distinguish by user and IP address using the following statement: `@RSAAlert(identifier={"username", "src_ip"}) SELECT* FROM Event(msg_id="login_fail")`. Then, you would see notifications generated by user name and IP address (one alert for "alice" at 1.2.3.4, another alert for "alice" at 6.7.8.9, and an alert for "bob" at 1.2.3.4).

To use identifiers with Alert Notification Suppression:

The `@RSAAlert` annotation is designed to work with the alert notification suppression feature in the Rule Builder user interface. To do this:

1. Create a rule in the Rule Builder user interface, and select the alert suppression feature when configuring notifications.

Output	Notification	Notification Server	Template
<input checked="" type="checkbox"/> SYSLOG	Local_SysLog	localhost-514	Default Syslog Template

☒ Output Suppression of every minutes

2. Copy the code from the Rule Builder rule into a new advanced rule.
3. Configure the advanced rule to include identifiers (as described above) and save the advanced rule.
4. Delete the original rule builder rule.

@RSAPersist Annotation

The `@RSAPersist` annotation is used to mark a named window as an ESA managed window for persistence. By marking the named window as an ESA managed window, ESA periodically writes the contents of the window to disk and restores them back if the window is un-deployed and re-deployed. The systems take a snapshot just before the module is un-deployed and the window is removed. Conversely, it restores the window contents from the snapshot just after the module is re-deployed. This ensures that the contents of the window are not lost if the module state is altered or if the ESA service goes down.

For example, consider a named window, `DHCPTracker` that holds a mapping from IP addresses to each assigned hostname. You can annotate the statement with the `@RSAPersist` annotation as:

```
@RSAPersist
create window DHCPTracker.std:unique(ip_src) as (ip_src string, alias_
host string);
insert into DHCPTracker select IP as ip_src, HostName as alias_host from
DHCPAssignment (ID=32);
```

Note: All windows definitions are not suitable for persistence. @RSAPersist annotation must be used with care. If the window has timed-records or if it depends on time based constraints it is very likely that the reverted snapshots will not restore it to the correct state. Also, any changes to the window definition will invalidate the snapshots and reset the window to a blank state. The system does not do any semantic analysis to determine if the changes to the window definition are conflicting or not. Note that other parts of a module (that is, other than the particular CREATE WINDOW call that defines the window) may change, without invalidating the snapshots.

@UsesEnrichment (10.6.1.1 and later)

The @UsesEnrichment can be used in advanced EPL rules to reference enrichments. In order to synchronize enrichments with ESA, all enrichment dependencies in EPL rules must be referenced with the @UsesEnrichment annotation.

The @UsesEnrichment annotation uses the following format:

```
@UsesEnrichment(name= '<enrichment_name>')
```

For example, the following EPL references a whitelist enrichment:

```
@UsesEnrichment(name = 'Whitelist')
@RSAAalert
SELECT * FROM Event(ip_src NOT IN (SELECT ip_address FROM Whitelist))
```

@Name

The @Name is the statement name defined in ESA advanced rules. It is used to dynamically generate statement names in ESA alerts. The statement name of only an alert triggering statement is displayed. This annotation has meta keys enclosed in curly brackets.

The @Name annotation uses the following format:

```
@Name("<static_part_of_statement_name> {meta_key1} {meta_key2}...")
```

For example, the following EPL references meta keys *ip_src* and *user_name* whose values will be dynamically generated.

```
@Name("Login Event to {ip_src} by {user_name}")
```

Note: You can specify any number of meta keys in the statement for dynamic statement name generation.

The length of individual meta key is limited to 64, after which the value is truncated and appended with "...".

The length of the dynamic generation of statement name is limited to 128, after which the value is truncated to 128 and appended with "...". All the remaining values post truncation will be treated as static values.

Sample Advanced EPL Rules

Following are the examples of Advanced ESA rules. Each example has multiple ways of implementing the same use-case.

Example #1:

Create an user account and delete the same user account in 300s. User information is stored in user_src meta.

EPL #1:

Rule Name	CreateuseraccountFollowedByDeletionof Useraccount1
Rule Description	Create a user account followed by an action to delete the same user account in 300 seconds.
Rule Code	<pre>SELECT * FROM Event(ec_subject='User' AND ec_outcome='Success' AND user_src is NOT NULL AND ec_activity IN ('Create', 'Delete')) .win:time(300 seconds) match_recognize (partition by user_src measures C as c, D as d pattern (C D) define C as C.ec_activity='Create' , D as D.ec_activity='Delete');</pre>
Note	<ul style="list-style-type: none"> Filter events needed for pattern in given time frame. Filter conditions should be such that only required events are passed to match recognize function. In this case, they are create and delete user account Events. That is, Event(ec_subject='User' AND ec_outcome='Success' AND user_src is NOT NULL AND ec_activity IN ('Create', 'Delete')) Partition by creates buckets. In this case, esper creates buckets per value of user_src. And hence value of user_src is common between both events. Define pattern you want. Right now it is set to Create Followed by Delete. You can do multiple creates followed by delete (C+ D). Pattern is very similar to regular expression. Most efficient use case.

EPL #2:

Rule Name	CreateuseraccountFollowedByDeletionof Useraccount2
Rule Description	Create a user account followed by an action to delete the same user account in 300 seconds.
Rule Code	<pre>SELECT * from pattern[every (a= Event(ec_subject='User' AND ec_outcome='Success' AND user_dst is NOT NULL AND ec_activity IN ('Create')) -> (Event(ec_subject='User' AND ec_outcome='Success' AND user_dst is NOT NULL AND ec_activity IN ('Create')) AND user_src = a.user_</pre>

Note	<pre>src)))where timer:within(300 Sec)];</pre>
	<ul style="list-style-type: none"> • Lets say same user is created twice and deleted once in that order. Then the above pattern will fire 2 alerts. • A thread is created for every User creation. • There is no way to control threads. It is important to have time bonds and preferably small intervals.

Example #2:

Detect pattern where user created followed by login by same user and user is deleted in end. In case of windows logs user info is stored in either user_dst or user_src depending on event.

user_src(create) = user_dst(Login) = user_src(Delete)

EPL #3:

Rule Name	CreateUserLoginandDeleteUser
Rule Description	Detect a pattern where a user creates a User account followed by login by the same user followed by deletion of the User account.
Rule Code	<pre>SELECT * FROM Event(ec_subject='User' and ec_activity in ('Create','Logon','Delete') and ec_theme in ('UserGroup', 'Authentication') and ec_outcome='Success').win:time(300 seconds) match recognize (measures C as c, L as l, D as d pattern (C L D) define C as C.ec_activity = 'Create', L as L.ec_activity = 'Logon' AND L.user_dst = C.user_src, D as D.ec_activity = 'Delete' AND D.user_src = C.user_src);</pre>
Note	<ul style="list-style-type: none"> • Since user_src/user_dst is not common across all events we can't use partition. It will be 1 single bucket running 1 pattern at a time. For example, for user 1 and 2 if the stream of events are C1C2L1D1, C1L1C2D1, there will be no alert because C1 thread got reset by C2. Alert will be fired only if C1L1D1 are in order and no other event either from same user or other user falls in between. • Another solution would be to use Named Window and merge user_dst and user_src into single column and then run match recognize. (EPL #3). • Pattern can also be used. You might get more alerts than expected. (EPL #4).

EPL #4: Using NamedWindows and match recognize

Rule Name	CreateUserLoginandDeleteUser
Rule	Detect a pattern where a user creates a User account followed by login by the same

Description	user followed by deletion of the User account.
Rule Code	<pre> @Name('NormalizedWindow') create window FilteredEvents.win:time (300 sec) (user String, ecactivity string, sessionid Long); @Name('UsersrcEvents') Insert into FilteredEvents select user_ src as user, ec_activity as ecactivity, sessionid from Event (ec_subject='User' and ec_activity in ('Create','Delete') and ec_theme in ('UserGroup', 'Authentication') and ec_ outcome='Success' and user_src is not null); @Name('UsrdstEvents') Insert into FilteredEvents select user_ dst as user, ec_activity as ecactivity, sessionid from Event(ec_subject='User' and ec_ activity in ('Logon') and ec_theme in ('UserGroup', 'Authentication') and ec_outcome='Success' and user_dst is not null); @Name('Pattern') @RSAAlert(oneInSeconds=0, identifiers={"user"}) select * from FilteredEvents match_recognize (partition by user measures C as c, L as l, D as d pattern (C L+D) define C as C.ecactivity= 'Create', L as L.ecactivity= 'Logon', D as D.ecactivity='Delete'); </pre>

EPL #5: Using Every @RSAAlert(identifiers={"user_src"})

Rule Name	CreateUserLoginandDeleteUser
Rule Description	Detect a pattern where a user creates a User account followed by login by the same user followed by deletion of the User account.
Rule Code	<pre> SELECT a.time as time,a.ip_src as ip_src,a.user_dst as user_ dst,a.ip_dst as ip_dst,a.alias_host as alias_host from pattern [every (a=Event (ec_subject='User' and ec_activity='Create' and ec_theme='UserGroup' and ec_outcome='Success') -> (Event(ec_ subject='User' and ec_activity='Logon' and ec_ theme='Authentication' and user_src=a.user_dst) -> b=Event(ec_ subject='User' and ec_activity='Delete' and ec_theme='UserGroup' and user_dst=a.user_dst))) where timer:within(300 sec)]; </pre>

Example #3:

Excessive login failures from same sourceIP

EPL #6: @RSAAlert(identifiers={"ip_src"})

Rule Name	ExcessLoginFailure
Rule	The same user tried logging in from the same Source IP and faced login failures

Description																																													
Rule Code	<pre>SELECT * FROM Event (ip_src IS NOT NULL AND ec_activity='Logon' AND ec_ outcome = 'Failure').std:groupwin(ip_src).win:time_ length_batch(300 sec, 10) GROUP BY ip_src HAVING COUNT(*) = 10;</pre>																																												
	<ul style="list-style-type: none">Creates window per ip_srcUses time_length_batch: Looks at events in batches(tumbling window). Every event will be part of only 1 window. Window releases events either when time elapses or count is reached.One of issues with tumbling windows that events occurring towards end of batch might not lead to an alert. <p>In below sequence of events at t=301 even though 10 login failures occurred for same login in last 300 secs there will be no alert because batch of events was dropped at t=300</p> <table><tr><th>Time t</th><th>Login Failures for Specific Users</th><th>Alert</th><th>Time Batch</th></tr><tr><td>0</td><td>0</td><td>0</td><td>1</td></tr><tr><td>295</td><td>6</td><td>0</td><td>1</td></tr><tr><td>299</td><td>3</td><td>0</td><td>1</td></tr><tr><td>301</td><td>1</td><td>0</td><td>2</td></tr><tr><td>420</td><td>6</td><td>0</td><td>2</td></tr><tr><td>550</td><td>3</td><td>0</td><td>2</td></tr><tr><td>600</td><td>0</td><td>0</td><td>3</td></tr><tr><td>720</td><td>6</td><td>0</td><td>3</td></tr><tr><td>850</td><td>3</td><td>0</td><td>3</td></tr><tr><td>900</td><td>1</td><td>1</td><td>3 ends and 4 begins</td></tr></table> <ul style="list-style-type: none">Above problem can be resolved using win:time windows (EPL#7)instead of win:time_length_batch windows.Outer group by is to control events when time elapses. Say you have 9 events at end of 60 secs, esper engine will push those 9 events to listener. Group by and count will restrict it since count is not equal to 10.Time and count can be modified as needed.	Time t	Login Failures for Specific Users	Alert	Time Batch	0	0	0	1	295	6	0	1	299	3	0	1	301	1	0	2	420	6	0	2	550	3	0	2	600	0	0	3	720	6	0	3	850	3	0	3	900	1	1	3 ends and 4 begins
Time t	Login Failures for Specific Users	Alert	Time Batch																																										
0	0	0	1																																										
295	6	0	1																																										
299	3	0	1																																										
301	1	0	2																																										
420	6	0	2																																										
550	3	0	2																																										
600	0	0	3																																										
720	6	0	3																																										
850	3	0	3																																										
900	1	1	3 ends and 4 begins																																										
Note																																													

EPL #7: @RSAAlert(identifiers={"ip_src"})

Rule Name	ExcessLoginFailure
Rule Description	The same user tried logging in from the same Source IP and faced login failures
Rule Code	<pre>SELECT * FROM Event (ip_src IS NOT NULL AND ec_activity='Logon' AND ec_outcome =</pre>

Note	<pre>'Failure').std:groupwin(ip_src).win:time (300 sec) GROUP BY ip_ src HAVING COUNT(*) = 10</pre>
	<ul style="list-style-type: none"> • This is sliding window and hence once alert is fired for a set of events they can be used for another alert as well till time has passed. • If 10 events were involved in causing alert only last event will appear • If < or > are used then you might see more than 1 alert. You should use alert suppression accordingly.

Example #4:

Multiple failed logins from multiple different users from same source to same destination, a single user from multiple different sources to same destination.

EPL #8: using groupwin , time_length_batch and unique

Rule Name	MultiplefailedLogins
Rule Description	<p>There are multiple failed logins for the following cases:</p> <ul style="list-style-type: none"> - From multiple users from same source to same destination. - Single user from multiple sources to the same destination.
Rule Code	<pre>SELECT * FROM Event(ec_activity='Logon' AND ec_outcome='Failure' AND ip_ src IS NOT NULL AND ip_dst IS NOT NULL AND user_dst IS NOT NULL).std:groupwin(ip_src,ip_dst).win:time_length_batch(300 seconds, 5)).std:unique(user_dst) group by ip_src,ip_dst having count(*) = 5;</pre>
Note	<ul style="list-style-type: none"> • ip.dst and ip.src are common across all events. • user_dst is unique for all events. • Alert is fired when there are atleast 5 different users try to login from same ip.src and ip.dst combination.

Example #5:

No Log traffic from a device in a given timeframe.

EPL #9: using groupwin , time_length_batch and unique

Rule Name	NoLogTraffic
Rule Description	There is no log traffic observed from a device in a given time frame.
Rule Code	<pre>SELECT * FROM pattern [every a = Event(device_ip IN ('10.0.0.0','10.0.0.1') AND medium = 32) -> (timer:interval (3600 seconds) AND NOT Event(device_ip = a.device_ip AND device_type = a.device_type AND medium = 32))];</pre>

Note	<ul style="list-style-type: none"> • Rule only detects sudden loss of traffic. It won't alert if there is no traffic to begin with. You need at least 1 event for rule to alert. • List of device ip address or device hostnames as input. Only these systems will be tracked. • Time input is required. Alert is fired when time interval between events exceeds input time.
------	--

Example #6:

Multiple Failed Logins NOT followed by a Lockout event by the same user.

EPL #10: using groupwin , time_length_batch and unique

Rule Name	FailedloginswoLockout
Rule Description	There are multiple failed logins that are not followed by Lockout event by the same user.
Rule Code	<pre>SELECT * FROM pattern [every-distinct(a.user_dst, a.device_ip, 1 msec) (a= Event(ec_activity='Logon' and ec_ outcome='Failure' and user_dst IS NOT NULL) -> [2](Event (device_ip =a.device_ip and ec_activity='Logon' and ec_ outcome='Failure' and user_dst=a.user_dst) AND NOT Event((ec_activity='Logon' and ec_ outcome='Success' and device_ip = a.device_ip and user_ dst=a.user_dst) or (ec_activity='Lockout' and device_ip = a.device_ip and user_dst=a.user_dst)))] where timer:within(60 seconds) -> (timer:interval(30 seconds) and not Event(device_ip=a.device_ip and user_ dst=a.user_dst and ec_activity='Lockout'))];</pre>
Note	<ul style="list-style-type: none"> • Above query detects the absence of a Lockout Event after the occurrence of 2 failed logins from same user. • The occurrence of the multiple failed logins are timed and are assumed to occur within a certain period of time. Also, in-practice the Lockout event is assumed to occur within a short time after the occurrence of the last failed login event because the threshold value of Failed logins per user is set in a given domain. • In current query, every distinct will suppress new thread for combination of user and device for 1 millisec. • Time allowed for 3 failed logins is 60 secs since 1st failed attempt. Wait period for lockout event to occur is 30 secs

Example #7:

Custom functions to perform LIKE and REGEX operations for ARRAY elements.

EPL #11: @RSAAlert(oneInSeconds=0)

Rule Name	MatchLikeRegex
Rule Description	There are custom functions to perform LIKE and REGEX comparisons of array meta keys.
Rule Code	<pre>SELECT * FROM pattern[e1=Event(matchLike(alias_host, "10.0.0.%")) AND e2=Event(matchRegex(alias_host, "10\.0\.0\.1[0-9][0-9]")) where timer:within(5 Minutes)];</pre>

Note:

1. "." in meta keys should be replaced with ("_").
2. All patterns should be time bound.
3. Use appropriate tags in front of statements, for example:
@RSAPersist:
@RSAAlert:

For additional details you can refer to:

- EPL Documentation: <http://www.espertech.com/esper/esper-documentation/>
- EPL Online Tool: <http://esper-epl-tryout.appspot.com/epltryout/mainform.html>

Working with Rules


This topic discusses additional procedures you can perform on rules. You may want to perform any of the following procedures:

- [Edit, Duplicate or Delete a Rule](#)
- [Filter or Search for Rules](#)
- [Import or Export Rules](#)


Edit, Duplicate or Delete a Rule


This topic provides instructions to edit, duplicate, or delete an Event Stream Analysis (ESA) rule. When you edit a rule, ESA applies the updated criteria going forward. No changes are made to previously generated alerts.

Edit a Rule

1. Go to **CONFIGURE > ESA Rules > Rules** tab.
The Rules tab is displayed.
2. In the **Rule Library**, select the rule you want to edit and click .
Depending on the rule type, the respective rule tab is displayed.
3. Modify the required parameters.
4. Click **Save**.

Duplicate a Rule


1. In the **Rule Library**, select the rule you want to duplicate and click .
2. The Duplicate a Rule dialog is displayed. The system adds **Copy of** in front of the rule name.

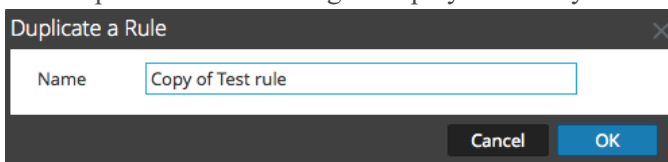


3. In the **Name** field, type a unique name for the duplicate rule and click **OK**.
A duplicate rule with the new name is added to the Rule Library.

Delete a Rule

1. Go to **CONFIGURE > ESA Rules > Rules**.
The Rules tab is displayed.

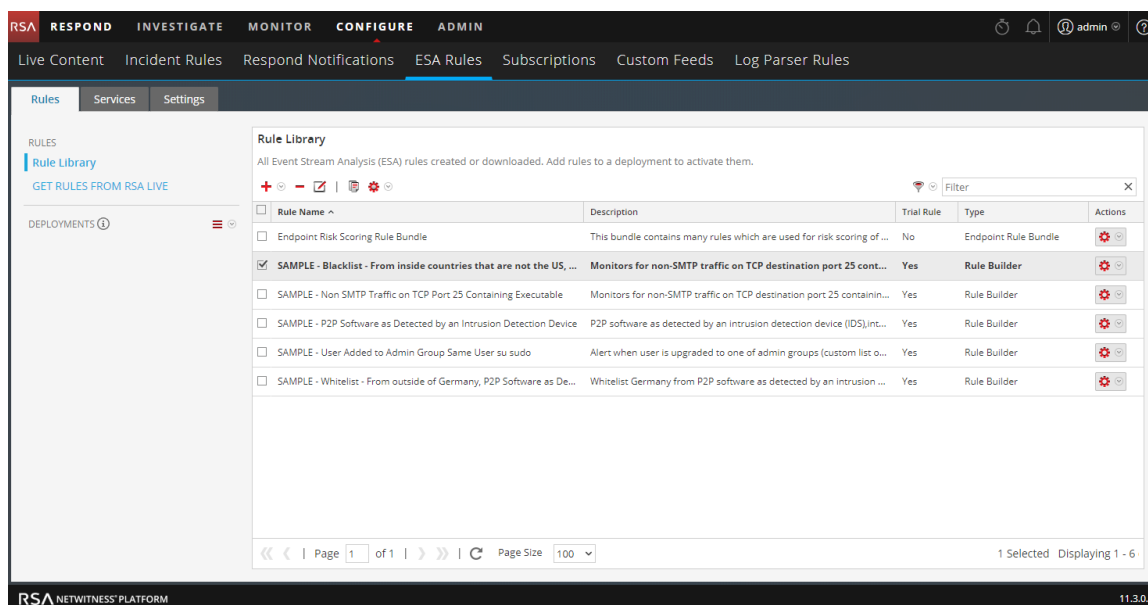

- In the Rule Library, select one or more rules and click . A warning dialog is displayed.
- Click **Yes**. A confirmation message that the rule is deleted successfully is displayed and the selected rule is deleted from the Rule Library.


Filter or Search for Rules


This topic shows analysts how to specify the type of rules that display in the Rule Library.

Prerequisites

Make sure that you understand the Rule Library view components. For more information, see [Rule Library Panel](#).

Filter Rules

- Go to **CONFIGURE > ESA Rules**. The Rules tab is displayed by default.
- In the **Rule Library** panel toolbar, click  and select the severity and type of rules that you would like to appear in the Rule Library list. The following figure shows the Filter drop-down list.

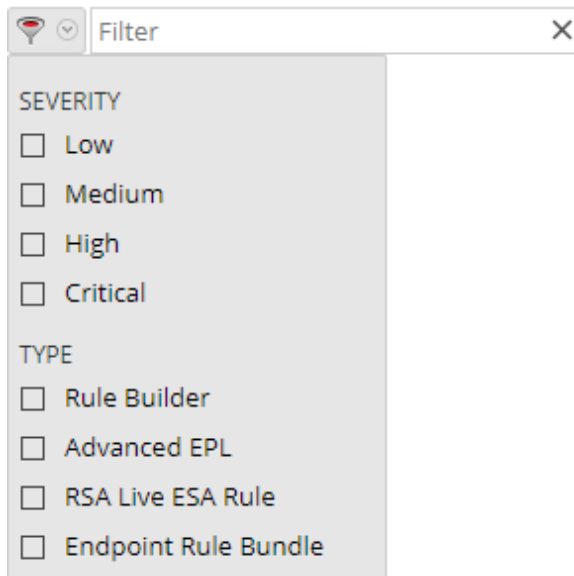

The selected rule types appear in the list.

Search for Rules

1. Go to **CONFIGURE > ESA Rules**.
The Rules tab is displayed by default.
2. In the **Rule Library** panel toolbar, type a rule name in the Filter field.
The Rule Library panel lists the rules that match the names entered in the Filter field.

Import or Export Rules


The topic provides instructions to import ESA rules from a NetWitness Platform instance and to export ESA rules to your hard drive so you can keep a local copy.


If you exported a rule in an earlier version of NetWitness Platform, the following conditions apply when you import the rule in version 10.5 or later:

- Exported in version 10.3 – You cannot import rules to version 10.5 or later.
- Exported in version 10.4 – You can import rules to version 10.5 or later.

Import ESA Rules

1. Go to **CONFIGURE > ESA Rules > Rules** tab.
The Rules tab is displayed.

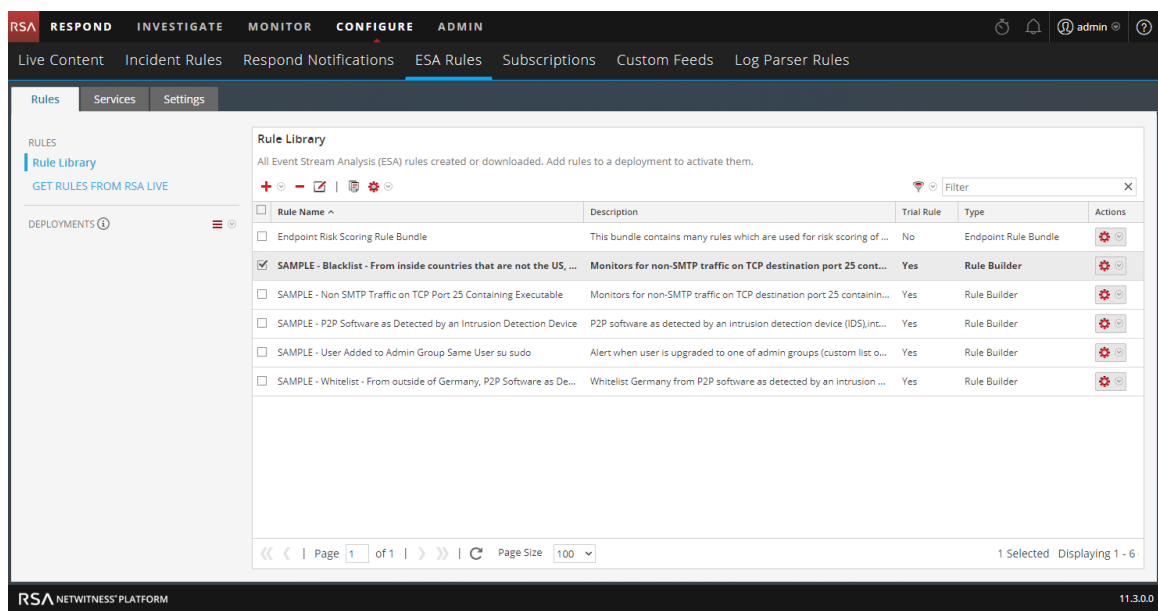


2. In the **Rules Library** toolbar, select  > **Import**.
The Import ESA Rules dialog is displayed.



3. Click **Browse** to browse and select the file containing the ESA rules.
4. Click **Import**.

Export ESA Rules

1. Select an ESA rule or multiple rules and select  > **Export** in the Rule Library toolbar.
A warning dialog is displayed.
2. Click **Yes**.
The Export Rules dialog is displayed.
3. In the **Enter File Name** field, type a filename for the file with the ESA rules and click **Export**.
The file is exported as a binary file to your machine.

Note: The binary file cannot be edited.

Choose How to be Notified of Alerts

This topic explains the different notification methods and how to add a notification method to a rule. Administrator, SOC Manager or DPO role permissions are required for all tasks in this section.

When a rule triggers an alert, ESA can send a notification in the following ways:

- Email
- Syslog
- Script

To configure a notification, you configure these components:

- **Notification Server:** The notification server is the source of the notifications. After you configure a notification server, you can add it to a rule. When the rule triggers an alert, the rule will use that server to send alert notifications.
- **Notifications:** These are the outputs (destinations) of the notifications, which can be email, script, and Syslog. When you design a rule, you can specify the notification for an alert.
- **Templates:** The message format of an alert notification is defined in a template.

If you use an ESA rule that has an enrichment, such as a Context Hub list, you must create a custom template. You can duplicate a default template and adjust it for your enrichment. For more information, see [Troubleshoot ESA Rules](#). For information on creating a custom template, see "Configure Meta Keys as Arrays in ESA Correlation Rules" in the *System Configuration Guide*.

Go to the [Master Table of Contents](#) to find all NetWitness Platform Logs & Network 11.x documents.

Note: ESA SNMP notifications are not supported for NetWitness Platform 11.3 and later.

Alert suppression and alert rate regulation are two features that Event Stream Analysis provides. Alert suppression ensures that multiple emails are not sent out for the same alert. For example, consider a rule to detect failed user logins. If you set the alert suppression to three minutes, you will see only the alerts generated in that time frame. This is fewer than the number of alerts you would see without alert suppression. Some alerts can be duplicates. With alert suppression, emails are not sent for duplicate alerts. This ensures the inbox is not flooded with redundant alert notifications.

Alert rate regulation is a preventive measure to ensure that alerts from misconstrued rules do not flood the system. This ensures that ESA does not send more than the configured limit of emails within one minute.

Notification servers, notifications, and templates are configured in the Administration System view. For more information, see "Configure Notification Servers", "Configure Notification Outputs", and "Configure Templates for Notifications" in the *System Configuration Guide*.

Notification Methods

When a rule triggers an alert, ESA can send a notification in the following ways:

- Email
- Syslog
- Script

Note: ESA SNMP notifications are not supported for NetWitness Platform 11.3 and later.

Email Notifications

ESA Correlation can send notifications to users through email about various system events.

To configure these email notifications, you need to:

- Configure the SMTP email server as an output provider. For instructions, see "Configure the Email Settings as Notification Server" in the *System Configuration Guide*.
- Set up an email account to receive notifications. For instructions, see "Configure Email as a Notification" in the *System Configuration Guide*.
- Configure a template for email notification. For instructions, see "Configure Global Notifications Templates" in the *System Configuration Guide*.

Syslog

Event Stream Analysis can send events and consolidate logs in Syslog format to a Syslog server.

To configure these Syslog notifications, you need to:

- Configure Syslog server settings as an output provider. For instructions, see "Configure a Syslog Notification Server" in the *System Configuration Guide*.
- Configure Syslog message format as an output action. For instructions, see "Configure Syslog as a Notification" in the *System Configuration Guide*.
- Configure a template for Syslog. For instructions, see "Configure Global Notifications Templates" in the *System Configuration Guide*.

Script Alerter

Apart from the alert notifications ESA allows users to run scripts in response to ESA alerts.

Scripts enable you to do custom integration with applications that exist in your environment. For example, if you want to open an incident ticket from an application when a specific alert is triggered, Script Alerter lets you write a script that calls the application API and has ESA invoke it when the specific ESA rule is triggered. You can configure a FreeMarker template to define what details you want to extract from the output of the ESA rule and pass it as command line arguments to the script.

To use the Script Alert, you need to:

- Configure the user identity and other details that are required to execute the script. For instructions, see "Configure Script as a Notification Server" in the *System Configuration Guide*.
- Define the Script. For instructions, see "Configure Script as a Notification" in the *System Configuration Guide*.

- Configure a template for the script. For instructions, see "Configure Global Notifications Templates" in the *System Configuration Guide*.

Add Notification Method to a Rule

This topic tells administrators how to add a notification, such as email, to a rule. ESA uses the notification method when it generates an alert for an event that meets rule criteria.

You add a notification to a rule so ESA can let you know when a rule triggers an alert. Although the notification fields are not required, it is a best practice to add a notification to a rule.

When you add a notification method to a rule, you select the following information:



- Output
- Notification
- Notification Server
- Template


Prerequisites

- Your role must have permission to manage rules.
- The rule must exist.
- The notification method must be configured with a supported server and template:
Go to **ADMIN > System > Global Notifications**.

For detailed procedures, see the *System Configuration Guide*.


Add a Notification Method to a Rule

1. Go to **CONFIGURE > ESA Rules > Rules** tab.
2. In the **Rule Library**, click  to add a new rule or select an existing rule and click . Depending on the rule type, the Rule Builder or Advanced EPL tab is displayed. The Notifications section is the same for both tabs.

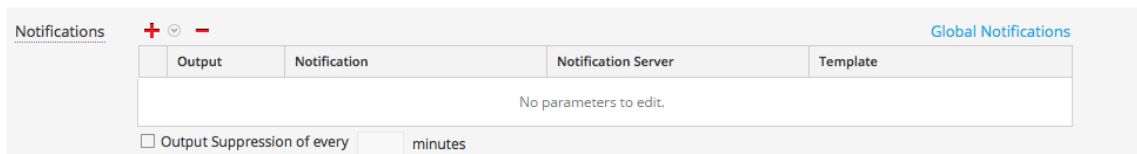

Output	Notification	Notification Server	Template
No parameters to edit.			

☐ Output Suppression of every minutes

3. Click  and select the **Output** for the alert:
 - Email
 - SNMP (This option is not supported in NetWitness Platform 11.3 and later.)

- Syslog
 - Script
4. Double-click the **Notification** field and select the name of a previously configured output.
For example, Level 1 Analyst could be the name of an email notification that goes to the L1-Analysts email distribution group.
 5. Double-click the **Notification Server** field and select the server that sends the notification.
 6. Double-click the **Template** field and select a format for the alert.
- The following figure shows the settings for a Syslog notification.

The screenshot shows a 'Notifications' configuration window. At the top left is the title 'Notifications' with a red plus icon, a grey minus icon, and a blue minus icon. At the top right is a link 'Global Notifications'. Below the title bar is a table with four columns: 'Output', 'Notification', 'Notification Server', and 'Template'. The first row of the table has a checked checkbox in the 'Output' column, followed by 'SYSLOG' in the 'Output' column, 'Local_SysLog' in the 'Notification' column, 'localhost-514' in the 'Notification Server' column, and 'Default Syslog Template' in the 'Template' column. Below the table is a checkbox labeled 'Output Suppression of every' followed by a text input field and the word 'minutes'.

Output	Notification	Notification Server	Template
<input checked="" type="checkbox"/> SYSLOG	Local_SysLog	localhost-514	Default Syslog Template


☐ Output Suppression of every minutes

7. If you want to specify frequency, select **Output Suppression**, then enter the number of **minutes**.
 8. If you want to add another notification, repeat steps 3-7.
 9. Click **Save**.
- When ESA generates an alert for an event that matches the rule criteria, you will be notified of the alert via each notification method added to the rule.

Add a Data Enrichment Source

This topic tells how to add a previously configured enrichment source to a rule. When ESA creates an alert, information from the source gets included in it.

Enrichments provide the ability to include contextual information into correlation logic and alert output. Without enrichments, all information included in an ESA alert is from a Core service. With enrichments, you can request for look ups into a variety of sources and include the results into the outgoing alerts. The following figure illustrates the enrichment feature.

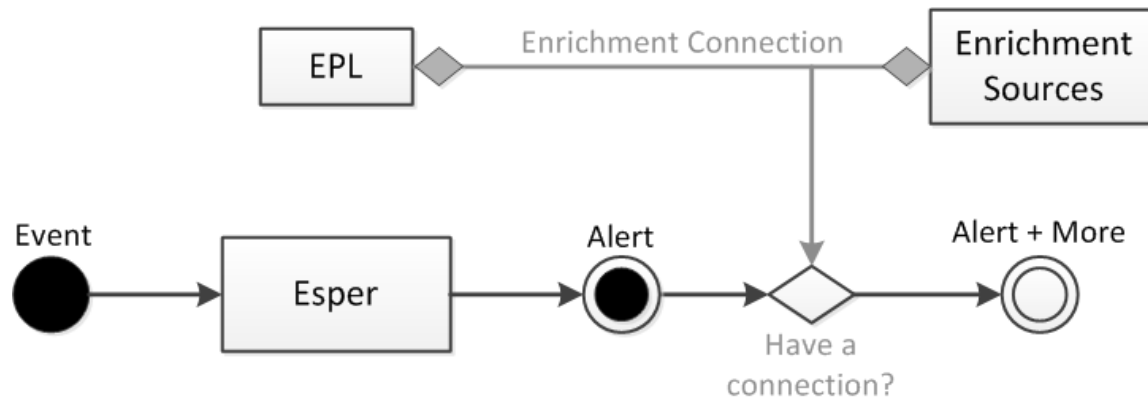

Enrichment configuration is made up of two logical units:

- Enrichment Sources – These are data stores of contextual information.
- Enrichment Connections – These act as connectors between alert meta and source columns.

ESA allows you to make connections between Event Processing Language (EPL) statements and enrichment sources. Once the connections are established, the system joins the selected fields from the alert output with the information in the sources and uses the matching data to enrich the alert that is sent out. ESA can connect with the following sources:

- Esper Named Windows
- MaxMindGeoIP Database

Note: The geoIP enrichment source can neither be created nor deleted. It is provided out of the box to the user.

Sample Rule with Enrichment

The following sample rule illustrates the enrichment feature provided by ESA:

```
@RSAAlert @Name("simple") SELECT * FROM CoreEvent(ec_theme='Login Failure')
```

The rule generates an alert for every logon failure and thus if the following (simplified) event stream is received at ESA:

sessionid	ec_theme	username	ip_src	ip_dst	host_dst
1	Login Success	dshrute	23.xx.23x.16		
2	Login Failure	jhalpert	23.xx.23x.16	31.1x.x9.1x8	www.facebook.com

An alert with the following constituent events might be generated in response to the second session:

```
{
  "events": [
    {
      "username": "jhalpert",
      "host_dst": "www.facebook.com",
      "ip_dst": "31.1x.x9.1x8",
      "sessionid": 2,
      "ec_theme": "Login Failure",
      "esa_time": 1406148964130,
      "ip_src": "23.xx.23x.16"
    }
  ]
}
```

The JSON output shows all the information available for inclusion into an ESA notification using an appropriate FreeMarker template. For instance, the template expression `${events[0].username}` would evaluate to `jhalpert`.

With enrichments, the same module, with the same event stream, can generate the alert shown below. The system can make multiple enrichment connections and pull contextual data to make the alert more meaningful.

For example:

`${events[0]["RSADataScienceLookup"][0].score}` gives the “**risk**” score of the destination domain computed by the RSA Warehouse Analytics module while `${events[0]["orgchart"][0].supervisor}` gives the name of the supervisor of the employee that the alert pertains to (pulled from an HR database) and `${events[0]["LoginRegister"][0].username}` gives the name of the user with the last successful logon from the same `ip_src` (using a stream based Named Window).

```
{ "events": [
  {
    "username": "jhalpert",
    "host_dst": "www.facebook.com",
    "GeoIpLookup": [
      {
        "city": "Cambridge",
        "longitude": -71,
        "countryCode": "US",
        "areaCode": 617,
        "metroCode": 506,
        "region": "MA",
        "dmaCode": 506,
        "ipv4Obj": "/23.62.236.16",
        "countryName": "United States",
        "postalCode": "02142",
        "ipv4": "23.62.236.16",
        "latitude": 42,
        "organization": "Verizon Business"
      }
    ],
    "RSADataScienceLookup": [
      {
        "model_id": "suspiciousDomains_1",
```

```

        "_id": "EXEC_BATCH_1_20140630153740_facebook.com",
        "score": 10,
        "key": "www.facebook.com"
    },
    ],
    "orgchart": [
        {
            "supervisor": "mscott",
            "name": "James Halpert",
            "extension": 3692,
            "location": "Scranton",
            "department": "Sales",
            "id": "jhalpert"
        }
    ],
    "ip_dst": "31.13.69.128",
    "sessionid": 2,
    "LoginRegister": [
        {
            "username": "dshrute",
            "ip_src": "23.62.236.16"
        }
    ],
    "ec_theme": "Login Failure",
    "esa_time": 1406155218912,
    "ip_src": "23.62.236.16"
}
]]

```

Enrichment Sources

This topic explains options for adding an external data source to provide additional information in alerts. Enrichment sources provide additional information in alerts. For example, an in-memory table can provide a full name, title, office location, and employee number if a user matches rule criteria. The following types of enrichment sources are available:

- Context Hub List (Preferred)
- In-Memory Table
- GeoIP

Note: Database, Database Connection, and Warehouse Analytics as enrichment sources are not supported for the ESA Correlation service in NetWitness Platform 11.3 and later.

RSA recommends that you use Context Hub List enrichment sources instead of In-Memory Table enrichment sources. You can share Context Hub List enrichment sources across the NetWitness Platform. You can only use the In-Memory Table with ESA.

Note: The geoIP enrichment source can neither be created nor deleted. It is provided out of the box to the user.

Configure In-Memory Table as an Enrichment Source


This topic provides instructions on how to configure an in-memory table. When you configure an in-memory table, you upload a .CSV file as an input to the table. You can associate this table with a rule as an enrichment source. When the associated rule generates an alert, ESA will enrich the alert with relevant information from the in-memory table.

For example, a rule could be configured to detect when a user tries to download freeware and to identify the person by user ID in the alert. The alert could be enriched with additional information from an in-memory table that contains details such as full name, title, office location and employee number.

Prerequisites

- The column name in the .CSV file cannot have whitespace characters.
For example *Last_Name* is correct, and *Last Name* is incorrect.
- The .CSV file must begin with a header line that defines fields and types.
For example, *address string* would define the header field as *address*, and the type as *string*.

The following shows a valid .CSV file represented as a .CSV and as a table.

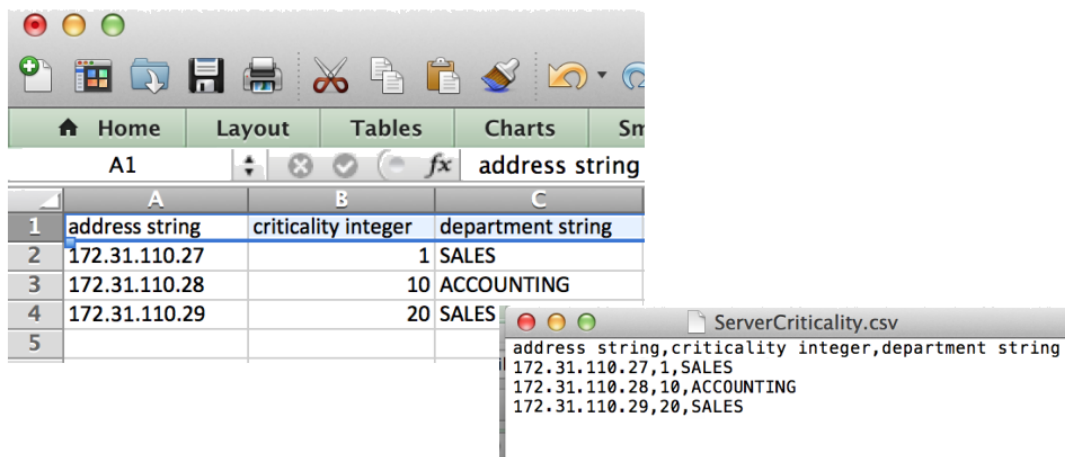

The screenshot shows a software interface with a table and a CSV file preview. The table has columns A, B, and C. The CSV file preview shows the same data in a text format.

	A	B	C
1	address string	criticality integer	department string
2	172.31.110.27	1	SALES
3	172.31.110.28	10	ACCOUNTING
4	172.31.110.29	20	SALES
5			

ServerCriticality.csv

```
address string,criticality integer,department string
172.31.110.27,1,SALES
172.31.110.28,10,ACCOUNTING
172.31.110.29,20,SALES
```

Configure an Ad hoc In-Memory Table

- Go to **CONFIGURE > ESA Rules**.
The Configure view is displayed with the ESA Rules tab open.
- Click the **Settings** tab.


3. In the options panel, select **Enrichment Sources**.

The screenshot displays the RSA NetWitness Platform configuration interface. The top navigation bar includes tabs for RESPOND, INVESTIGATE, MONITOR, CONFIGURE, and ADMIN. The CONFIGURE tab is active, and the left sidebar shows the 'Enrichment Sources' option under the 'Settings' section. The main content area is titled 'Enrichment Sources' and contains a table with the following data:

Enabled	Name	Type	Description	Last Modified	Actions
<input type="checkbox"/>	Default GeoIP	GeoIP	Default Geo IP Enrichment Source. This cannot be edited.	2018-09-12 15:04:59	

At the bottom of the interface, the footer shows 'RSA NETWITNESS PLATFORM' on the left and '11.3.0.0' on the right.

4. In the **Enrichment Sources** section, click  > **In-Memory Table**.

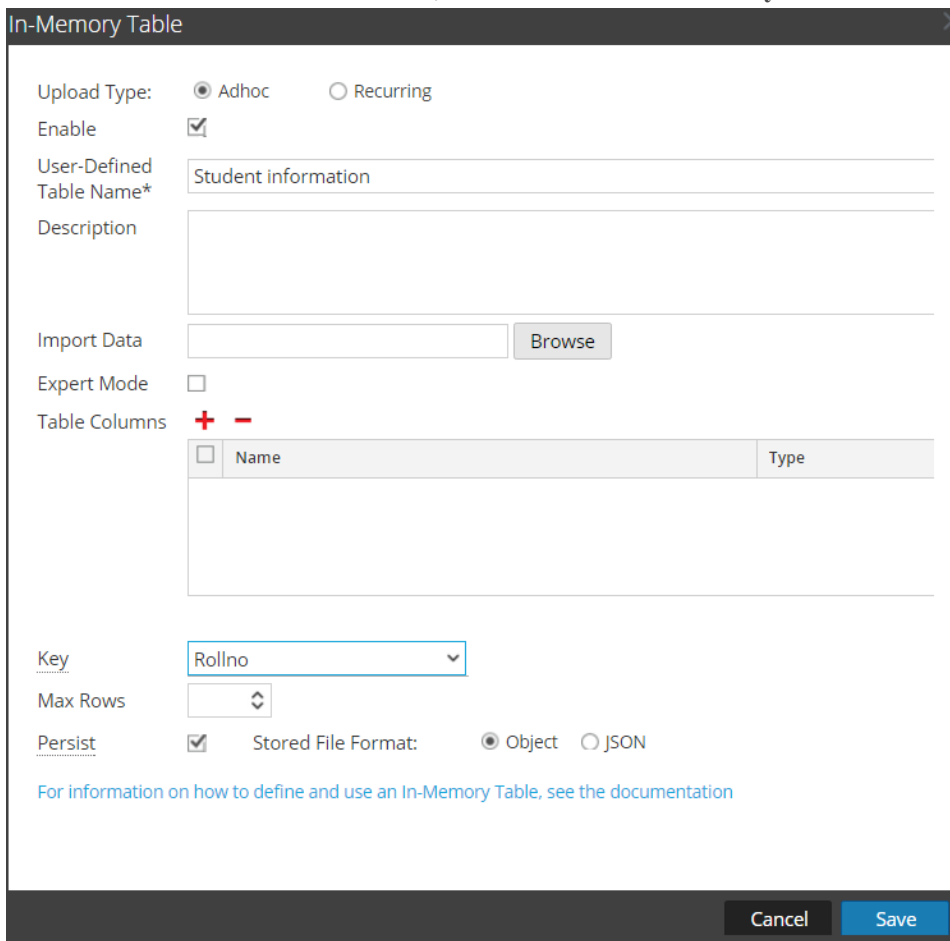

The screenshot shows the 'In-Memory Table' configuration window. It includes the following fields and controls:

- Upload Type:** Radio buttons for 'Adhoc' (selected) and 'Recurring'.
- Enable:** A checked checkbox.
- User-Defined Table Name*:** A text field containing 'Student information'.
- Description:** A large empty text area.
- Import Data:** A text field and a 'Browse' button.
- Expert Mode:** An unchecked checkbox.
- Table Columns:** A table with a '+' and '-' icon above it. The table has two columns: 'Name' and 'Type'. The 'Name' column has a checkbox next to it.
- Key:** A dropdown menu showing 'Rollno'.
- Max Rows:** A spinner control.
- Persist:** A checked checkbox.
- Stored File Format:** Radio buttons for 'Object' (selected) and 'JSON'.
- A link: [For information on how to define and use an In-Memory Table, see the documentation](#)
- Buttons:** 'Cancel' and 'Save' at the bottom right.

5. Describe the in-memory table:
- Select **Ad hoc**.
 - By default, **Enable** is selected. When you add the in-memory table to a rule, alerts will be enriched with data from it.
If you add an in-memory table to a rule but do not want alerts to be enriched, deselect the checkbox.
 - In the **User-Defined Table Name** field, type a name, such as Student Information, for the in-memory table configuration.
 - If you want to explain what the enrichment adds to an alert, type a **Description** such as:
When an alert is grouped by Rollno, this enrichment adds student information, such as name and marks.
6. In the **Import Data** field, select the .CSV file that will feed data to the in-memory table.
7. If you want to write an EPL query to define an advanced in-memory table configuration, select **Expert Mode**.
The Table Columns are replaced by a **Query** field.

8. In the **Table Columns** section, click **+** to add columns to the in-memory table.
9. If a valid file is selected in the Import Data field, the columns populate automatically.

Note: If you selected Expert mode, a Query field is displayed instead of Table Columns.

10. In the **Key** drop-down menu, select the field to use as the default key to join incoming events with the in-memory table when using a CSV-based in-memory table as an enrichment. By default, the first column is selected. You can also later modify the key when you open the in-memory table in enrichment sources.
11. In **Max Rows** drop-down menu, select the number of maximum number of rows that can reside in the in-memory table at a particular instance.
12. Select **Persist** to preserve the in-memory table on disk when the ESA service stops and to re-populate the table when the service restarts.
13. In **Stored File Format** field, do one of the following:
 - Select **Object**, if you want to store the file in a binary format.
 - Select **JSON**, if you want to store the file in a text format.
 By default, **Object** is selected.

14. Click **Save**.

The adhoc in-memory table is configured. You can add it to rule as an enrichment or part of the rule condition. See [Add an Enrichment to a Rule](#).

When you add an in-memory table, you can add it to a rule as an enrichment or as a part of the rule condition. For example, the following rule uses an in-memory table as a part of the rule condition to create a whitelist, and it also uses an in-memory table of details in the user_dst file to enrich the alert that is displayed.

The rule shows the in-memory table as a whitelist rule condition:

The screenshot shows the 'Build a Statement' dialog box. The title bar says 'Build a Statement'. Below the title bar, there is a text area with instructions: 'Define a rule condition by adding one or more statements. For each statement, define the keys, operators, and values that will trigger the rule. If the contents of the value field include more than one value, you must specify that it should be evaluated as an array.' Below this, there is a 'Name *' field with the value 'User_dst details'. Below the name field, there is a dropdown menu with the text 'if all conditions are met' and a '+' icon. Below the dropdown, there is a table with columns: 'Key', 'Operator', 'Value', 'Ignore Case?', and 'Array?'. The table has three rows: 1) 'event.user_dst' with operator 'is not null', 'Ignore Case?' unchecked, and 'Array?' unchecked. 2) 'whitelist.User_list' with operator 'is', 'Ignore Case?' unchecked, and 'Array?' unchecked. 3) 'Username' with operator 'is', 'Value' 'event.user_dst', 'Ignore Case?' checked, and 'Array?' unchecked. The third row is highlighted with a red border. Below the table, there is a text area with instructions: 'Whitelist conditions can be added to exclude only those items defined in an enrichment list. Map a list column to an event meta key to join the list to the incoming data stream.' At the bottom right, there are 'Cancel' and 'Save' buttons.

Key	Operator	Value	Ignore Case?	Array?
<input type="checkbox"/> event.user_dst	is not null		<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/> whitelist.User_list	is		<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/> Username	is	event.user_dst	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Next, the alert is enriched with the User_list in-memory table:

Enrichments + -				Settings
Output	Enrichment Source	ESA Event Stream Meta	Enrichment Source Column Name	
<input checked="" type="checkbox"/> In-Memory Table	User_list	user_dst	Username	

Therefore, the user_dst in-memory table is used to create a whitelist, and it is also used to enrich the data in the alert if the alert is triggered.

Add a Recurring in-Memory Table

- Go to **CONFIGURE > ESA Rules**.
The Configure view is displayed with the ESA Rules tab open.
- Click the **Settings** tab.
- In the options panel, select **Enrichment Sources**.
- Click + ⌵ > **In-Memory Table**.
- Describe the in-memory table:
 - Click **Recurring**.
 - By default, **Enable** is selected. When you add the in-memory table to a rule, alerts will be enriched with data from it.
If you add an in-memory table to a rule but do not want alerts to be enriched, deselect the checkbox.
 - In the **User-Defined Table Name** field, type a name, such as Student Information, for the in-memory table configuration.
 - If you want to explain what the enrichment adds to an alert, type a **Description** such as:
When an alert is grouped by Rollno, this enrichment adds student information, such as name and marks.
- Type the URL of the .CSV file that will feed data to the in-memory table. Click Verify to validate the link and populate the columns in the .CSV file. You can add or remove columns using the plus or minus button.
- If the server is configured behind another server, select **Use Proxy**.
- If the server requires logon credentials, select **Authenticated**.
- For **Recur Every**, indicate how frequently ESA must check for the most recent .CSV:
 - Select Minute(s), Hour(s), Day(s), or Week.
 - If you select Week, select a day of the week.
 - Click **Date Range** to select a **Start Date** and **End Date** for the recurring schedule.
- In the **Key** drop-down menu, select the field to use as the default key to join incoming events with the in-memory table when using a CSV-based in-memory table as an enrichment. By default, the first

⌵ Date Range

Start Date

End Date

column is selected. You can also later modify the key when you open the in-memory table in enrichment sources.

11. In **Max Rows** drop-down menu, select the number of rows that can reside in the in-memory table at a particular instance.
12. Select **Persist** to preserve the in-memory table on disk when the ESA service stops and to re-populate the table when the service restarts.
13. In **Stored File Format** field, do one of the following:
 - Select **Object**, if you want to store the file in a binary format.
 - Select **JSON**, if you want to store the file in a text format.By default, **Object** is selected.
14. Click **Save**.

The recurring in-memory table is configured. You can add it to rule as an enrichment or part of the rule condition. See [Add an Enrichment to a Rule](#).


Configuring an Esper Query as an Enrichment Source

When you use "expert mode," you can create an enrichment source or named window based on an Esper query. This allows you to have more control over the content and create more dynamic content. When you do this, an EPL query constructs the named window to capture interesting state from event stream.

Workflow

The following shows the workflow for creating a query using a named window:

1. The event is sent to the Esper Engine.
2. An EPL query is generated.
3. An alert is triggered.
4. The query checks to see if there is a connection between the event and the Named Window.
5. If there is a connection, the query that populates the Named Window is run and populated.
6. The content from the Named Window is added to the alert content and sent or displayed (depending on your settings).

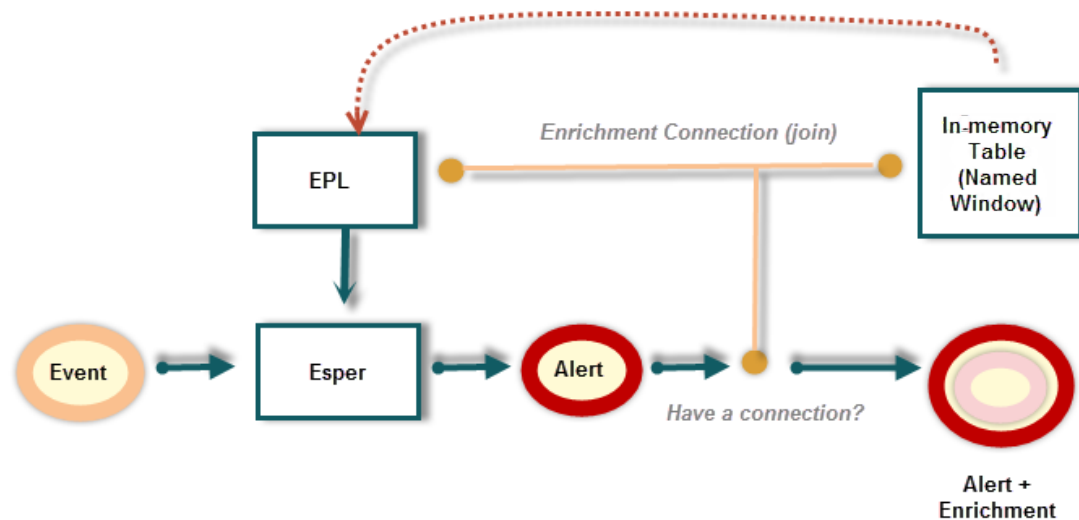


Prerequisites

- The meta used in the EPL statement must exist in the data.
- You must create well-formed EPL statements.

Configure an In-Memory Table Using an EPL Query

1. Go to **CONFIGURE > ESA Rules**.
The Configure view is displayed with the Rules tab open.
2. Click the **Settings** tab.
3. In the options panel, select **Enrichment Sources**.

4. In the **Enrichment Sources** section, click  > **In-Memory Table**.

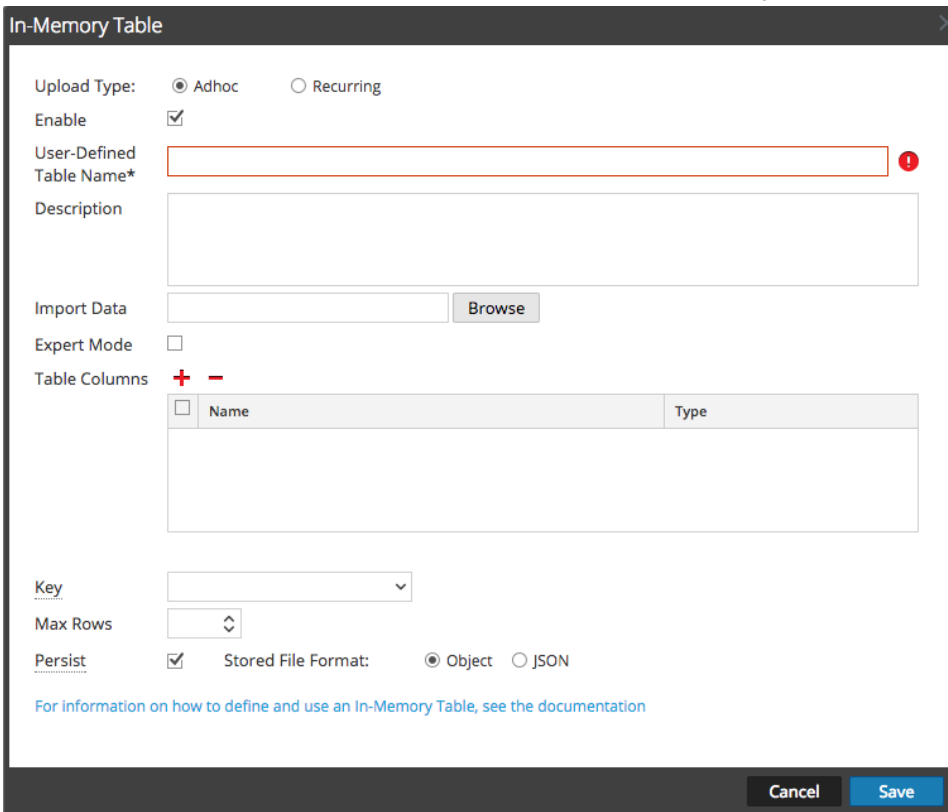

In-Memory Table

Upload Type: ☒ Adhoc ☐ Recurring



Enable ☒

User-Defined Table Name*

Description

Import Data

Expert Mode ☐

Table Columns  

<input type="checkbox"/>	Name	Type

Key

Max Rows

Persist ☒ Stored File Format: ☒ Object ☐ JSON

[For information on how to define and use an In-Memory Table, see the documentation](#)

5. Select **Adhoc**.
By default, Enable is selected. When you add the in-memory table to a rule, alerts will be enriched with data from it.
6. In the **User-Defined Table Name** field, type a descriptive name to describe the in-memory table.
7. If you want to explain what the enrichment adds to an alert, enter information in the **Description** field.
This description displays when you view the list of enrichments from the Enrichment Sources view, so it's a good idea to enter a thorough description as a best practice. Doing this allows other users to understand the content of the enrichment without opening it to examine its contents.
8. Select **Expert Mode** to define an advanced in-memory table configuration by writing an EPL query. The Table Columns are replaced by a **Query** field.
9. Select **Persist** to preserve the in-memory table on disk when the ESA service stops and to re-populate the table when the service restarts.
10. Enter the EPL query in the **Query** field. The query should be well-formed, and it's a good idea to test it before entering it in the field.
11. Click **Save**.

Example

For example, you created a rule that searches for five failed attempted logins followed by a successful login. When that rule is triggered, you may want the notification to contain information about the last user logged into the system when this successful login occurred. To add this enrichment to the notification, you might choose to create a stream-based in-memory lookup table that is populated from incoming events to maintain a mapping of IP addresses to the last user logged in from that address. To do this, you create an enrichment using a query as your source.

Step 1: Create Your Rule

First, you need to create your correlation rule. In this case, you create failure and success rule conditions, and group by the `ip_src`.

Rule Condition	Description
Failures	This condition searches for five failed logins with a "followed by" connector, meaning that the condition (Failures) must be followed by the next condition (Success).
Success	This condition searches for one successful login.
GroupBy: <code>ip_src</code> , device class	The GroupBy field ensures that all the previous conditions are grouped by the <code>ip_src</code> and device class. This is important to the construction of the rule because the rule attempts to find a case where a user has attempted to log into the same destination account multiple times, and finally logged in successfully. Grouping by device class ensures that the user logged in from the same machine attempted to log into an account multiple times. The rule may give unexpected results if you do not group the results.
Occurs within 5 minutes	The time window for the events to occur is five minutes. If the events occur outside of this time window, the rule does not trigger.
Event Sequence: Strict	The event sequence is configured for a strict pattern match. This means that the pattern must match exactly as it is specified with no intervening events.

For the rule conditions, you create the following statements:

- The "Failures" statement searches for failed login attempts:

Build a Statement

Define a rule condition by adding one or more statements. For each statement, define the keys, operators, and values that will trigger the rule. If the contents of the value field include more than one value, you must specify that it should be evaluated as an array.

Name * Failures

if all conditions are met

	Key	Operator	Value	Ignore Case?	Array?
<input type="checkbox"/>	event.ec_activity	is	Logon	<input checked="" type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	event.ec_outcome	is	Failure	<input checked="" type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	event.user_dst	is not null		<input type="checkbox"/>	<input type="checkbox"/>

Cancel Save

- The "Success" statement searches for one successful login:

Build a Statement

Define a rule condition by adding one or more statements. For each statement, define the keys, operators, and values that will trigger the rule. If the contents of the value field include more than one value, you must specify that it should be evaluated as an array.

Name * Success

if all conditions are met

	Key	Operator	Value	Ignore Case?	Array?
<input type="checkbox"/>	event.ec_activity	is	Logon	<input checked="" type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	event.ec_outcome	is	Success	<input checked="" type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/>	event.user_dst	is not null		<input type="checkbox"/>	<input type="checkbox"/>

Cancel Save

- Combined, you have the following correlation rule:

Rules
Services
Settings
Login_Failure_Followed_by...

Rule Builder

Build a rule using drag-and-drop and auto-complete tools.

Rule Name * Login_Failure_Followed_by_Success

Description Three failed attempted logins in followed by a successful login.

Trial Rule ☒

Severity * Low

Conditions * [Investigation](#)

Statement	Occurs	Connector	Correlation Type	Meta	Meta
<input type="checkbox"/> Failures	5	followed by	SAME	user_dst	
<input checked="" type="checkbox"/> Success	1				

Group By user_dst device_class

Occurs Within 10 minutes Event Sequence ☐ Strict ☐ Loose

Notifications [Global Notifications](#)

Output	Notification	Notification Server	Template
No parameters to edit.			

☐ Output Suppression of every minutes

Enrichments [Settings](#)

Output	Enrichment Source	ESA Event Stream Meta	Enrichment Source Column Name
No parameters to edit.			

Debug ☒

Step 2: Create the Enrichment

Now that you have created your rule, you need to create the enrichment to add to the notification output. Follow the steps above to create the enrichment, name it *Last_Logon*, and add the following query:

```
create window LastLogon.std:unique(ip_src) as (ip_src string, user_dst string);
```

```
insert into LastLogon select ip_src, user_dst from CoreEvent
where ec_activity='Logon' and ec_outcome='Success';
```

The enrichment should look like the following:

In-Memory Table

Upload Type:

☒ Adhoc ☐ Recurring

Enable

☒

User-Defined Table Name*

Last_Logon

Description

This stream-based in-memory lookup table is populated from incoming events. It maintains a mapping of IP addresses to the last user logged in from that address.

Import Data

Browse

Expert Mode

☒

Query*

create window LastLogon.std:unique(ip_src) as (ip_src string, user_dst string);
insert into LastLogon select ip_src, user_dst from CoreEvent
where ec_activity='Logon' and ec_outcome='Success';

For information on how to define and use an In-Memory Table, see the documentation

Cancel

Save

Step 3: Add the Enrichment to the Rule

Now that you have created your basic rule and your enrichment, you'll need to add the enrichment to the rule and join (or connect) the enrichment to the meta in the rule.

Open the `Login_Failure_Followed_by_Success` rule for editing.

Rules
Services
Settings
Login_Failure_Followed_by...

Rule Builder

Build a rule using drag-and-drop and auto-complete tools.

Rule Name * Login_Failure_Followed_by_Success

Description Three failed attempted logins in followed by a successful login.

Trial Rule ☒

Severity * Low

Conditions * + - [Investigation](#)

Statement	Occurs	Connector	Correlation Type	Meta	Meta
<input type="checkbox"/> Failures	5	followed by	SAME	user_dst	
<input checked="" type="checkbox"/> Success	1				

Group By user_dst device_class

Occurs Within 10 minutes Event Sequence ☐ Strict ☐ Loose

Notifications + - [Global Notifications](#)

Output	Notification	Notification Server	Template
No parameters to edit.			

☐ Output Suppression of every minutes

Enrichments + - [Settings](#)

Output	Enrichment Source	ESA Event Stream Meta	Enrichment Source Column Name
<input checked="" type="checkbox"/> In-Memory Table	Last_Logon	ip_src	ip_src

Debug ☒

Field	Enter	Description
Output	In-Memory Table	The In Memory Table option creates a Named Window, which can be populated with the EPL query data.
Enrichment Source	Last_Logon (the enrichment you created above).	This is the stream-based in-memory lookup table that is populated from incoming events to maintain a mapping of IP addresses to the last user logged in from that address.
ESA Event Stream Meta	ip_src	This is an event stream meta that you can join to the enrichment data you are populating. Essentially, ip_src is the join condition .
Enrichment Source Column Name	ip_src	This is the meta from the enrichment that you can join to the event stream data. It must be the same as join condition from the Event Stream Meta field.

Once you have added the enrichment, you can save the rule.

When the rule is triggered, the ESA runs the query in the enrichment and populates the Named Window with the data. If the data in the Named Window matches the join condition, the data is added to the output you can view in Email, Syslog or Script, depending on how you configured notifications.

Configure Context Hub List as an Enrichment Source

Note: The information in this topic applies to RSA NetWitness® Platform Version 11.1 and later.

This topic provides instructions on how to configure a Context Hub list as an enrichment source for ESA. Once a Context Hub list is added as an enrichment source, analysts can use the configured list as a statement condition when creating an ESA rule. Any changes made to the list from within Context Hub are automatically reflected in the enrichment source in real-time. For example, you could create a list of IP addresses in Context Hub and then use that list as either a blacklist or whitelist as part of a correlation rule condition. Any subsequent changes made to the IP list in Context Hub will be reflected in the enrichment source in real-time, to ensure the correlation rule operates with a constantly updating set of information.

Prerequisites


Before configuring a Context Hub list as an enrichment source, the list must first be created as a data source in Context Hub. Any list created in Context Hub is supported and the lists may contain string or numeric values, including IP addresses. For information on creating a list as a data source in Context Hub, see the *RSA NetWitness Context Hub Configuration Guide*.

Caution: When creating a Context Hub list for use as an enrichment source, the list name and its field names cannot include any spaces or special characters, or start with a number. If you do not follow this naming convention, when you attempt to add the list as an enrichment source in ESA, an error message will be displayed and you will not be allowed to add the list.

Configure a Context Hub List as an Enrichment Source

1. Go to **CONFIGURE > ESA Rules > Settings** tab.
2. In the options panel, select **Enrichment Sources**.

The Enrichment Sources panel is displayed.

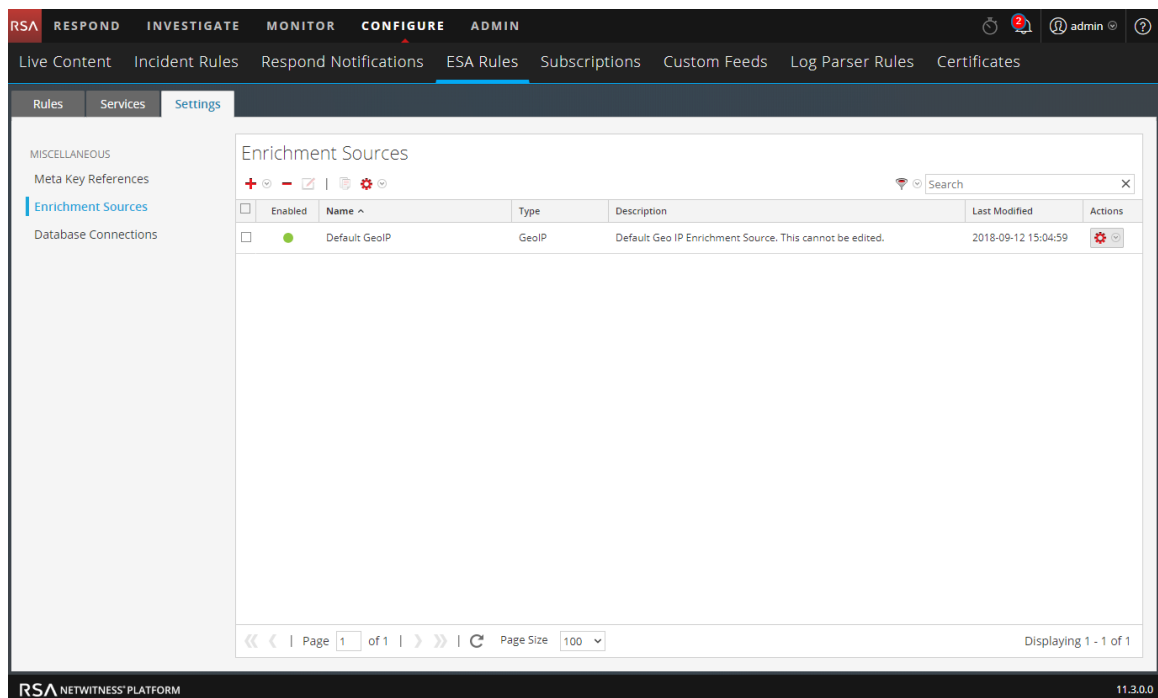

- From the  drop-down menu, select **Context Hub**.

Context Hub List

Enable ☒

Select List

Description

Columns

<input type="checkbox"/>	Name
<input type="checkbox"/>	

Page To Local Store ☐

[For information on how to define a Context Hub List, see the documentation](#)

Cancel Save

- Select **Enable** to enrich alerts with a Context Hub list. This is selected by default. If disabled, the alerts will not be enriched with the configured Context Hub list.
- Select the desired Context Hub list from the **Select List** drop-down menu of pre-configured lists.

6. (Optional) In the **Description** field, type a brief description about the selected Context Hub list. The text entered here is displayed on the Enrichment Sources panel.
7. In the **Columns** field, all columns included in the selected Context Hub list are listed. Click to enable or disable the columns in the list that you wish to include when using this list as an enrichment source in an alert.
8. (Optional) Click to enable the **Page To Local Store** option. This option is useful if you have a very large list and performance is affected. If this is the case, enabling this option will write a copy of the Context Hub list to the local disk to improve performance.
9. Click **Save**.

The Context Hub list is configured. You can now add it to an ESA rule as part of a condition statement as either a blacklist or a whitelist condition.

The following figure illustrates adding a Context Hub list as part of a condition statement. In this example, a context Hub list named "multicolumnlist" was added as a blacklist condition. The list contains two columns, SourceCity and DestinationCity. The next step would be to select one of the column names as the subcondition and then specify the operator and enter the meta value for the corresponding value field.

The screenshot shows the 'Build a Statement' dialog box. It has a title bar with a question mark and a close button. The main area contains instructions: 'Define a rule condition by adding one or more statements. For each statement, define the keys, operators, and values that will trigger the rule. If the contents of the value field include more than one value, you must specify that it should be evaluated as an array.'

Below the instructions, there is a 'Name *' field with the text 'Source and Destination City'. Underneath is a dropdown menu showing 'if all conditions are met' with plus, minus, and reset icons. Below this is a table with columns: Key, Operator, Value, Ignore Case?, and Array?.

Key	Operator	Value	Ignore Case?	Array?
<input type="checkbox"/> event.city_src	is not null		<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/> event.city_dst	is not null		<input type="checkbox"/>	<input type="checkbox"/>
<input type="checkbox"/> blacklist.multicolumnlist				
<input checked="" type="checkbox"/> <div>SourceCity DestinationCity</div>	is	Select...	<input type="checkbox"/>	<input type="checkbox"/>

Below the table, there is a note: 'Blacklist conditions can be added to include only those items defined in an enrichment list. Map a list column to an event meta key to join the list to the incoming data stream.'

At the bottom right, there are 'Cancel' and 'Save' buttons.

For complete details for adding a whitelist or blacklist to a condition statement, see [Step 2. Build a Rule Statement](#).

To add a Context Hub list as a condition to an existing rule, select to edit the desired rule in the Rule Library, then add a condition in the Conditions section and select to add a whitelist or blacklist condition to the new condition statement.



Add an Enrichment to a Rule

This topic tells how to add a previously configured enrichment source to a rule. When ESA creates an alert, information from the source gets included in it.

Adding an enrichment to a rule allows you to request for look ups into a variety of sources and include the results in the outgoing alerts, giving you a more detailed alert. This procedure requires role permissions for Administrator, DPO, and SOC Manager.

Note: This procedure does not apply to adding a Context Hub list as an enrichment to a condition statement in an existing rule. For information see [Configure Context Hub List as an Enrichment Source](#).




To add an enrichment to a rule:

1. Go to **CONFIGURE > ESA Rules**.
2. In the **Rule Library** view, do one of the following:
 - Double-click a rule.
 - Select a rule and click  in the **Rule Library** toolbar. The Rule Builder panel is displayed in a new NetWitness Platform tab.
3. In the **Enrichments** section, click  and select any of the following enrichment types:
 - In-Memory Table
 - GeoIP

Note: If you use a GeoIP source, ipv4 is automatically populated, and is not editable.

The enrichment types that you have selected are displayed in the table.

4. For the added enrichment type, perform the following:
 - In the **Output** column, select the type that you have configured.
 - In the **Enrichment Source** drop-down list, select the enrichment source defined.
 - In the **ESA Event Stream Meta** field, type the event stream meta key whose value will be used as one operand of join condition.

Enrichments   				Settings
	Output	Enrichment Source	ESA Event Stream Meta	Enrichment Source Column Name
<input type="checkbox"/>	In-Memory Table	Select Enrichment Source	Enter Meta	Enter Column Name
<input checked="" type="checkbox"/>	GeoIP	Select Enrichment Source	Enter Meta	ipv4

- In the **Enrichment Source Column Name** field, type the enrichment source column name whose value will be used as another operand of the join condition.
5. Select **Debug**. This will add a @Audit('stream') annotation to the rule. This is useful when debugging the esper rules.
 6. Click **Show Syntax** to test if the defined ESA rule is valid.
 7. Click **Save**.

For details on parameters and their descriptions, see [Rule Builder Tab](#).

Deploy Rules to Run on ESA

This topic explains how to select an ESA service and the rules to run on it. Administrator, SOC Manager or DPO role permissions are required for all tasks in this section.

To create an ESA rule deployment, you need to perform the steps described in [ESA Rule Deployment Steps](#)


How an ESA Rule Deployment Works

An ESA rule deployment consists of an ESA service, one or more data sources, and a set of ESA rules. When you deploy rules, the ESA service runs them to detect suspicious or undesirable activity in your network. Each ESA rule detects a different event, such as when a user account is created and deleted within one hour.

The ESA service performs the following functions:

1. Gathers **data** in your network
2. Runs ESA **rules** against the data
3. Applies rule **criteria** to data
4. Generates an **alert** for the captured event

The following graphic shows this workflow:

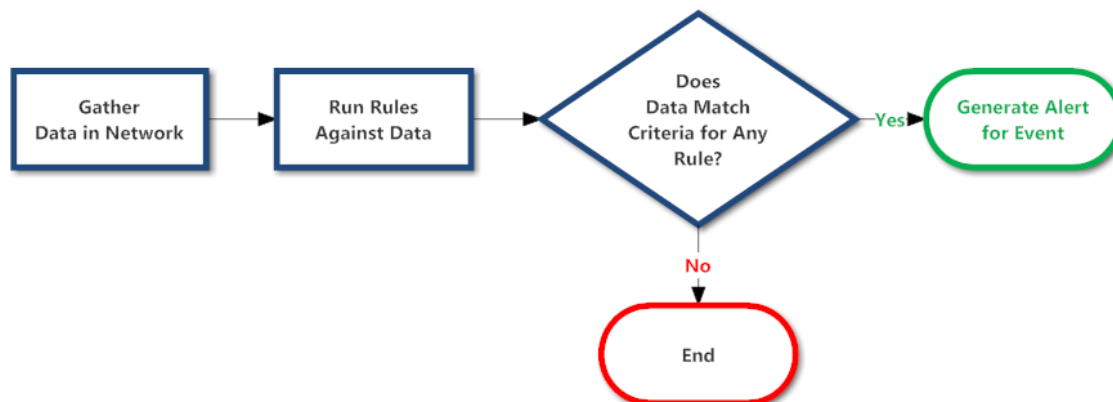

In addition, you may want to perform other steps on your deployment, such as replacing an ESA service, changing a data source, editing or deleting a rule from the deployment, renaming or deleting the deployment, or showing updates to the deployment. For descriptions of these procedures, [Additional ESA Rule Deployment Procedures](#).

ESA Rule Deployment Steps

This topic explains how to add an ESA rule deployment, which includes an ESA service with its associated data sources and a set of ESA rules. You can add an ESA rule deployment to organize and manage ESA services and rules. Think of the deployment as a container for these components:

1. An ESA service
2. One or more data sources (This is available in version 11.3 and later.)
3. A set of ESA rules

For example, if you add a Spam Activity deployment it could include an ESA London service, Concentrators with the appropriate data, and a set of ESA rules to detect suspicious email activity.

Note: An ESA rule deployment can have only one ESA service. You can, however, use the same ESA service in multiple deployments.

In NetWitness Platform version 11.2 and earlier, the ESA service is the Event Stream Analysis service. In version 11.3 and later, it is the ESA Correlation service.

To add an ESA rule deployment, you need to complete the following procedures:

- [Step 1. Add an ESA Rule Deployment](#)
- [Step 2. Add an ESA Service](#)
- [Step 3. Add Data Sources](#)
- [Step 4. Add and Deploy Rules](#)


Step 1. Add an ESA Rule Deployment

Prerequisites

The following are required to add an ESA rule deployment:

- The ESA service must be configured on the host.
- Rules must be in the Rule Library. See [Add Rules to the Rule Library](#).

To add an ESA rule deployment:

1. Go to **CONFIGURE > ESA Rules**.
The Rules tab is displayed.
2. In the options panel on the left, next to Deployments, select  > **Add** and type a **name** for the deployment. The naming convention is up to you. For example, it could indicate the purpose or


identify an owner.

The screenshot displays the RSA NetWitness Platform 11.3.0.0 interface. The top navigation bar includes tabs for RESPOND, INVESTIGATE, MONITOR, CONFIGURE, and ADMIN. The ADMIN tab is active, showing a sub-menu with Live Content, Incident Rules, Respond Notifications, ESA Rules, Subscriptions, Custom Feeds, and Log Parser Rules. The left sidebar has tabs for Rules, Services, and Settings. The main content area is divided into two sections: ESA Services and ESA Rules. The ESA Services section shows a table with columns for Status, Name, Address, Version, and Last Deployment Date. The ESA Rules section shows a table with columns for Status, Rule Name, Trial Rule, Severity, Type, Email, Snmp, Syslog, Script, Last Modified, and Actions. The table lists several rules, including 'Endpoint Risk Scoring Rule Bundle' and 'SAMPLE - Blacklist - From inside count...'. A 'Loading...' spinner is visible over the table. The bottom of the interface shows the RSA NetWitness Platform logo and version 11.3.0.0.

In NetWitness Platform 11.3 and later, the deployment names that you choose appear on the deployment tabs in the **ADMIN > ESA Rules > Services** tab.

3. Press **Enter**.

The deployment is added. The Deployment view is displayed on the right.

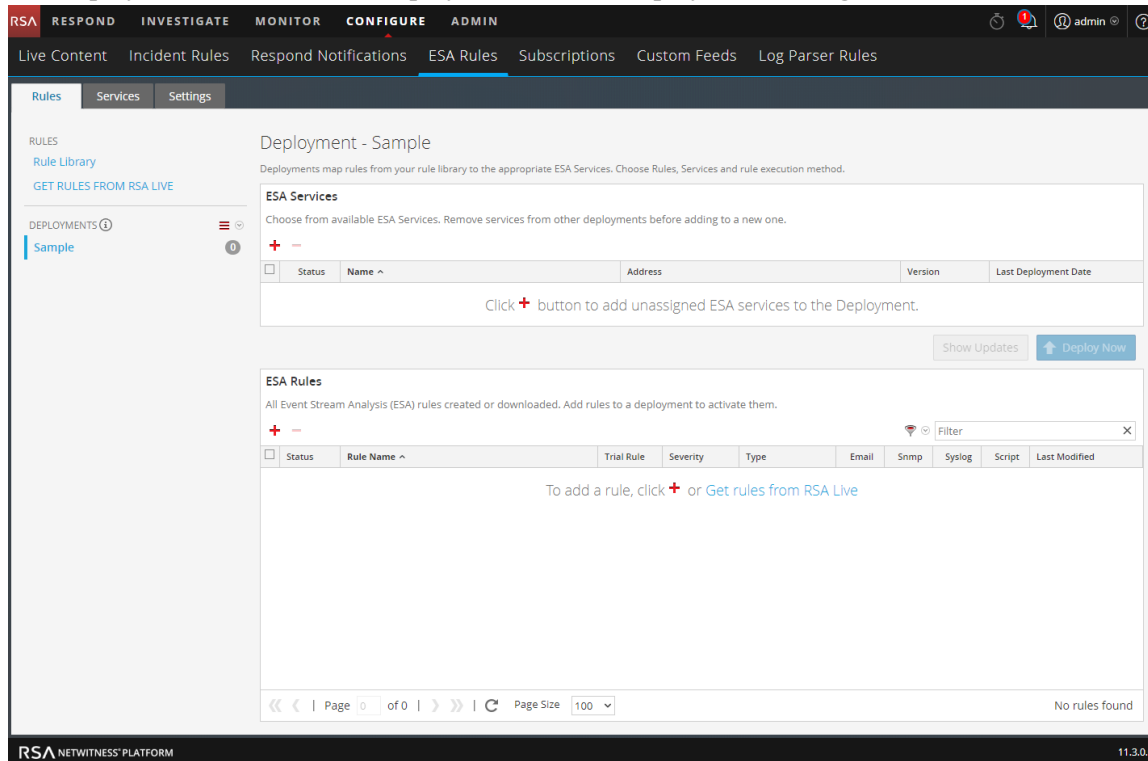

Step 2. Add an ESA Service

The ESA service in an ESA rule deployment gathers data in your network and runs ESA rules against the data. The goal is to capture events that match rule criteria, then generate an alert for the captured event.

An ESA rule deployment can have only one ESA service. You can, however, use the same ESA service in multiple deployments. For example, ESA London could be in these deployments simultaneously:


- Deployment EUR, which includes one set of rules
- Deployment CORP, which includes another set of rules.

Changes made to an ESA rule deployment do not take effect until you click **Deploy Now**. For example, Deployment EUR could include the ESA London service and a set of 25 rules. If you replace the ESA London service with the ESA Paris service, the next time you deploy Deployment EUR, the 25 rules will be removed from ESA London and added to ESA Paris.


Deleting an ESA rule deployment immediately removes the rules from the ESA service. If an ESA service is not part of any deployment, the ESA service does not have any rules.

To add an ESA service:

1. Go to **CONFIGURE > ESA Rules > Rules** tab.
2. In the options panel, select a deployment:

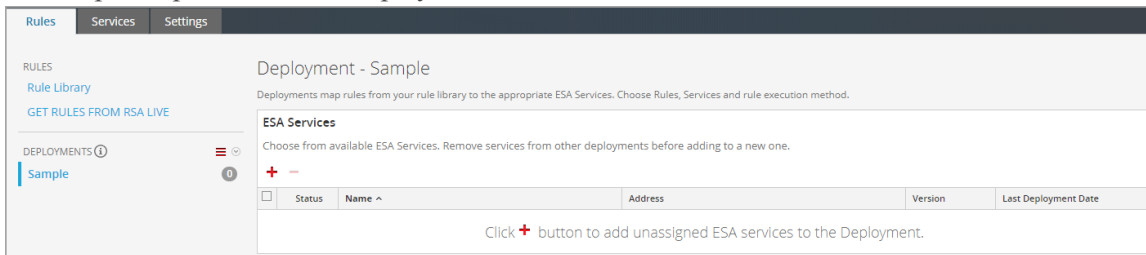

3. In the **Deployment** view, click **+** in **ESA Services**.
The Deploy ESA Services dialog lists each configured ESA.

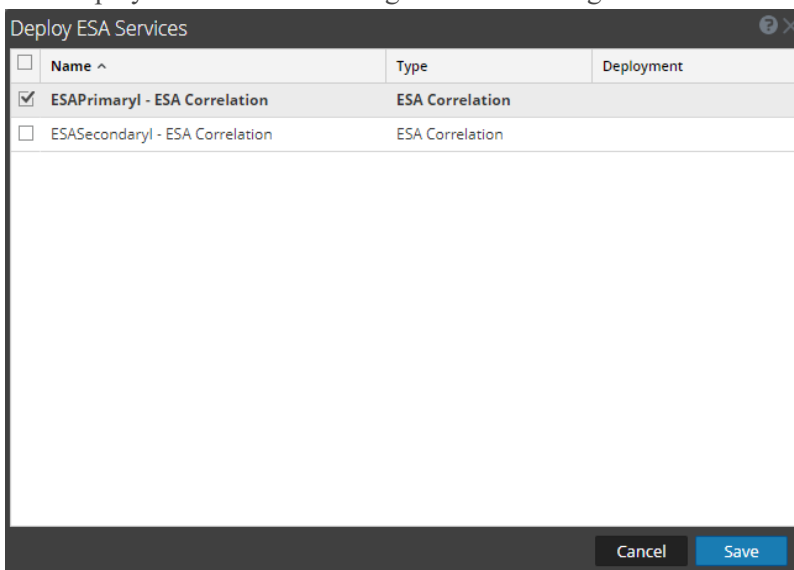

4. Select an ESA service and click **Save**.
The Deployment view is displayed. The ESA service is listed in the **ESA Services** section, with the

status **Added**.


The screenshot displays the 'Deployment - Sample' configuration page in the RSA NetWitness Platform. The page is divided into three main sections: 'ESA Services', 'Data Sources', and 'ESA Rules'. The 'ESA Services' section shows a table with one entry: 'ESAPrimary - ESA Correlation' with a status of 'Added'. The 'Data Sources' section is currently empty, with a '+ -' button to add new sources. The 'ESA Rules' section is also empty, with a '+ -' button and a 'Filter' dropdown to add rules. The page includes navigation tabs at the top (Live Content, Incident Rules, Respond Notifications, **ESA Rules**, Subscriptions, Custom Feeds, Log Parser Rules) and a left sidebar with 'Rules', 'Services', and 'Settings' tabs. The bottom of the page shows the 'RSA NETWITNESS PLATFORM' logo and the version number '11.3.0.0'.

Step 3. Add Data Sources

Note: This option is available in version 11.3 and later.


You can select one or more data sources, such as Concentrators, to use for your selected ESA Service. This enables you to specify different data sources for each deployment. For example, you may want to use Concentrators with HTTP packet data in one deployment and Concentrators with HTTP log data in another deployment.

1. Go to **CONFIGURE > ESA Rules > Rules** tab.
2. In the options panel, select a deployment.
3. Configure one or more data sources for your deployment. Do the following for each data source:
 - a. In the **Deployment** view **Data Sources** section, click **+**.
The **Available Configured Data Sources** dialog lists the services that have been configured for use as a data source.

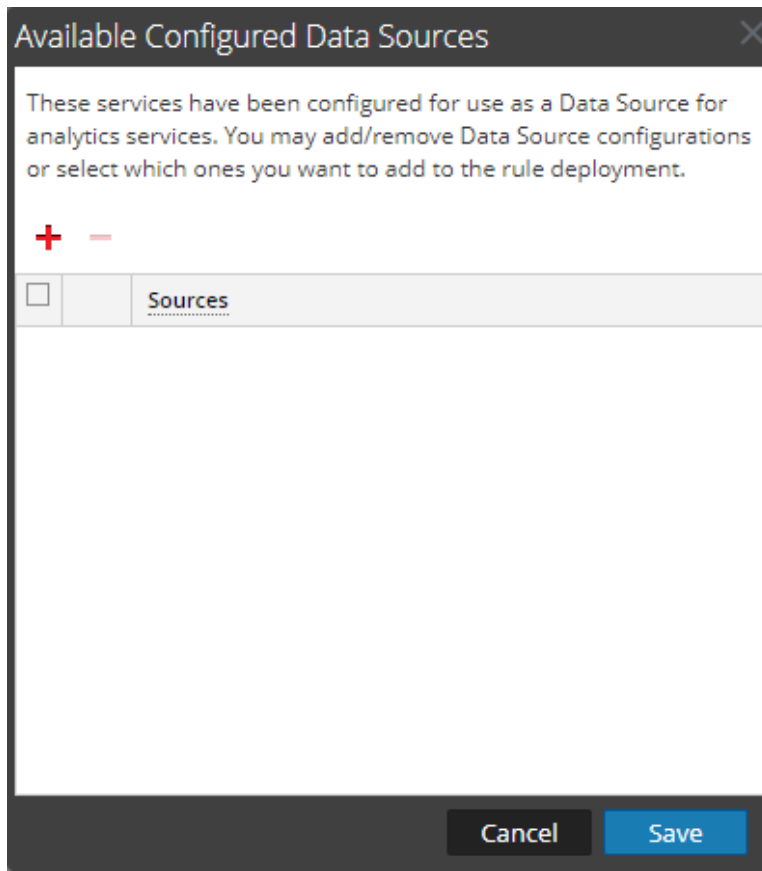

- b. To add a data source configuration, click **+**.

The **Available Services** dialog lists the available data sources from the ADMIN > Services view, such as Concentrators.

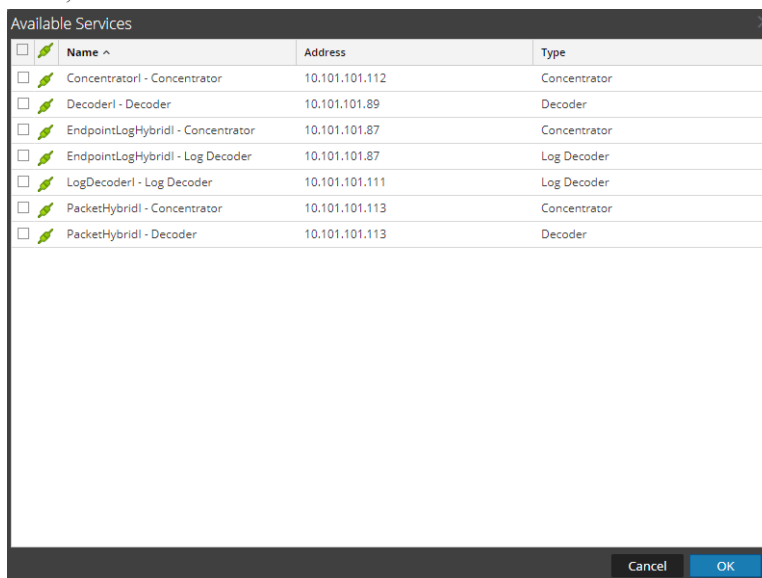

Note: You can add a Log Decoder as a data source for ESA, but it is better to add a Concentrator to take advantage of undivided aggregation as the Decoder may have other processes aggregating from it.

- c. In the **Available Services** dialog, select a data source, such as a Concentrator, and click **OK**.
- d. In the **Add Service** dialog, type the Administrator username and password for the data source.


- e. To enable the SSL or Compression options, select the corresponding checkboxes.
- f. (Optional) You have the option to adjust the Compression Level for Concentrators on ESA in NetWitness Platform 11.3 and later. To enable compression, select the **Compression** checkbox. You can set the **Compression Level** for a Concentrator from 0-9:

- Compression Level = **0** (If compression is enabled, it allows Core Services to control the amount of compression.)
- Compression Level = **1** (It uses the lowest amount of compression and has the highest performance.)
- Compression Level = **9** (It uses the highest amount of compression and has the worst performance.)

Somewhere in the middle between 1 and 9 is usually the best setting, which is what you get when you select a compression level of 0. For more detailed information, see the *Core Database Tuning Guide*.

Note: When you set the compression level for a Concentrator on ESA, it sets the same compression level for that Concentrator for ESA Correlation Rules and ESA Analytics.

- g. Click **Test Connection** to make sure that it can communicate with the ESA service.

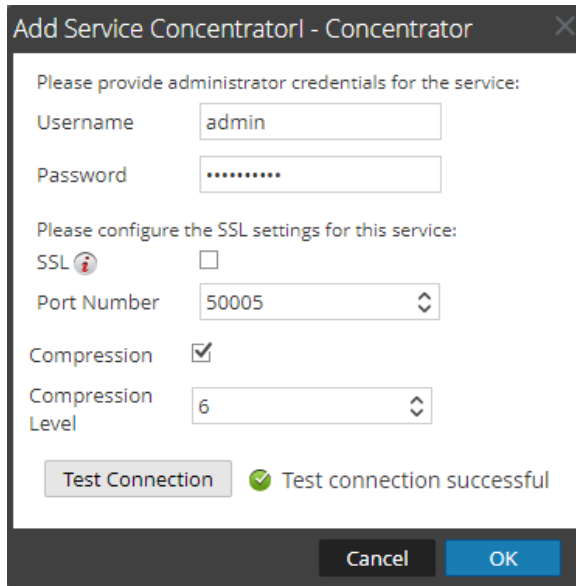


Add Service ConcentratorI - Concentrator

Please provide administrator credentials for the service:

Username:

Password:


Please configure the SSL settings for this service:

SSL  ☐

Port Number:

Compression: ☒


Compression Level:

 Test connection successful

- h. Click **OK**.

After you configure your data sources and they appear in the **Available Configured Data Sources** dialog, you can use them for your deployment.


4. In the **Available Configured Data Sources** dialog, select at least one data source to use for the deployment.

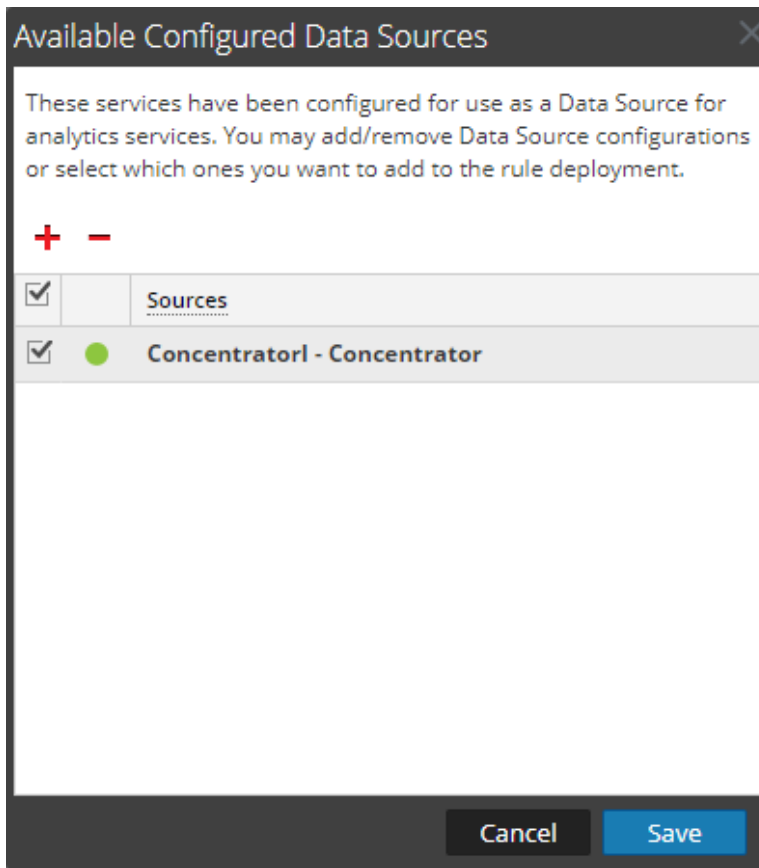

A solid colored green circle indicates a running service and a white circle indicates a stopped service.

5. Click **Save**.

In the Deployment view **Data Sources** section, the selected data sources are added to the deployment. The **Deploy Now** button activates after an ESA service, a data source, and rules are added to an ESA rule deployment.

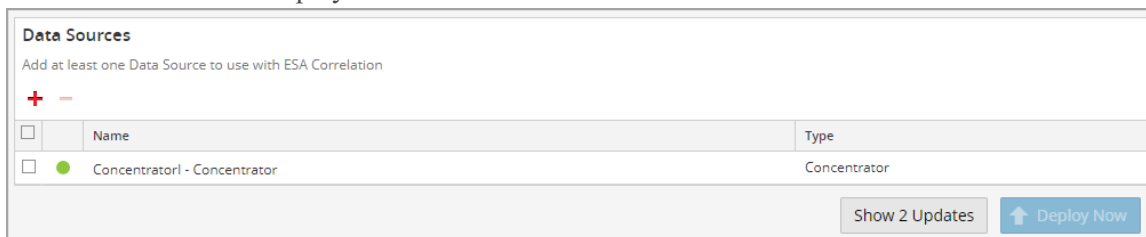

Step 4. Add and Deploy Rules

This topic explains how to add ESA rules to an ESA rule deployment and then deploy the rules on ESA. Each ESA rule has unique criteria. The ESA rules in an ESA rule deployment determine which events ESA captures, which in turn determine the alerts you receive.

For example, Deployment A includes ESA Paris and, among others, a rule to detect file transfer using a non-standard port. When ESA Paris detects a file transfer that matches the rule criteria, it captures the event and generates an alert for it. If you remove this rule from Deployment A, ESA will no longer generate an alert for such an occurrence.

To add and deploy rules:

1. Go to **CONFIGURE > ESA Rules > Rules** tab.
2. In the options panel, select a deployment.
3. In the **Deployment** view, click **+** in **ESA Rules**.

The Deploy ESA Rules dialog is displayed and shows each rule in your Rule Library:

Deploy ESA Rules

Filter

<input type="checkbox"/>	Rule Name ^	Description	Trial Rule	Type
<input type="checkbox"/>	Endpoint Risk Scoring Rule Bundle	This bundle contains many rules which are used for ris...	No	Endpoint Rule B...
<input type="checkbox"/>	SAMPLE - Blacklist - From inside countries that are not ...	Monitors for non-SMTP traffic on TCP destination port ...	Yes	Rule Builder
<input type="checkbox"/>	SAMPLE - Non SMTP Traffic on TCP Port 25 Containing ...	Monitors for non-SMTP traffic on TCP destination port ...	Yes	Rule Builder
<input type="checkbox"/>	SAMPLE - P2P Software as Detected by an Intrusion De...	P2P software as detected by an intrusion detection dev...	Yes	Rule Builder
<input type="checkbox"/>	SAMPLE - User Added to Admin Group Same User su s...	Alert when user is upgraded to one of admin groups (c...	Yes	Rule Builder
<input type="checkbox"/>	SAMPLE - Whitelist - From outside of Germany, P2P Sof...	Whitelist Germany from P2P software as detected by a...	Yes	Rule Builder

« < | Page 1 of 1 | > » | Page Size 100

Displaying 1 - 6 of 6 rules


Cancel Save


4. Select rules and click **Save**.

The Deployment view is displayed and the **Deploy Now** button is enabled.

The screenshot displays the 'Deployment - Sample' view in the RSA NetWitness Platform. The interface includes a top navigation bar with tabs for 'Live Content', 'Incident Rules', 'Respond Notifications', 'ESA Rules', 'Subscriptions', 'Custom Feeds', and 'Log Parser Rules'. The left sidebar has tabs for 'Rules', 'Services', and 'Settings'. The main content area is titled 'Deployment - Sample' and contains three sections: 'ESA Services', 'Data Sources', and 'ESA Rules'. The 'ESA Services' section shows a table with one service, 'ESAPrimary1 - ESA Correlation', which is selected. The 'Data Sources' section shows a table with one source, 'Concentrator1 - Concentrator', which is selected. The 'ESA Rules' section shows a table with five rules, all with a status of 'Added'. A 'Deploy Now' button is visible in the top right corner of the main area.

5. The rules are listed in the ESA Rules section.

- In the Status column, **Added** is next to each new rule.
- In the Deployments section,  indicates there are updates to the deployment.
- The total number of rules in the deployment is on the right.

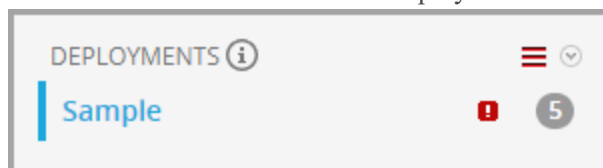6. Click **Deploy Now**.

The ESA service runs the rule set. After the ESA service completes the processing of each rule in

the deployment, the status changes to **Deployed**.

Deployment - Sample

Deployments map rules from your rule library to the appropriate ESA Services. Choose Rules, Services and rule execution method.

ESA Services

Choose from available ESA Services. Remove services from other deployments before adding to a new one.

Status	Name ^	Address	Version	Last Deployment Date
Deployed	ESAPrimary1 - ESA Correlation	10.101.101.64	11.3.0.0	2019-02-21 18:57:49

Data Sources

Add at least one Data Source to use with ESA Correlation

Name	Type
Concentrator1 - Concentrator	Concentrator

ESA Rules

All Event Stream Analysis (ESA) rules created or downloaded. Add rules to a deployment to activate them.

Status	Rule Name ^	Trial Rule	Severity	Type	Email	Snmp	Syslog	Script	Last Modified
Deployed	SAMPLE - Blacklist - From inside countries that are not...	Yes	Low	Rule Builder	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	2019-02-21 08:35:27
Deployed	SAMPLE - Non SMTP Traffic on TCP Port 25 Containing ...	Yes	Low	Rule Builder	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	2019-02-21 08:35:27
Deployed	SAMPLE - P2P Software as Detected by an Intrusion De...	Yes	Low	Rule Builder	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	2019-02-21 08:35:26
Deployed	SAMPLE - User Added to Admin Group Same User su s...	Yes	Medium	Rule Builder	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	2019-02-21 08:35:27
Deployed	SAMPLE - Whitelist - From outside of Germany, P2P Sof...	Yes	Low	Rule Builder	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	2019-02-21 08:35:27

Page 1 of 1 | Page Size 100 | Displaying 1 - 5 of 5 rules

Deploy the Endpoint Risk Scoring Rules Bundle

An Endpoint Risk Scoring Rules Bundle, which contains approximately 400 rules, comes with NetWitness Platform 11.3 and later. Endpoint risk scoring rules only apply to NetWitness Endpoint. You can add the Endpoint Risk Scoring Rules Bundle to an ESA rule deployment in the same way that you would add any ESA rule. However, you must specify endpoint data sources (Concentrators) in the ESA Rule Deployment.

The ESA Correlation service can process endpoint risk scoring rules, which generate alerts that are used in risk scoring calculations to identify suspicious files and hosts. To turn on risk scoring for NetWitness Endpoint, you must deploy endpoint risk scoring rules on ESA. For instructions, see "Deploy Endpoint Risk Scoring Rules on ESA" in the *ESA Configuration Guide*. For complete information on configuring NetWitness Endpoint, see the *NetWitness Endpoint Configuration Guide*.

Go to the [Master Table of Contents](#) to find all NetWitness Platform Logs & Network 11.x documents.

Additional ESA Rule Deployment Procedures

In addition to deploying an ESA service and rules, you may want to perform other steps on your ESA rule deployment, such as replacing an ESA service, changing a data source, editing or deleting a rule from the deployment, renaming or deleting the deployment, or showing updates to an ESA rule deployment.

Note: You cannot edit or duplicate an Endpoint Risk Scoring Rules Bundle.

In NetWitness Platform version 11.3 and later, you can add or remove a data source from a deployment.

- [Replace an ESA Service in an ESA Rule Deployment](#)
- [Add or Remove a Data Source](#) (This option is available in version 11.3 and later.)
- [Edit or Delete a Rule in a Deployment](#)
- [Edit the ESA Rule Deployment Name or Delete a Deployment](#)
- [Show Updates to an ESA Rule Deployment](#)


Each of the following procedures starts in the Rules tab (**CONFIGURE > ESA Rules > Rules tab**).

Anytime you make changes to an ESA rule deployment, you must redeploy it for the changes to take effect. To redeploy the deployment, click the **Deploy Now** button for that deployment.

Replace an ESA Service in an ESA Rule Deployment

An ESA rule deployment can have only one ESA service, but you can replace it at any time with another ESA service. You can use the same ESA service in multiple deployments.

Remove an ESA Service from an ESA Rule Deployment

1. Go to **CONFIGURE > ESA Rules > Rules tab**.
The Rules tab is displayed.
2. In the options panel, under **Deployments**, select a deployment.
3. In the **ESA Services** section, select a service and click  in the toolbar.
A confirmation dialog is displayed.
4. Click **Yes**.
The service is removed from the deployment.

Add an ESA Service to an ESA Rule Deployment


To add an ESA Service to an ESA rule deployment, see [Step 2. Add an ESA Service](#). For the ESA Correlation service in NetWitness Respond 11.3 and later, you must add at least one data source to the service. See [Step 3. Add Data Sources](#).

After you finish making changes to the ESA rule deployment, click **Deploy Now** to redeploy it. The changes take effect on ESA after the ESA rule deployment is redeployed.

Add or Remove a Data Source

Note: This option is available in NetWitness Platform version 11.3 and later.

Remove a Data Source from an ESA Rule Deployment

1. Go to **CONFIGURE > ESA Rules > Rules** tab.
The Rules tab is displayed.
2. In the Rules tab options panel, under **Deployments**, select a deployment.
3. In the **Data Sources** section, select a rule and click  in the toolbar.
The data source is removed from the deployment.

Add a Data Source to an ESA Rule Deployment

To add a data source, see [Step 3. Add Data Sources](#).

After you finish making changes to the deployment, click **Deploy Now** to redeploy it. The changes take effect on ESA after the deployment is redeployed.


Edit or Delete a Rule in a Deployment

In an ESA rule deployment, you can edit and delete rules to customize the deployment.

Edit a Rule

1. Go to **CONFIGURE > ESA Rules > Rules** tab.
The Rules tab is displayed.
2. In the Rules tab options panel, under **Deployments**, select a deployment.
3. In the **ESA Rules** panel, double-click a rule to open it in a new tab.
4. Modify the rule, then click **Save**.
The rule is saved.
5. Click **Deploy Now** to redeploy the deployment.
The changes take effect on ESA after the deployment is redeployed.

Delete a Rule

1. Go to **CONFIGURE > ESA Rules > Rules** tab.
The Rules tab is displayed.
2. In the options panel, under **Deployments**, select a deployment.
3. In the **ESA Rules** panel, select a rule and click  in the toolbar.
A confirmation dialog is displayed.
4. Click **Yes**.
The rule is deleted.

- Click **Deploy Now** to redeploy the deployment.
The changes take effect on ESA after the deployment is redeployed.

Edit the ESA Rule Deployment Name or Delete a Deployment

To access the deployments:


- Go to **CONFIGURE > ESA Rules**.
The Configure view is displayed with the Rules tab open.
- In the options panel, under **Deployments**, select a deployment.
The Deployment view is displayed.

The screenshot shows the RSA NetWitness Platform interface. The top navigation bar includes tabs for RESPOND, INVESTIGATE, MONITOR, CONFIGURE (active), and ADMIN. The CONFIGURE tab has sub-tabs: Live Content, Incident Rules, Respond Notifications, ESA Rules (active), Subscriptions, Custom Feeds, and Log Parser Rules. The left sidebar shows 'Rules' and 'Deployments' (selected). The main content area is titled 'Deployment - Sample' and contains three sections:

- ESA Services:** A table with columns: Status, Name, Address, Version, Last Deployment Date. It shows one service: 'ESAPrimary1 - ESA Correlation' with status 'Deployed', address '10.101.101.64', version '11.3.0.0', and last deployment date '2019-02-21 18:57:49'.
- Data Sources:** A table with columns: Name, Type. It shows one source: 'Concentrator1 - Concentrator' with type 'Concentrator'.
- ESA Rules:** A table with columns: Status, Rule Name, Trial Rule, Severity, Type, Email, Snmp, Syslog, Script, Last Modified. It shows five rules, all with status 'Deployed' and type 'Rule Builder'.

At the bottom of the page, there is a footer with 'RSA NETWITNESS PLATFORM' and '11.3.0.0'.

Edit the ESA Rule Deployment Name

- In the options panel, under **Deployments**, select a deployment.
The Deployment view is displayed.
- Select  > **Edit**.
The deployment name is made available for editing.
- Enter the new deployment name.
- Click **Deploy Now** to redeploy the deployment.
The changes take effect on ESA after the ESA rule deployment is redeployed. In NetWitness

Platform 11.3 and later, the deployment names that you choose appear on the deployment tabs in the **ADMIN > ESA Rules > Services** tab.

Delete an ESA Rule Deployment

1. In the options panel, under **Deployments**, select a deployment.

The Deployment view is displayed.


2. Select  > **Delete**.

A confirmation dialog is displayed.

3. Click **Yes**.

The deployment is deleted.


Show Updates to an ESA Rule Deployment

You can view changes to an ESA rule deployment, such as adding or removing rules. When there is a change to a deployment, the update icon () appears next to the name of the deployment in the Rules tab options panel.

1. Go to **CONFIGURE > ESA Rules**.

The Rules tab is displayed.


2. In the options panel, under **Deployments** click **Show Updates** on the far right.

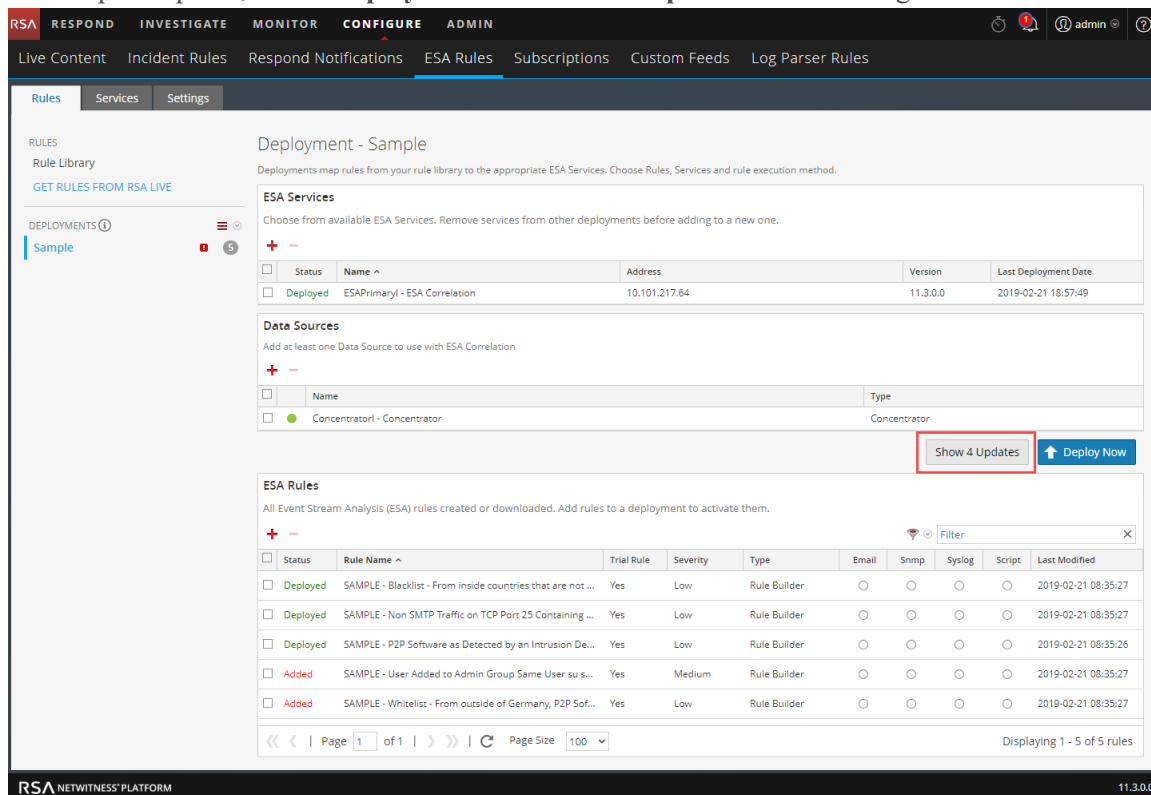

The screenshot displays the RSA NetWitness Platform interface. The top navigation bar includes tabs for RESPOND, INVESTIGATE, MONITOR, CONFIGURE, and ADMIN. The 'CONFIGURE' tab is active, and the 'ESA Rules' sub-tab is selected. The left sidebar shows 'Rules', 'Services', and 'Settings' tabs, with 'Rules' being the active tab. The main content area is titled 'Deployment - Sample' and contains three sections: 'ESA Services', 'Data Sources', and 'ESA Rules'. The 'ESA Rules' section is expanded, showing a table of rules. A 'Show 4 Updates' button is highlighted in the top right of the 'ESA Rules' section.

Status	Rule Name	Trial Rule	Severity	Type	Email	Snmp	Syslog	Script	Last Modified
Deployed	SAMPLE - Blacklist - From inside countries that are not...	Yes	Low	Rule Builder	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	2019-02-21 08:35:27
Deployed	SAMPLE - Non SMTP Traffic on TCP Port 25 Containing ...	Yes	Low	Rule Builder	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	2019-02-21 08:35:27
Deployed	SAMPLE - P2P Software as Detected by an Intrusion De...	Yes	Low	Rule Builder	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	2019-02-21 08:35:26
Added	SAMPLE - User Added to Admin Group Same User su...	Yes	Medium	Rule Builder	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	2019-02-21 08:35:27
Added	SAMPLE - Whitelist - From outside of Germany, P2P Sof...	Yes	Low	Rule Builder	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	2019-02-21 08:35:27

The Updates to the Deployments dialog opens and shows the changes to the deployment.

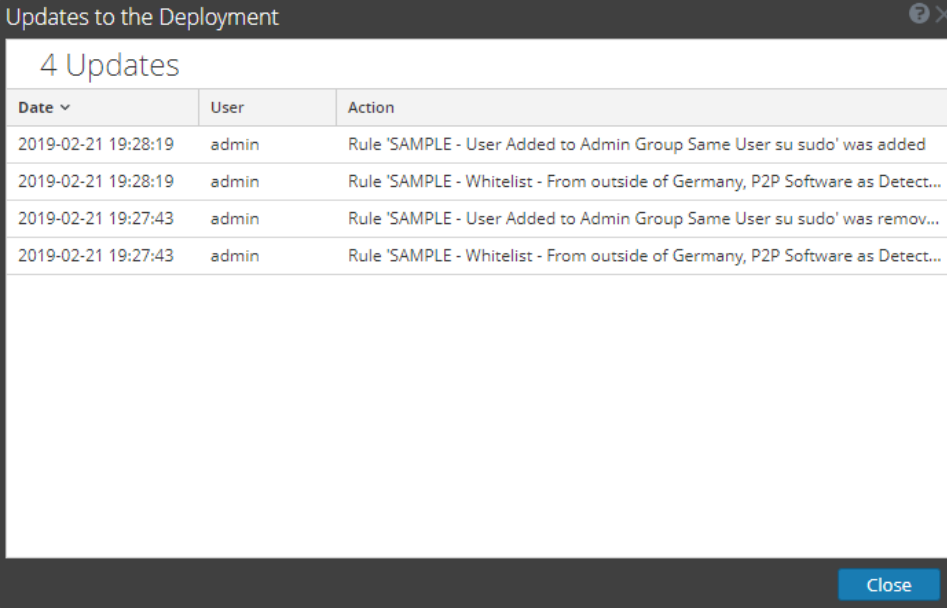

Date ▾	User	Action
2019-02-21 19:28:19	admin	Rule 'SAMPLE - User Added to Admin Group Same User su sudo' was added
2019-02-21 19:28:19	admin	Rule 'SAMPLE - Whitelist - From outside of Germany, P2P Software as Detect...
2019-02-21 19:27:43	admin	Rule 'SAMPLE - User Added to Admin Group Same User su sudo' was remov...
2019-02-21 19:27:43	admin	Rule 'SAMPLE - Whitelist - From outside of Germany, P2P Software as Detect...

3. Click **Close**.

View ESA Stats and Alerts

When ESA generates alerts, you can view details about how the rules performed, such as statistics on the engine, rule, and alert, and you can also view information on which rules are enabled or disabled. For instructions on viewing ESA stats, see [View Stats for an ESA Service](#)

When your ESA generates alerts, you can view the results in the Respond Alerts List view. This enables you to see trends and understand both the volume and frequency of alerts. For instructions on viewing alerts, see [View a Summary of Alerts](#)

View Stats for an ESA Service

This topic describes how to view the deployment statistics (stats) for an ESA Correlation service. This procedure is useful when you are attempting to determine the effectiveness of a rule or troubleshoot an ESA rule deployment.

Caution: When you modify and re-deploy an ESA rule deployment, all of the stats are removed from that deployment. The generated alerts are not removed from NetWitness Respond.



View ESA Stats

1. Go to **CONFIGURE > ESA Rules > Services** tab.
2. From the **ESA Services** list on the left, select a service.
The deployment stats for the selected service are displayed.

The screenshot displays the RSA NetWitness Platform interface for viewing ESA service statistics. The navigation bar at the top includes tabs for RESPOND, INVESTIGATE, MONITOR, CONFIGURE, and ADMIN. The CONFIGURE tab is active, and the ESA Rules sub-tab is selected. The left sidebar shows the ESA SERVICES list with 'SESA - ESA Correlation' selected. The main content area shows the 'SESA - ESA Correlation' service details for 'Deployment A'. It includes three sections: Engine Stats, Rule Stats, and Alert Stats. The Engine Stats section shows the Esper Version (7.1.0), Time (2019-02-07T18:51:34), Events Offered (10477), Offered Rate (0 per second / 71 max), and Status (Active). The Rule Stats section shows Rules Enabled (4), Rules Disabled (0), and Events Matched (0). The Alert Stats section shows Notifications (0) and Message Bus (0). Below these sections is a table for Deployed Rule Stats, which lists four sample rules with their respective Rule Types, Trial Rule status, Last Detected time, Events Matched count, and Memory Usage. The bottom of the interface shows the RSA NETWITNESS PLATFORM logo and the version number 11.3.0.0.


3. (This option applies to NetWitness Platform version 11.3 and later.) In the Deployment view under the ESA Correlation service name, select the tab of the deployment you would like to view. For example, select the Deployment A tab to view the stats for deployment A. Select the Deployment B tab to view the status for deployment B.
4. Review the following sections of ESA stats.
For a complete description of each statistic in each section, see [Services Tab](#).
 - **Engine Stats**
 - **Rule Stats**
 - **Alert Stats**
5. In the **Deployed Rule Stats**, review details about the rules deployed on the ESA.
For a complete description of each column in each section, see [Services Tab](#).
 - If the rule is enabled or disabled
 - What the rule name is
 - The type of rule
 - If the rule is running in Trial Rule mode
 - Last detected
 - Events matched
 - The amount of memory used by the rule
6. To monitor overall memory usage and health of your ESA Correlation service, click **Health & Wellness**.

Enable or Disable Rules

1. In the **Deployed Rule Stats** panel, select a rule from the grid.
2. Click  **Enable** to enable the rule, or click  **Disable** to disable the rule.
The Services tab is refreshed to show the changes, which take effect immediately.

Refresh the Statistics

The Services tab does not update statistics automatically unless you enable or disable a rule. To ensure you view current statistics:

1. Click  in the upper right corner to refresh the information.
2. View the updated information.

View a Summary of Alerts

In the Respond view, you can browse through various alerts from multiple sources. You can filter the alerts list to show only alerts of interest, such as by Alert Name, alert source, and a specific time range.

1. Go to **RESPOND > Alerts**.

The Respond Alerts List view displays a list of all NetWitness Platform alerts.

CREATED	SEVERITY	NAME	SOURCE	# EVENTS	HOST SUMMARY	INCIDENT ID
08/10/2017 06:30...	70	ESA Alert - Everything	Event Stream Analysis	1	0.0.1:51521 to 0...	
08/10/2017 06:30...	70	1 ESA Rule	Event Stream Analysis	1	0.0.1:51521 to 0...	
08/10/2017 06:30...	70	Enrichment - GeoIP	Event Stream Analysis	1	0.0.1:51521 to 0...	
08/10/2017 06:30...	70	10 ESA Rule	Event Stream Analysis	1	0.0.1:51521 to 0...	
08/10/2017 06:30...	90	ESA Rule - Source IP	Event Stream Analysis	1	0.0.1:51521 to 0...	
08/10/2017 06:30...	70	2 ESA Rule	Event Stream Analysis	1	0.0.1:51521 to 0...	
08/10/2017 06:30...	90	Reporting Engine IP Source	Reporting Engine	1	0.0.1:42274 to 0...	
08/10/2017 06:30...	70	ESA Alert - Everything	Event Stream Analysis	1	0.0.1:42274 to 0...	
08/10/2017 06:30...	70	1 ESA Rule	Event Stream Analysis	1	0.0.1:42274 to 0...	
08/10/2017 06:30...	70	Enrichment - GeoIP	Event Stream Analysis	1	0.0.1:42274 to 0...	
08/10/2017 06:30...	70	10 ESA Rule	Event Stream Analysis	1	0.0.1:42274 to 0...	
08/10/2017 06:30...	90	ESA Rule - Source IP	Event Stream Analysis	1	0.0.1:42274 to 0...	
08/10/2017 06:30...	70	2 ESA Rule	Event Stream Analysis	1	0.0.1:42274 to 0...	
08/10/2017 06:29...	70	ESA Alert - Everything	Event Stream Analysis	1	0.0.1:38917 to 0...	
08/10/2017 06:29...	70	1 ESA Rule	Event Stream Analysis	1	0.0.1:38917 to 0...	
08/10/2017 06:29...	70	Enrichment - GeoIP	Event Stream Analysis	1	0.0.1:38917 to 0...	
08/10/2017 06:29...	70	10 ESA Rule	Event Stream Analysis	1	0.0.1:38917 to 0...	
08/10/2017 06:29...	90	ESA Rule - Source IP	Event Stream Analysis	1	0.0.1:38917 to 0...	

2. In the **Filters** panel on the left, you can filter the alerts list to view specific alerts for a specific time frame. For example, in the ALERT NAMES section, you can select an alert for an ESA rule, such as Direct Login to an Administrative Account, and leave the TIME FRAME set to Last Hour. The alerts list to the right shows a list of alerts that match your filter selection along with a count of the alerts at the bottom of the alerts list.

CREATED	SEVERITY	NAME	SOURCE	# EVEN...	HOST SUMMARY	INCIDENT ID
05/17/2018 08:59:08 pm	50	Direct Login To an Administrative Account	Event Stream Analysis	1	10.10.10.10	INC-11407
05/17/2018 08:55:26 pm	50	Direct Login To an Administrative Account	Event Stream Analysis	1	10.10.10.10	INC-11404
05/17/2018 08:52:16 pm	50	Direct Login To an Administrative Account	Event Stream Analysis	1	10.10.10.10	INC-11403
05/17/2018 08:39:47 pm	50	Direct Login To an Administrative Account	Event Stream Analysis	1	10.10.10.10	INC-11405
05/17/2018 08:39:07 pm	50	Direct Login To an Administrative Account	Event Stream Analysis	1	10.10.10.10	INC-11404
05/17/2018 08:35:47 pm	50	Direct Login To an Administrative Account	Event Stream Analysis	1	10.10.10.10	INC-11403
05/17/2018 08:33:43 pm	50	Direct Login To an Administrative Account	Event Stream Analysis	1	10.10.10.10	INC-11402
05/17/2018 08:28:07 pm	50	Direct Login To an Administrative Account	Event Stream Analysis	1	10.10.10.10	INC-11401
05/17/2018 08:26:14 pm	50	Direct Login To an Administrative Account	Event Stream Analysis	1	10.10.10.10	INC-11400
05/17/2018 08:22:47 pm	50	Direct Login To an Administrative Account	Event Stream Analysis	1	10.10.10.10	INC-11399
05/17/2018 08:09:18 pm	50	Direct Login To an Administrative Account	Event Stream Analysis	1	10.10.10.10	INC-11398
05/17/2018 08:02:33 pm	50	Direct Login To an Administrative Account	Event Stream Analysis	1	10.10.10.10	INC-11399

The alerts list shows information about each of the alerts.

- **Created:** Displays the date and time when the alert was created in the source system.
 - **Severity:** Displays the level of severity of the alert. The values are from 1 to 100.
 - **Name:** Displays a basic description of the alert.
 - **Source:** Displays the original source of the alert.
 - **# of Events:** Indicates the number of events contained within an alert.
 - **Host Summary:** Displays details of the host, like the host name from where the alert was triggered.
 - **Incident ID:** Shows the incident ID of the alert. If there is no incident ID, the alert does not belong to an incident.
3. You can click an alert in the list to open an **Overview** panel on the right where you can view raw alert metadata.

The screenshot displays the RSA NetWitness Respond interface. The top navigation bar includes tabs for RESPOND, INVESTIGATE, MONITOR, CONFIGURE, and ADMIN. The user is logged in as 'admin'. The 'Alerts' tab is active, showing a list of alerts generated by the 'ESA Rule - Source IP' rule. The table columns are: CREATED, SEVERITY, NAME, SOURCE, # EVENTS, HOST SUMMARY, and INCIDENT ID. The table shows 66 items, with the first 15 visible. The selected alert is highlighted in blue.

CREATED	SEVERITY	NAME	SOURCE	# EVENTS	HOST SUMMARY	INCIDENT ID
08/10/2017 06:32:58 pm	90	ESA Rule - Source IP	Event Stream Analysis	1	0.0.1:48018 to 127.0.0.1:4369	
08/10/2017 06:31:58 pm	90	ESA Rule - Source IP	Event Stream Analysis	1	0.0.1:42376 to 127.0.0.1:4369	
08/10/2017 06:30:58 pm	90	ESA Rule - Source IP	Event Stream Analysis	1	0.0.1:51521 to 127.0.0.1:4369	
08/10/2017 06:30:02 pm	90	ESA Rule - Source IP	Event Stream Analysis	1	0.0.1:42274 to 127.0.0.1:4369	
08/10/2017 06:29:01 pm	90	ESA Rule - Source IP	Event Stream Analysis	1	0.0.1:38917 to 127.0.0.1:4369	
08/10/2017 06:28:00 pm	90	ESA Rule - Source IP	Event Stream Analysis	1	0.0.1:42726 to 127.0.0.1:4369	
08/10/2017 06:26:59 pm	90	ESA Rule - Source IP	Event Stream Analysis	1	0.0.1:56538 to 127.0.0.1:4369	
08/10/2017 06:25:58 pm	90	ESA Rule - Source IP	Event Stream Analysis	1	0.0.1:43731 to 127.0.0.1:4369	
08/10/2017 06:24:58 pm	90	ESA Rule - Source IP	Event Stream Analysis	1	0.0.1:38044 to 127.0.0.1:4369	
08/10/2017 06:23:59 pm	90	ESA Rule - Source IP	Event Stream Analysis	1	0.0.1:47980 to 127.0.0.1:4369	
08/10/2017 06:22:59 pm	90	ESA Rule - Source IP	Event Stream Analysis	1	0.0.1:59458 to 127.0.0.1:4369	
08/10/2017 06:21:58 pm	90	ESA Rule - Source IP	Event Stream Analysis	1	0.0.1:35828 to 127.0.0.1:4369	
08/10/2017 06:21:01 pm	90	ESA Rule - Source IP	Event Stream Analysis	1	0.0.1:35174 to 127.0.0.1:4369	
08/10/2017 06:20:00 pm	90	ESA Rule - Source IP	Event Stream Analysis	1	0.0.1:42983 to 127.0.0.1:4369	
08/10/2017 06:18:59 pm	90	ESA Rule - Source IP	Event Stream Analysis	1	0.0.1:52740 to 127.0.0.1:4369	

Showing 66 out of 66 items | 0 selected

The right-hand pane shows the details for the selected alert, titled 'ESA Rule - Source IP'. It includes an overview section with the following information:

- Incident ID: (None)
- Created: 08/10/2017 06:30:02 pm
- Severity: 90
- Source: Event Stream Analysis
- Type: Network
- # Events: 1
- Host Summary: 0.0.1:42274 to 0.0.1:4369

The raw alert data is displayed as a JSON object:

```
{
  "Instance_Id": "aeb48f135d75b0f508fc71f39ac8b",
  "engineId": "default",
  "events": [
    {
      "client_ip": 8,
      "ip_proto": 8,
      "client_payload": 0,
      "ip_src": "127.0.0.1",
      "lifetime": 0,
      "media": 1,
      "server_entropy": 3924,
      "sessionId": 853181,
      "rid": 16599,
      "packets": 19,
      "eth_src": "08:00:00:00:00:00",
      "packets": 2,
      "payload": 58,
    }
  ]
}
```

For more information about filtering alerts and viewing alert details, see the *NetWitness Respond User Guide*.

ESA Alert References

In Event Stream Analysis (ESA), you configure and deploy ESA rules to get alerted about potential network threats.

These topics explain the user interface for ESA Correlation rules.

- [New Advanced EPL Rule Tab](#)
- [Build a Statement Dialog](#)
- [Deploy ESA Rules Dialog](#)
- [Deploy ESA Services Dialog](#)
- [Rule Builder Tab](#)
- [Rules Tab](#)
- [Rule Syntax Dialog](#)
- [Services Tab](#)
- [Settings Tab](#)
- [Updates to the Deployment Dialog](#)

New Advanced EPL Rule Tab

The Advanced EPL Rule tab enables you to define rule criteria with an Event Processing Language (EPL) query.

What do you want to do?

Role	I want to ...	Show me how
Content Expert	Define an Advanced EPL rule.	Add an Advanced EPL Rule
Content Expert	See examples of an Advanced EPL Rule.	Sample Advanced EPL Rules

Related Topics


- [Add a Rule Builder Rule](#)
- [Enrichment Sources](#)

Advanced EPL Rule

To access the Advanced EPL Rule tab:

1. Go to **CONFIGURE > ESA Rules**.

The Configure view is displayed with the Rules tab open by default.

2. In the **Rule Library** toolbar, select   > **Advanced EPL**.

The Advanced EPL Rule tab is displayed.

Below is a screen shot of the Advanced EPL Rule tab.

Advanced EPL
Write a rule in Event Processing Language.

Rule Name *

Description

Trial Rule ☒

Alert ☒

Severity * Low

Query *

Notifications [Global Notifications](#)

Output	Notification	Notification Server	Template
No parameters to edit.			

☐ Output Suppression of every minutes

Enrichments [Settings](#)

Output	Enrichment Source	ESA Event Stream Meta	Enrichment Source Column Name
No parameters to edit.			

Save Close Show Syntax * = required field

RSA NETWITNESS PLATFORM 11.3.0.0

The following table lists the parameters in the Advanced EPL Rule tab.



Parameters	Description
Rule Name	Purpose of the ESA rule.
Description	Summary of what the ESA rule detects.
Trial Rule	Deployment mode to see if the rule runs efficiently.
Alert	(This option applies to version 11.3 and Later.) When selected, the alert is sent to Respond. If the checkbox is cleared, an alert will not be sent to Respond. To turn alerts on or off for ALL rules, see the <i>ESA Configuration Guide</i> .
Severity	Threat level of alert triggered by the rule.
Query	EPL query that defines rule criteria.

Notifications

In the Notifications section, you can choose how to be notified when ESA generates an alert for the rule. For more information on the alert notifications, see [Add Notification Method to a Rule](#).

The following figure shows the Notifications section.

Notifications + ⌵ - Global Notifications			
Output	Notification	Notification Server	Template
<input checked="" type="checkbox"/> SYSLOG	Local_SysLog	localhost-514	Default Syslog Template
<input type="checkbox"/> Output Suppression of every <input type="text"/> minutes			

Parameter	Description
	To add an alert notification type.
	To delete the selected alert notification type.
Output	Alert notification type. Options are: <ul style="list-style-type: none"> Email SNMP (This option is not supported in NetWitness Platform version 11.3 and later.) Syslog Script
Notification	Name of previously configured output, such as an email distribution list.
Notification Server	Name of server that sends the output.
Template	Name of template for the alert notification.
Output Suppression of every	Option to specify alert frequency.
Minutes	Alert frequency in minutes.



Enrichments

In the Enrichments section, you can add a data enrichment source to a rule.

For more information on the enrichments, see [Add an Enrichment to a Rule](#).

The following figure shows the Enrichments section.

Enrichments + ⌵ - Settings			
Output	Enrichment Source	ESA Event Stream Meta	Enrichment Source Column Name
<input type="checkbox"/> In-Memory Table	Select Enrichment Source	Enter Meta	Enter Column Name
<input checked="" type="checkbox"/> GeoIP	Select Enrichment Source	Enter Meta	ipv4

Parameter	Description
	To add an enrichment.
	To delete the selected enrichment.

Parameter	Description
Output	Enrichment source type. Options are: <ul style="list-style-type: none">• In-Memory Table• External DB Reference (This option is not supported in NetWitness Platform version 11.3 and later.)• Warehouse Analytics (This option is not supported in NetWitness Platform version 11.3 and later.)• GeoIP
Enrichment Source	Name of previously configured enrichment source, such as a .CSV filename for an In-Memory Table.
ESA Event Stream Meta	ESA meta key whose value will be used as one operand of join condition.
Enrichment Source Column Name	Enrichment source column name whose value will be used as the other operand of the join condition.

Syntax

Click **Show Syntax** to view the EPL syntax of conditions, statements, and debugging parameters. It also provides a warning when the syntax is invalid. For more information, see [Rule Syntax Dialog](#).

Build a Statement Dialog

The Build a Statement dialog allows you to construct a condition statement when creating a new Rule Builder rule.

What do you want to do?

Role	I want to ...	Show me how
Content Expert	Configure a rule statement.	Add an Advanced EPL Rule
Content Expert	Add conditions to the rule.	Step 3. Add Conditions to a Rule Statement

Related Topics

- [Add a Rule Builder Rule](#)

Build a Statement Dialog

To access the Build a Statement dialog:

1. Go to **CONFIGURE > ESA Rules**.


The Configure ESA Rules view is displayed with the Rules tab open.

2. In the **Rule Library** toolbar, select  > **Rule Builder**.

A New Rule tab is displayed..

3. In the **Conditions** section, click .

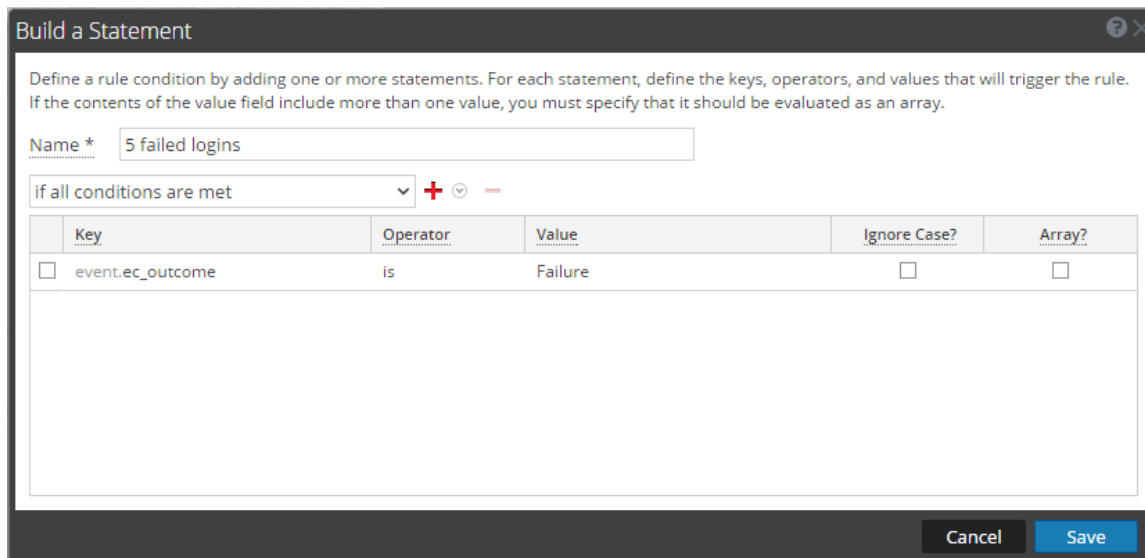


The Build a Statement dialog is displayed.



Build a Statement



Define a rule condition by adding one or more statements. For each statement, define the keys, operators, and values that will trigger the rule. If the contents of the value field include more than one value, you must specify that it should be evaluated as an array.

Name *

Key	Operator	Value	Ignore Case?	Array?
<input type="checkbox"/> event.ec_outcome	is	Failure	<input type="checkbox"/>	<input type="checkbox"/>

The following table describes the parameters in the Build a Statement dialog.

Parameter	Description
Name	Purpose of the statement.
Select	Conditions the rule requires. There are two options: <ul style="list-style-type: none"> • If all conditions are met • If any of these conditions are met
Key	Key for ESA to check in the rule statement.
Operator	Relationship between the meta key and value for the key: <ul style="list-style-type: none"> • is • is not • is not null • is greater than (>) • is greater than or equal to (>=) • is less than (<) • is less than or equal to (<=) • is one of (For array type meta) • is not one of (For array type meta) • contains • not contains • begins with • ends with
Value	Value for ESA to look for in the key.
Ignore Case?	This field is designed for use with string and array of string values. By choosing the Ignore Case field, the query will treat all string text as a lowercase value. This ensures that a rule that searches for the user named Johnson would trigger if the event contains "johnson," "JOHNSON," or "JoHnSoN."
Array?	Choice to indicate if contents of Value field represent one value or multiple values: <ul style="list-style-type: none"> • Select the box to indicate multiple values. • Clear the box to indicate one value.
	Add a statement. You can add a meta condition, whitelist condition, or blacklist condition.
	Delete selected statement.
Save	Add statement to the Conditions section of the Rule Builder tab.

The following table shows the operators you can use in the Rule Builder:

Operator	Required Value	Usage	Example	Meaning
is	Singular string value	The meta key is equal to the <i>value</i> field.	<i>user_dst</i> is John Doe.	<i>user_dst</i> is equal to the string "John Doe".
is	Array string value	The meta key is equal to one of the elements of the <i>value</i> field.	<i>user_dst</i> is John, Doe, Smith.	<i>user_dst</i> is equal either to the string "John" or to the string "Doe" or to the string "Smith" (Note, the spaces are stripped.).
is not	Singular string value	The meta key is not equal to the <i>value</i> field.	<i>size</i> is not 200.	<i>size</i> is not equal to the number 200 (size is a numeric value).
is not	Array string value	The meta key is not equal to any of the elements of the <i>value</i> field.	<i>size</i> is not 200, 300, 400.	<i>size</i> is equal neither to 200 nor to 300 nor to 400.
is not null	N/A (looks for any value)	The meta key value is not null.	<i>user_dst</i> is not null.	<i>user_dst</i> is a meta that contains a value.
is greater than (>)	Number	The numeric value of the meta key is greater than the number in the <i>value</i> field.	<i>payload</i> is greater than 7000.	<i>payload</i> is a numeric value that is greater than 7000.
is greater than or equal to (>=)	Number	The numeric value of the meta key is greater than or equal to the number in the <i>value</i> field.	<i>payload</i> is greater than or equal to 7000.	<i>payload</i> is a numeric value that is greater than or equal to 7000.
is less than (<)	Number	The numeric value of the meta key is less than the number in the <i>value</i> field.	<i>ip_dstport</i> is less than 1024.	<i>ip_dstport</i> is a numeric value that is less than the numeric value 1024.
is less than or equal to (<=)	Number	The numeric value of the meta key is less than or equal to the number in the <i>value</i> field.	<i>ip_dstport</i> is less than or equal to 1024.	<i>ip_dstport</i> is a numeric value that is less than or equal to numeric value 1024.
is one of	Array string value	The meta key is one of the array string values in the <i>value</i> field.	<i>alias_host</i> is one of Facebook, UTube, Instagram.	<i>alias_host</i> is one of the array string values Facebook, UTube, Instagram.

Operator	Required Value	Usage	Example	Meaning
is not one of	Array string value	The meta key is not one of the array string values in the <i>value</i> field.	<i>alias_host</i> is not one of Facebook, UTube, Instagram.	<i>alias_host</i> is not one of the array string values <i>Facebook</i> , <i>UTube</i> , <i>Instagram</i> .
contains	String	The <i>value</i> field is a substring of the meta key. (This operator is only available for a string-valued meta key).	<i>ec_outcome</i> contains failure.	<i>ec_outcome</i> is a string that contains the substring <i>"failure"</i> .
not contains	String	The <i>value</i> field is not a substring of the meta key (This operator is only available for a string-valued meta key).	<i>ec_outcome</i> not contains failure.	<i>ec_outcome</i> is a string that does not contain the substring <i>"failure"</i> .
begins with	String	The <i>value</i> field is the beginning of the meta key (This operator is only available for a string-valued meta key).	<i>ip_dst</i> begins with 127.0.	<i>ip_dst</i> is a string that starts with <i>"127.0"</i> .
ends with	String	The <i>value</i> field is the end of the meta key (This operator is only available for a string-valued meta key).	<i>user_dst</i> ends with son.	<i>user_dst</i> is a string that ends in <i>"son"</i> .

Note: Terms in *bold italics* are Meta that may not exist in all customer environments.

Deploy ESA Rules Dialog

The Deploy ESA Rules dialog enables you to filter and select rules to deploy to an ESA service.

What do you want to do?




Role	I want to ...	Show me how
Content Expert	Configure an ESA rule deployment.	Step 1. Add an ESA Rule Deployment
Content Expert	Deploy a rule	Step 4. Add and Deploy Rules

Related Topics


- [Additional ESA Rule Deployment Procedures](#)

Deploy ESA Rules Dialog

To access this dialog:

1. Go to **CONFIGURE > ESA Rules**.
The Rules tab opens by default.
2. In the options panel, under the **Deployment** section, select or add a new deployment by clicking   > **Add**.
3. If you add a new deployment, type the name of the deployment in the box in the options panel.
4. In the **ESA Rules** panel, click .
The Deploy ESA Rules dialog is displayed.

The following figure shows an example of this dialog.

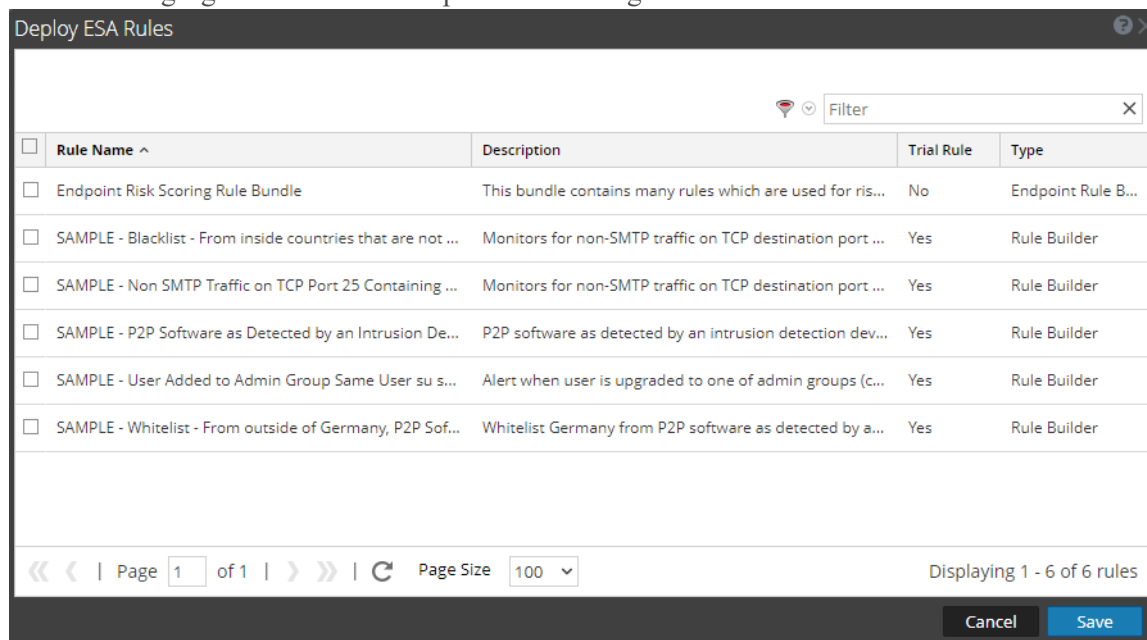

The following table describes the parameters of the Deploy ESA Rules dialog.

Parameters	Description
	Filters the list of rules based on severity and type. The text box beside this icon filters based on rule name.
Rule Name	Displays the name of the rule.
Description	Describes the rule.
Trial Rule	Indicates whether or not the rule is a trial rule.
Type	Indicates the type of rule: RSA Live ESA, Advanced EPL, or Rule Builder.

Deploy ESA Services Dialog

The Deploy ESA Services dialog displays all ESA services available to be added to an ESA rule deployment.

What do you want to do?


Role	I want to ...	Show me how
Content Expert	Configure an ESA rule deployment.	ESA Rule Deployment Steps
Content Expert	Add a service.	ESA Rule Deployment Steps
Content Expert	Add data sources. (This is available in 11.3 and later.)	ESA Rule Deployment Steps
Content Expert	Add and deploy rules.	ESA Rule Deployment Steps

Related Topics


- [Additional ESA Rule Deployment Procedures](#)
- [View Stats for an ESA Service](#)

Deploy ESA Services Dialog

To access this dialog:

1. Go to **CONFIGURE > ESA Rules**.
The Rules tab opens by default.
2. In the options panel, under the **Deployment** section, select or add a deployment.
3. In the **ESA Services** panel, click .
The Deploy ESA Services dialog is displayed.

The following figure is an example of this dialog.

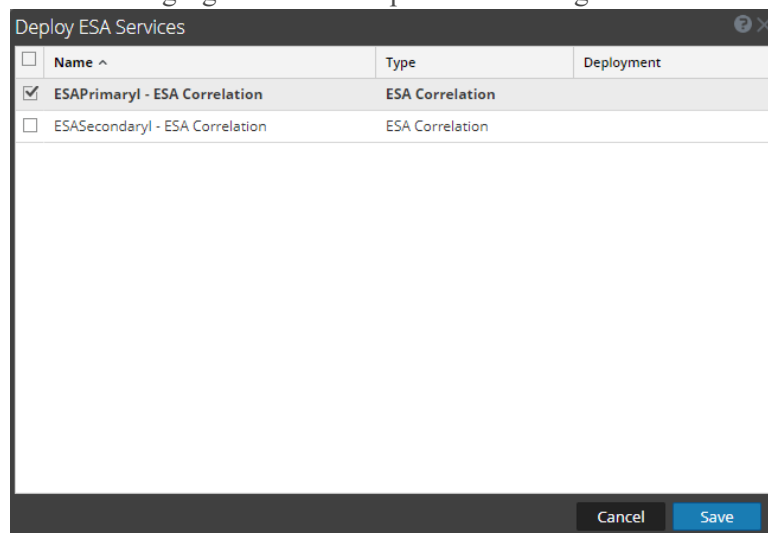

The following table describes the parameters of the Deploy ESA Services dialog.

Parameters	Description
Name	Displays the name of configured ESA services.
Deployment	Displays the ESA rule deployments to which the service has already been added.

Rule Builder Tab

The Rule Builder tab enables you to define a Rule Builder rule.

What do you want to do?

Role	I want to ...	Show me how
Content Expert	Define a Rule Builder rule.	Add a Rule Builder Rule
Content Expert	Define rule criteria.	Step 2. Build a Rule Statement
Content Expert	Add conditions to the rule.	Step 3. Add Conditions to a Rule Statement

Related Topics

- [Add an Advanced EPL Rule](#)

Rule Builder

To access the Rule Builder tab:

1. Go to **CONFIGURE > ESA Rules**.

The Rules tab opens by default.

2. In the **Rule Library** toolbar, select  > **Rule Builder**.

The Rule Builder tab is displayed.

The following figure shows the Rule Builder tab.

Rule Builder
Build a rule using drag-and-drop and auto-complete tools.

Rule Name *

Description

Trial Rule ☒

Alert ☒

Severity * Low

Conditions *

Statement	Occurs	Connector	Correlation Type	Meta	Meta
Please add at least one statement.					

Group By

Occurs Within minutes

Notifications

Output	Notification	Notification Server	Template
No parameters to edit.			

☐ Output Suppression of every minutes

Enrichments

Output	Enrichment Source	ESA Event Stream Meta	Enrichment Source Column Name
No parameters to edit.			

Debug ☐

Save Close Show Syntax * = required field

RSA NETWITNESS PLATFORM 11.3.0.0

The following table lists the parameters in the Rule Builder tab.

Parameters	Description
Rule Name	Purpose of the ESA rule.
Description	Summary of what the ESA rule detects.
Trial Rule	Deployment mode to see if the rule runs efficiently.
Alert	(This option applies to version 11.3 and later.) When selected, the alert is sent to Respond. If the checkbox is cleared, an alert will not be sent to Respond. To turn alerts on or off for ALL rules, see the <i>ESA Configuration Guide</i> .
Severity	Threat level of alert triggered by the rule.

The Rule Builder includes the following components:

- Conditions section
- Notifications section
- Enrichments section

Conditions Section

In the Conditions section of the Rule Builder tab, you define what the rule detects.

The following figure shows the Conditions section.

Conditions *

Statement	Occurs	Connector	Correlation Type	Meta	Meta
<input type="checkbox"/> Failures	5	followed by			
<input checked="" type="checkbox"/> Success	1	AND			
<input type="checkbox"/> ModifyPassword	1				

Group By: device_class, user_dst

Occurs Within: 5 minutes

Event Sequence: ☒ Strict ☐ Loose

[Investigation](#)

The following table lists the parameters of the Conditions section.

Parameter	Description
	Add a statement.
	Remove selected statement.
	Edit selected statement.
Statement	Logical group of conditions for one operation.
Occurs	Alert frequency if the condition is met. This specifies that there must be at least that many events that satisfy the criteria in order to trigger an alert. The time window in minutes binds the Occurs count.
Connector	Options to specify relationship among the statements: <ul style="list-style-type: none"> followed by not followed by AND OR The Connector joins two statements with AND, OR, followed by, or not followed by. When followed by is used, it specifies that there is a sequencing of those events. AND and OR build one large criteria. The followed by creates distinct criteria that occurs in sequence.
Correlation Type	Correlation Type applies only to followed by and not followed by . If you choose a correlation type of SAME, select one meta to correlate on, and if you choose a correlation type of JOIN, select two meta to correlate on. You may want to use JOIN if you are trying to correlate on meta from two different data sources. For example, say you want to correlate an AV alert with an IDS alert.
Meta	Enter the meta condition if choosing a correlation type of SAME or JOIN (as described above).

Parameter	Description
Meta	Enter the second meta condition if choosing a correlation type of JOIN (as described above). For example, The destination IP address from the AV alert and source IP address for the workstation from the IDS alert are joined to allow you to view the same entities across different sources.
occurs within minutes	Time window within which the conditions must occur.
Event Sequence	Choose whether the pattern must follow a <i>strict</i> match or a <i>loose</i> match. If you specify a strict match, this means that the pattern must occur in the <i>exact</i> sequence you specified with no additional events occurring in between. For example, if the sequence specifies five failed logins (F) followed by a successful login (S), this pattern will only match if the user executes the following sequence: F,F,F,F,S. If you specify a loose match, this means that other events may occur within the sequence, but the rule will still trigger if all of the specified events also occur. For example, five failed login attempts (F), followed by any number of intervening successful login attempts (S), followed by a successful login attempt might create the following pattern: F,S,F,S,F,S,F,S,F,S which would trigger the rule despite the intervening successful logins.
Group By	<p>Select the meta key by which to group results from the dropdown list. For example, suppose that there are three users; Joe, Jane, and John and you use the Group By meta, user_dst (user_dst is the meta field for the user destination account). The result will show events grouped under the user destination accounts, Joe, Jane, and John.</p> <p>You can also group by multiple keys. For example, you might want to group by user and machine to see if a user logged in from the same machine attempts to log into an account multiple times. To do this, you might group by device_class and user_dst.</p>

Notifications

In the Notifications section, you can choose how to be notified when ESA generates an alert for the rule. For more information on the alert notifications, see [Add Notification Method to a Rule](#).

The following figure shows the Notifications section.

Notifications + ⌵ - Global Notifications

Output	Notification	Notification Server	Template
<input checked="" type="checkbox"/> SYSLOG	Local_SysLog	localhost-514	Default Syslog Template

☐ Output Suppression of every minutes

Parameter	Description
+ ⌵	To add an alert notification type.
-	To delete the selected alert notification.

Parameter	Description
Output	Alert notification type. Options are: <ul style="list-style-type: none"> Email SNMP (This option is not supported in NetWitness Platform version 11.3 and later.) Syslog Script
Notification	Name of previously configured output, such as an email distribution list.
Notification Server	Name of server that sends the output.
Template	Name of template for the alert notification.
Output Suppression of every	Option to specify alert frequency.
Minutes	Alert frequency in minutes.

Enrichments

In the Enrichments section, you can add a data enrichment source to a rule.

For more information on the enrichments, see [Add an Enrichment to a Rule](#).

The following figure shows the Enrichments section.

The screenshot shows the 'Enrichments' section of the NetWitness Platform interface. At the top, there are icons for adding (+), deleting (-), and a dropdown arrow. Below this is a table with the following columns: 'Output', 'Enrichment Source', 'ESA Event Stream Meta', and 'Enrichment Source Column Name'. The 'Output' column has two rows: 'In-Memory Table' (unchecked) and 'GeoIP' (checked). The 'Enrichment Source' column has a placeholder 'Select Enrichment Source' for both rows. The 'ESA Event Stream Meta' column has a placeholder 'Enter Meta' for both rows. The 'Enrichment Source Column Name' column has a placeholder 'Enter Column Name' for the 'In-Memory Table' row and the value 'ipv4' for the 'GeoIP' row. A 'Settings' link is visible in the top right corner.

Parameter	Description
	To add an enrichment.
	To delete the selected enrichment.
Output	Enrichment source type. Options are: <ul style="list-style-type: none"> In-Memory Table External DB Reference (This option is not supported in NetWitness Platform version 11.3 and later.) Warehouse Analytics (This option is not supported in NetWitness Platform version 11.3 and later.) GeoIP

Parameter	Description
Enrichment Source	Name of previously configured enrichment source, such as a .CSV filename for an In-Memory Table.
ESA Event Stream Meta	ESA meta key whose value will be used as one operand of join condition.
Enrichment Source Column Name	Enrichment source column name whose value will be used as the other operand of the join condition. For an in-memory table, If you configured a key when creating a .CSV-based enrichment, this column automatically populates with the selected key. However, you can change it if you like. For a GeoIP enrichment source, ipv4 is automatically selected.

Debug

Select the Debug option to print alerts to the ESA logs for troubleshooting.

Syntax

Click **Show Syntax** to view the EPL syntax of conditions, statements, and debugging parameters. It also provides a warning when the syntax is invalid. For more information, see [Rule Syntax Dialog](#).

Rules Tab

The Rules tab enables you use to manage ESA rules and deployments.

What do you want to do?

Role	I want to ...	Show me how
Content Expert	View types of rules.	ESA Rule Types
Content Expert	Deploy Trial Rules.	Work with Trial Rules
Content Expert	Create a rule.	Add Rules to the Rule Library
Content Expert	Deploy a rule.	Deploy Rules to Run on ESA


Related Topics

- [Getting Started with ESA](#)

Quick Look

The Rules tab is displayed when you go to **CONFIGURE > ESA Rules**.

The following figure shows the Rules tab.

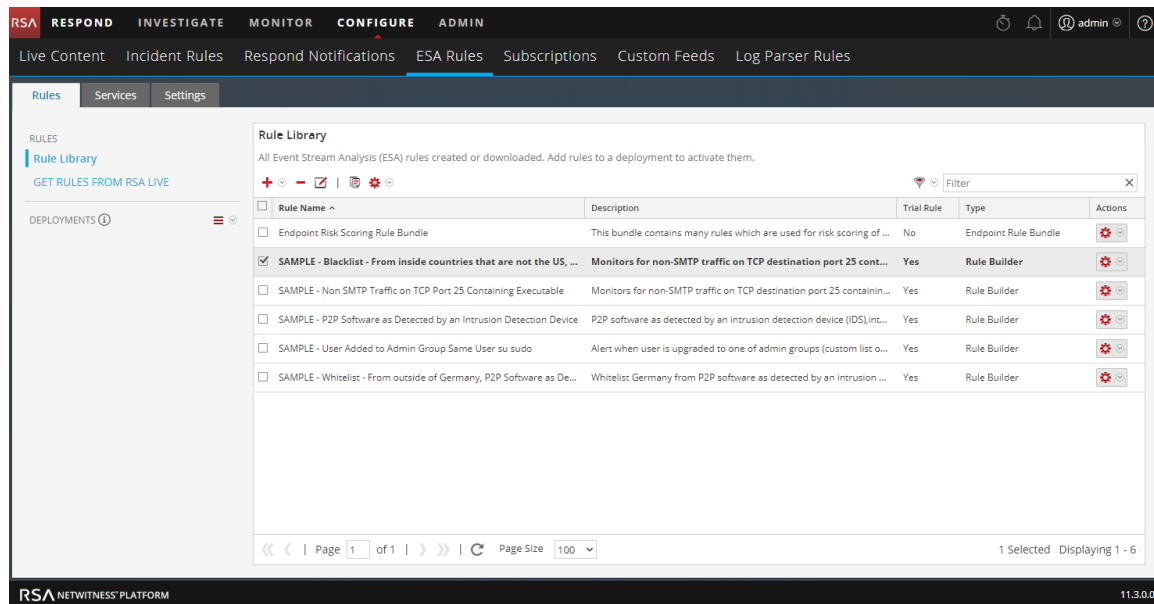

The Rules tab is divided into three sections:

- [Rules Tab Options Panel](#)
- [Rule Library Panel](#)
- [Deployment Panel](#)

Rules Tab Options Panel

In the **Rules** tab options panel to the left, you can view ESA rules in the Rule Library and create ESA rule deployments.

What do you want to do?


Role	I want to ...	Show me how
Content Expert	View an ESA rule.	Add Rules to the Rule Library
Content Expert	Create an ESA rule deployment.	ESA Rule Deployment Steps

Related Topics

- [Working with Rules](#)

Options Panel

The following figure shows the options panel in the **Rules** tab.

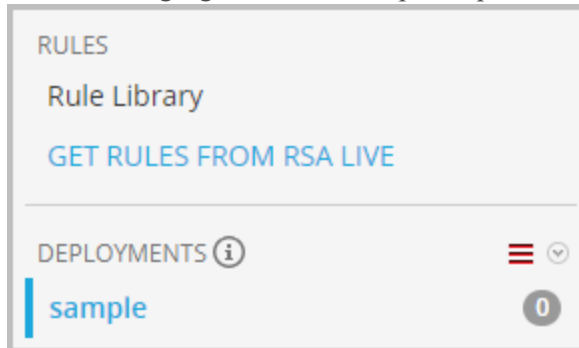




There are two sections in the options panel: Rules and Deployments.

Rules Section

The Rules section contains two options. **Rule Library** is selected by default, and when it's selected, the Rule Library view is displayed within the tab. **Get Rules From RSA Live** navigates to the Live Search view, where you can search for rules.

Deployments Section

The Deployments section lists ESA rule deployments and indicates whether there are updates to the deployments. From this section, deployments can be added, deleted, edited, and refreshed. Selecting a deployment from the list displays the Deployment panel within the tab. The following table describes the features of this section.

Feature	Description
	Displays a drop-down menu from which you can choose to add, edit, or delete an ESA rule deployment. You can also refresh the list of deployments to see if there are any new updates to the list.
	Indicates whether there are any updates to the deployment.
	Indicates the number of rules in the deployment.

Rule Library Panel

The Rule Library panel allows you to manage rules.

What do you want to do?

Role	I want to ...	Show me how
Content Expert	Add an ESA rule.	Add a Rule Builder Rule
Content Expert	Edit, duplicate, or delete an ESA rule.	Edit, Duplicate or Delete a Rule
Content Expert	Import or export ESA rules.	Import or Export Rules
Content Expert	Filter the ESA rules list.	Filter or Search for Rules


Related Topics

- [Add an Advanced EPL Rule](#)

Rule Library Panel

To access this view, go to **CONFIGURE > ESA Rules**. The Rules tab is displayed and the Rule Library panel is on the right.

The following figure shows the Rule Library panel.

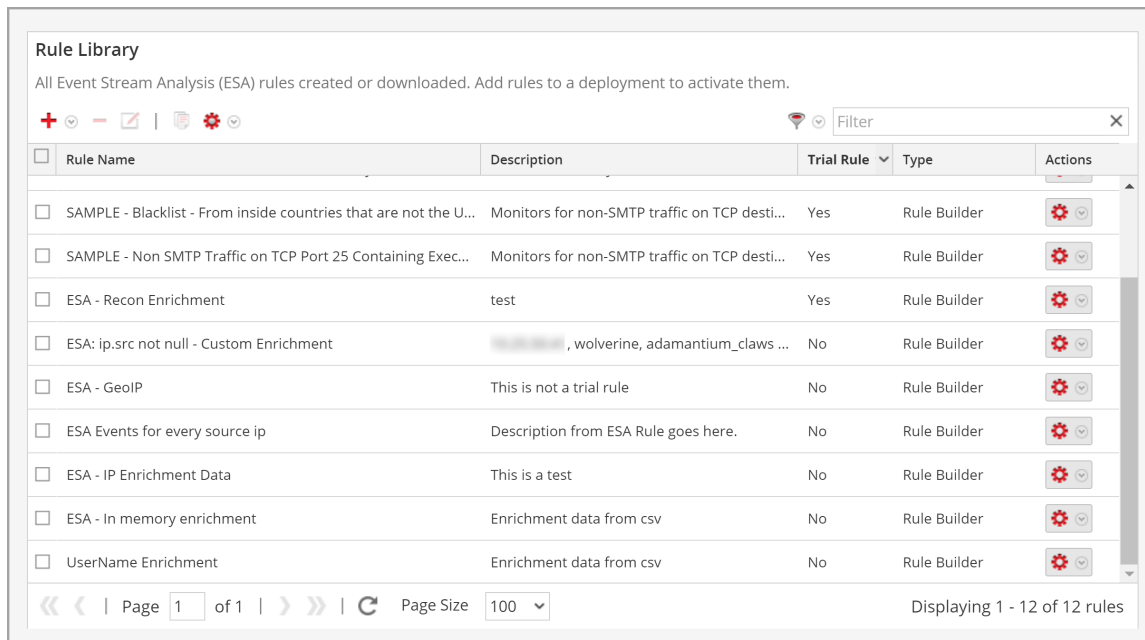

The Rule Library panel includes the following components:

- Rule Library toolbar
- Rule Library list

Rule Library Toolbar

The Rule Library toolbar allows you to add, delete, edit, duplicate, filter, export, and import ESA rules. The following figure shows the icons for these actions.



Rule Library List

The following figure shows the Rule Library list.

<input type="checkbox"/>	Rule Name	Description	Trial Rule	Type	Actions
<input type="checkbox"/>	SAMPLE - Blacklist - From inside countries that are not the U...	Monitors for non-SMTP traffic on TCP desti...	Yes	Rule Builder	
<input type="checkbox"/>	SAMPLE - Non SMTP Traffic on TCP Port 25 Containing Exec...	Monitors for non-SMTP traffic on TCP desti...	Yes	Rule Builder	
<input type="checkbox"/>	ESA - Recon Enrichment	test	Yes	Rule Builder	
<input type="checkbox"/>	ESA: ip.src not null - Custom Enrichment	, wolverine, adamantium_claws ...	No	Rule Builder	
<input type="checkbox"/>	ESA - GeoIP	This is not a trial rule	No	Rule Builder	
<input type="checkbox"/>	ESA Events for every source ip	Description from ESA Rule goes here.	No	Rule Builder	
<input type="checkbox"/>	ESA - IP Enrichment Data	This is a test	No	Rule Builder	
<input type="checkbox"/>	ESA - In memory enrichment	Enrichment data from csv	No	Rule Builder	
<input type="checkbox"/>	UserName Enrichment	Enrichment data from csv	No	Rule Builder	


« | Page 1 of 1 | » | Page Size 100 | Displaying 1 - 12 of 12 rules

The Rule Library list shows all of the ESA rules. The following table lists the columns in the Rule Library list and their description.

Column	Description
Rule Name	Purpose of the ESA rule.
Description	Summary of what the ESA rule detects.
Trial Rule	Deployment mode to see if the rule runs efficiently.
Type	The type of rule. For more information, see ESA Rule Types .
Actions ()	Menu to delete, edit, duplicate, or export the selected rule.
Severity	Threat level of alert triggered by the rule.
Email	Indicates whether an alert notification for the rule is sent by email. This column is not visible by default.

Column	Description
SNMP	Indicates whether an alert notification for the rule is sent using SNMP. This column is not visible by default. (ESA SNMP notifications are not supported in NetWitness Platform version 11.3 and later.)
Syslog	Indicates whether an alert notification for the rule is sent using Syslog. This column is not visible by default.
Script	Indicates whether an alert notification for the rule executes a script. This column is not visible by default.
Last Modified	The date and time when the ESA rule was last modified. This column is not visible by default.

To display columns which aren't visible by default, hover over the title of a column and click the **v** on the right. This opens a drop-down menu in which you can sort the contents of the column or choose which columns you want to see in the Rule Library list.

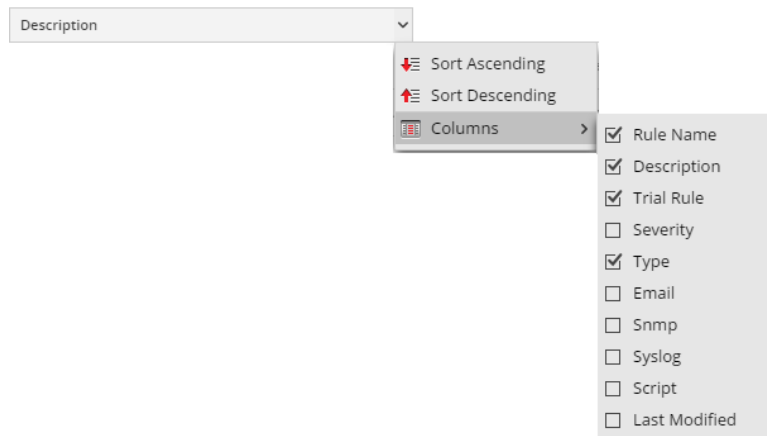

Deployment Panel

ESA rule deployments map rules from your rule library to the appropriate ESA Services and data sources. The Deployment panel (CONFIGURE > ESA Rules > Rules tab) enables you to create and configure ESA rule deployments that specify:

- ESA Services
- Data Sources (This is available in NetWitness Platform version 11.3 and later.)
- ESA Rules

When you are ready to start aggregating data and generating alerts from an ESA rule deployment, you deploy the ESA rule deployment to activate it.

Note: An ESA rule deployment can have only one ESA service. You can, however, use the same ESA service in multiple deployments.
In NetWitness Platform version 11.2 and earlier, the ESA service is the Event Stream Analysis service. In version 11.3 and later, it is the ESA Correlation service.

What do you want to do?


Role	I want to ...	Show me how
Content Expert	Add an ESA rule deployment.	ESA Rule Deployment Steps
Content Expert	Manage deployments.	Additional ESA Rule Deployment Procedures

Related Topics

- [View Stats for an ESA Service](#)

Deployment Panel

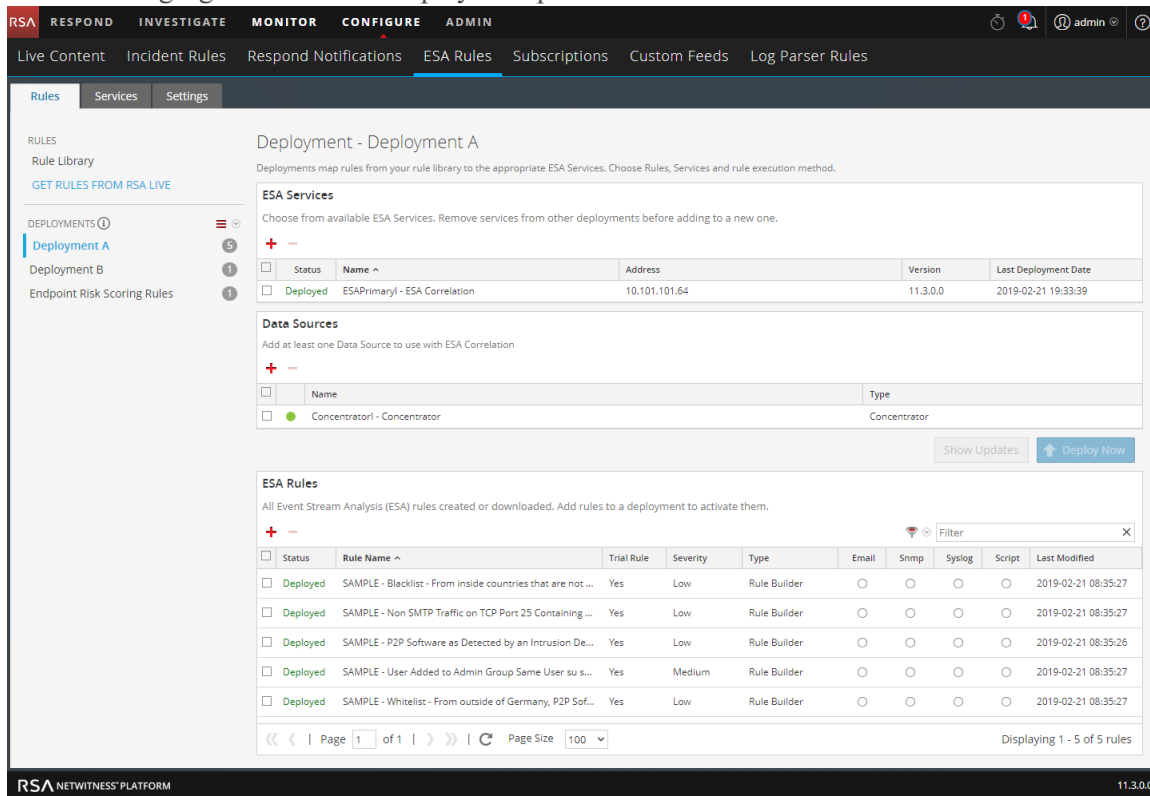

The following figure shows the Deployment panel.



ESA Services

In the ESA Services section, you can manage each ESA service in the deployment.

The following table describes the actions you can perform in the ESA Services section.

Task	Description
	Adds an ESA service to the deployment.
	Removes the selected ESA service from the deployment.

The following table describes the columns in the ESA Services section.

Title	Description
Status	Indicates if the deployment status is Added , Deployed , Updated , or Failed .
Name	Name of the ESA service.
Address	IP address of the host where the ESA service is installed.



Title	Description
Version	Version of the ESA service.
Last Deployment Date	The date and time when the ESA service was last deployed.

Data Sources

Note: This option is available in NetWitness Platform version 11.3 and later.

In the Data Sources section, you can select one or more data sources, such as Concentrators, to use for your selected ESA Service.

The following table describes the actions you can perform in the Data Sources section.

Task	Description
	Adds a data source for the selected ESA service to the deployment.
	Removes a data source for the selected ESA service from the deployment.

The following table describes the columns in the Data Sources section.

Title	Description
(Status)	Shows the status of the data source. A solid colored green circle indicates a running service and a white circle indicates a stopped service.
Name	Shows the name of the data sources used by the selected ESA service. You can specify the data sources separately for each ESA rule deployment.
Type	Shows the type of the data sources. Data sources can be Concentrators or Decoders. It is important that you choose data sources that have the appropriate data for the rules in the deployment. For example, if you have NetWitness Endpoint and you want to deploy the Endpoint Risk Scoring Rules Bundle, you must choose endpoint data sources.

Note: You can add a Log Decoder as a data source for ESA, but it is better to add a Concentrator to take advantage of undivided aggregation as the Decoder may have other processes aggregating from it.

Deployment Options

There are two deployment options below the Data Sources section. These options apply to the entire ESA rule deployment.

The following table describes these deployment options.





Task	Description
Show Updates	Enables you to view a history of updates to the deployment.

Task	Description
Deploy Now	Activates the ESA rule deployment. The selected ESA service starts aggregating data and generating alerts using the specified ESA rules in the deployment. You need to add ESA Rules to the deployment before deploying the ESA rule deployment.

ESA Rules

In the ESA Rules section, you manage rules in the deployment. This section lists all rules that are currently in the deployment.

The following table describes the actions you can perform in the ESA Rules section.

Task	Description
	Opens the Deploy ESA Rules dialog, where you can select a rule.
	Removes the selected ESA rules from the deployment.
	Filters the list of rules.
	Enables you to search for a rule.

The following table describes the columns in the ESA Rules section.




Title	Description
Status	Indicates the rule status: <ul style="list-style-type: none"> • Deployed - the rule is deployed. • Updated - the rule has been updated since the last deployment. • Added - the rule has been added since the last deployment. • Failed - the deployment failed.
Rule Name	Describes the purpose of the ESA rule.
Trial Rule	Indicates whether the rule is Deployment mode to see if the rule runs efficiently.
Severity	Shows the threat level of alert triggered by the rule.
Type	Shows the type of the ESA rule. For more information, see ESA Rule Types .
Email, SNMP, Syslog, Script	Indicates which notification types are used for alerts generated by the rules. (ESA SNMP notifications are not supported in NetWitness Platform version 11.3 and later.)
Last Modified	Shows the date and time when the ESA rule was last modified.

Rule Syntax Dialog

This topic describes the features of the Rule Syntax dialog. The Rule Syntax dialog displays the EPL syntax of conditions, statements, and debugging parameters, and provides a warning when the syntax is invalid.


Rule Syntax Dialog

To access this dialog:

1. Go to **CONFIGURE > ESA Rules**.
2. In the **Rule Library** view, do one of the following:
 - a. Click  and select **Advanced EPL** or **Rule Builder**.
 - b. Double-click an existing rule.
 - c. Select an existing rule and click  in the **Rule Library** toolbar.
 - d. In the row of an existing rule, select  > **Edit**.

The new or existing rule is displayed in a new tab, available to edit.
3. Click **Show Syntax** at the bottom of the tab.

The following figure shows an example of the Rule Syntax dialog showing a valid rule.

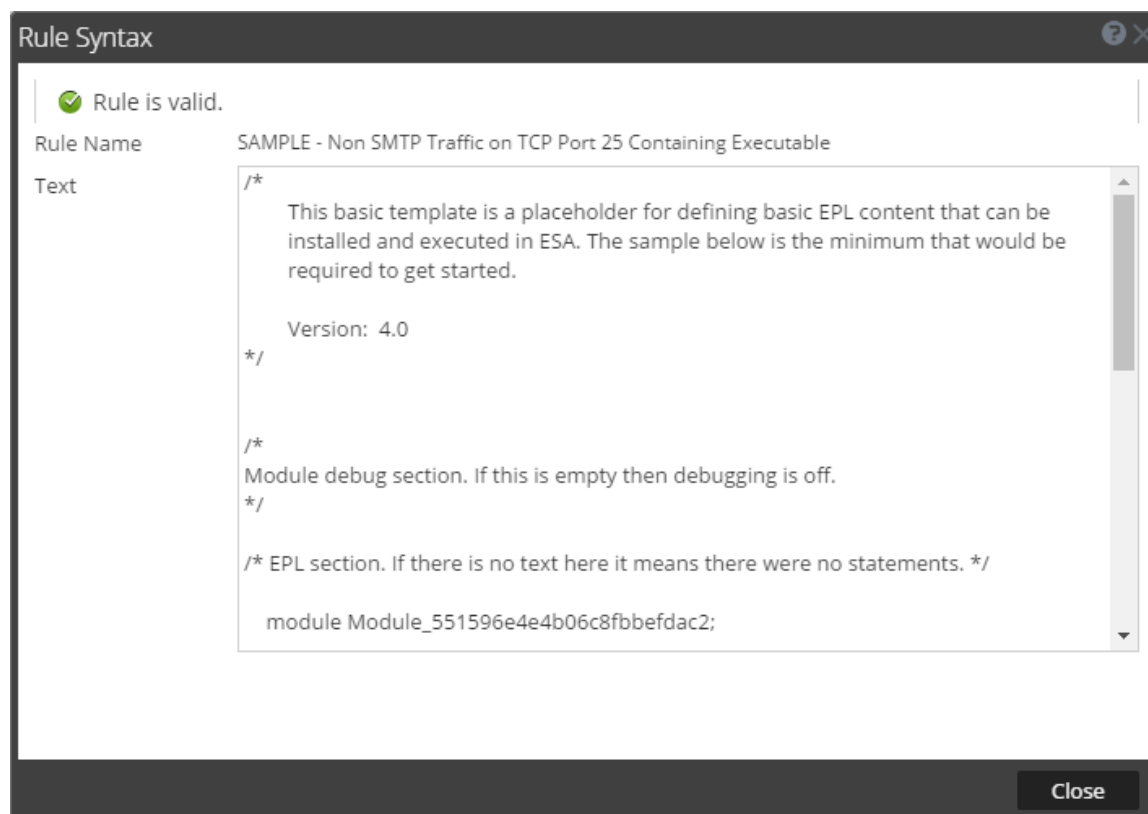

The following table describes the Rule Syntax dialog parameters.

Parameters	Description
Rule is valid or Validation error in rule	Indicates whether the rule syntax is valid or needs to be changed.
Rule Name	Displays the name of the rule.
Text	Displays the EPL syntax of conditions, statements, and debugging parameters if the rule is valid.

Services Tab

This topic provides an overview of the **CONFIGURE > ESA Rules > Services** tab. The Services tab provides details of the ESA services added to NetWitness Platform.

What do you want to do?

Role	I want to ...	Show me how
Content Expert	Troubleshoot Services Tab.	Troubleshoot ESA
Content Expert	View deployment Stats for an ESA Service.	View Stats for an ESA Service

Related Topics

- [View a Summary of Alerts](#)

Services

The following figure shows the Services tab:

The screenshot displays the NetWitness Platform interface. The top navigation bar includes tabs for RESPOND, INVESTIGATE, MONITOR, CONFIGURE (active), and ADMIN. The CONFIGURE tab is further divided into sub-tabs: Live Content, Incident Rules, Respond Notifications, ESA Rules (active), Subscriptions, Custom Feeds, and Log Parser Rules. The left sidebar shows the 'Services' tab selected, with a list of services including 'SESA - ESA Correlation'. The main content area shows the configuration for 'SESA - ESA Correlation'. It includes a 'Deployment A' tab, 'Engine Stats' (Esper Version 7.1.0, Time 2019-02-07T18:51:34, Events Offered 10477, Offered Rate 0 per second / 71 max, Status Active), 'Rule Stats' (Rules Enabled 4, Rules Disabled 0, Events Matched 0), and 'Alert Stats' (Notifications 0, Message Bus 0). Below this is a 'Deployed Rule Stats' section with a table of rules. The table has columns for Enable, Name, Rule Type, Trial Rule, Last Detected, Events Matched, and Memory Usage. Four rules are listed, all with 'Yes' for Trial Rule and 0 for Events Matched. The bottom of the interface shows pagination: 'Page 1 of 1' and 'Page Size 100'. The footer indicates 'RSA NETWITNESS PLATFORM 11.3.0.0'.


(This option is available in NetWitness Platform version 11.3 and later.) If an ESA Correlation service has multiple deployments, under the service name, you will see a tab for each deployment. In the above example, there are two deployment tabs, Deployment A and Deployment B. Each tab displays information specific to that deployment.

The Services tab has the following sections:

- ESA Services panel (on the left)
- General Stats panel (top right)
- Deployed Rule Stats panel (bottom right)

ESA Services Panel

The ESA Services panel lists the name of each ESA service added to NetWitness Platform.

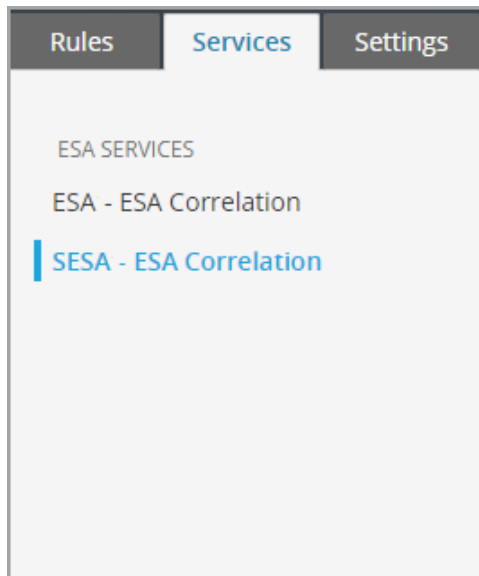

General Stats Panel

The General Stats panel provides information on the Esper engine, rules, and alerts.

The General Stats panel contains the following sections:

- Engine Stats
- Rule Stats
- Alert Stats

The following figure shows the General Stats panel.

SESA - ESA Correlation					
Deployment A		Deployment B			
Engine Stats		Rule Stats		Alert Stats	
Esper Version	7.1.0	Rules Enabled	4	Notifications	0
Time	2019-02-07T18:51:34	Rules Disabled	0	Message Bus	0
Events Offered	10477	Events Matched	0		
Offered Rate	0 per second / 71 max				
Status	Active				

The following table lists and describes the parameters in each section.

Sections	Parameter	Description
Engine Stats	Esper Version	Esper version running on the ESA service
	Time	Time when the last event was sent to Esper Engine
	Events Offered	Number of events processed by the ESA service since the last service start
	Offered Rate	The rate that the ESA service processes current events / The maximum rate that the ESA service processed events.
	Status	Shows the status of the deployment. A status of Active means that the deployment is active. A status of Inactive means that there was probably an error starting the deployment. Check the error log file for more information: <code>/var/log/netwitness/correlation-server/correlation-server.log</code> .
Rule Stats	Rules Enabled	Number of rules enabled
	Rules Disabled	Number of rules disabled
	Events Matched	Total number of events matched to all rules on the ESA service
Alert Stats	Notifications	The total number of notifications sent by email, SNMP, syslog, or script for the deployment. (ESA SNMP notifications are not supported in NetWitness Platform version 11.3 and later.)
	Message Bus	The total number of alerts sent to Respond for the deployment

Deployed Rule Stats Panel

The Deployed Rule Stats panel provides details on the rules that are deployed on the ESA service.

The following figure shows the Deployed Rule Stats panel.

Deployed Rule Stats							
<input checked="" type="radio"/> Enable <input type="radio"/> Disable		See Health & Wellness to monitor overall memory usage.					
<input type="checkbox"/>	Enable	Name ^	Rule Type	Trial Rule	Last Detected	Events Matched	Memory Usage
<input checked="" type="checkbox"/>	<input checked="" type="radio"/>	Accesses Administrative Share Using Com...	Endpoint	No		0	0 bytes
<input type="checkbox"/>	<input checked="" type="radio"/>	Activates BITS Job	Endpoint	No	2019-02-06 14:14:30	3	0 bytes
<input type="checkbox"/>	<input checked="" type="radio"/>	Adds Files To BITS Download Job	Endpoint	No		0	0 bytes
<input type="checkbox"/>	<input checked="" type="radio"/>	Adds Firewall Rule	Endpoint	No		0	0 bytes
<input type="checkbox"/>	<input checked="" type="radio"/>	Allocates Remote Memory	Endpoint	No		0	0 bytes
<input type="checkbox"/>	<input checked="" type="radio"/>	Antivirus Disabled	Endpoint	No	2019-02-06 14:14:33	10	0 bytes
<input type="checkbox"/>	<input checked="" type="radio"/>	Archiving Software Reads Multiple Documents	Endpoint	No		0	0 bytes
<input type="checkbox"/>	<input checked="" type="radio"/>	Autorun	Endpoint	No		0	0 bytes
<input type="checkbox"/>	<input checked="" type="radio"/>	Autorun File Path Not Part Of RPM	Endpoint	No		0	0 bytes
<input type="checkbox"/>	<input checked="" type="radio"/>	Autorun Key Contains Non-Printable Charact...	Endpoint	No		0	0 bytes

<< < | Page 1 of 5 | > >> | Page Size 100

1 Selected Displaying 1 - 100 of 401

The table lists the various parameters in the view and their description.

Parameters	Description
<input checked="" type="radio"/> Enable	Enables a rule that was disabled.
<input type="radio"/> Disable	Disables a rule that was enabled.
Health & Wellness link	Enables you to monitor overall memory usage and health of your ESA Correlation service.
Enable	Indicates whether the rule is enabled or disabled. A green circle icon <input checked="" type="radio"/> indicates that the rule is enabled. A white circle icon <input type="radio"/> indicates that the rule is disabled.
Name	Name of the ESA rule.
Rule Type	(This field applies to version 11.3 and later.) Endpoint indicates a rule from the Endpoint Risk Scoring Bundle and Esper indicates Esper-specific rules, such as Rule Builder and Advanced EPL rules.
Trial Rule	Indicates if the rule is running in trial rule mode.
Last Detected	The last time alert was triggered for the rule.
Events Matched	The total number of events that matched the rule.
Memory Usage	The total amount of memory used by the rule. Note: The Endpoint Risk Scoring Rules Bundle rules do not show memory usage.

Settings Tab

This topic describes the components of the **CONFIGURE > ESA Rules > Settings** tab. In the Settings tab, you can perform the following tasks:

- View a list of meta keys
- Configure a data enrichment source
- Add a connection to an external database (This option applies to NetWitness Platform version 11.2 and earlier.)

What do you want to do?

Role	I want to ...	Show me how
Content Expert	Configure a connection to an external database. (This option applies to NetWitness Platform version 11.2 and earlier.)	See "Configure a Database Connection" in the NetWitness Platform 11.2 <i>Alerting with ESA Correlation Rules User Guide</i> .
Content Expert	Configure a database as an enrichment source. (This option applies to NetWitness Platform version 11.2 and earlier.)	See "Enrichment Sources" in the NetWitness Platform 11.2 <i>Alerting with ESA Correlation Rules User Guide</i> .
Content Expert	Configure an in-memory table as an enrichment source.	Configure In-Memory Table as an Enrichment Source
Content Expert	Configure a Context Hub list as an enrichment source.	Configure Context Hub List as an Enrichment Source

Related Topics

- [Add a Data Enrichment Source](#)

Settings

The following figure shows the Meta Key References section in the Settings tab.

The screenshot displays the 'Meta Key References' section within the RSA NetWitness Platform's 'Settings' tab. The interface includes a top navigation bar with tabs for Respond, Investigate, Monitor, Configure, and Admin. Below this, a secondary navigation bar lists various configuration areas: Live Content, Incident Rules, Respond Notifications, ESA Rules (selected), Subscriptions, Custom Feeds, Log Parser Rules, and Certificates. The left sidebar shows a hierarchy of settings: MISCELLANEOUS, Meta Key References (selected), Enrichment Sources, and Database Connections. The main content area is titled 'Meta Key References' and features a table with two columns: 'Name' and 'Type'. The table lists 25 meta keys, including OS, access_point, accesses, action, ad_computer_dst, ad_computer_src, ad_domain_dst, ad_domain_src, ad_username_dst, ad_username_src, agent_id, alert, alert_id, alias_host, alias_ip, alias_ip6, alias_mac, analysis_all, analysis_file, and analysis_service. The bottom of the page shows pagination controls: 'Page 1 of 20' and 'Page Size 25', along with a status message 'Displaying 1 - 25 of 488 Meta Key References'.

Name	Type
OS	string
access_point	string
accesses	string
action	string[]
ad_computer_dst	string
ad_computer_src	string
ad_domain_dst	string
ad_domain_src	string
ad_username_dst	string
ad_username_src	string
agent_id	string
alert	string
alert_id	string
alias_host	string[]
alias_ip	string[]
alias_ip6	string[]
alias_mac	string
analysis_all	string
analysis_file	string[]
analysis_service	string[]

Meta Key References


The Meta Key References section lists each meta key and the type of value the key requires.

Enrichment Sources

In the Enrichment Sources section, you can configure the following external data sources:

- GeoIP
- External Database Reference (This option applies to NetWitness Platform version 11.2 and earlier.)
- In-Memory Table
- Warehouse Analytics (This option applies to NetWitness Platform version 11.2 and earlier.)
- Context Hub

The following figure shows the Enrichment Sources section in the Settings tab.

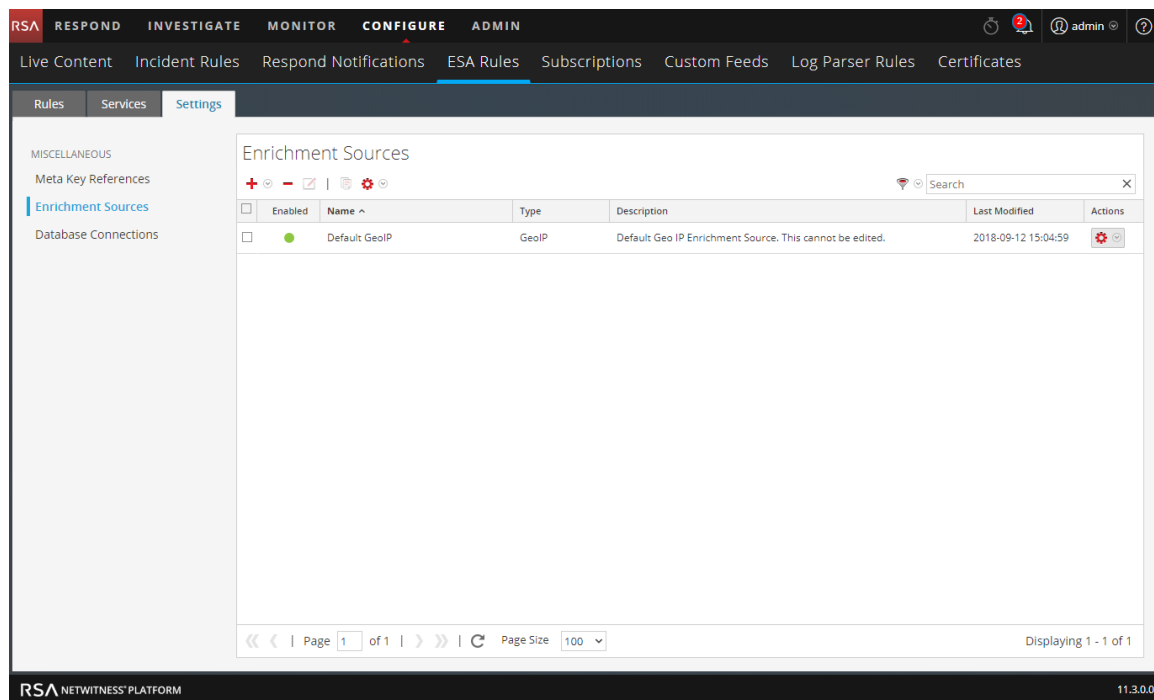


Database Connections

Note: This section applies to RSA NetWitness® Platform Version 11.2 and earlier.

In the Database Connections section, you can configure a connection to an external database so ESA can access that data.


The following figure shows the Database Connections section in the Settings tab.

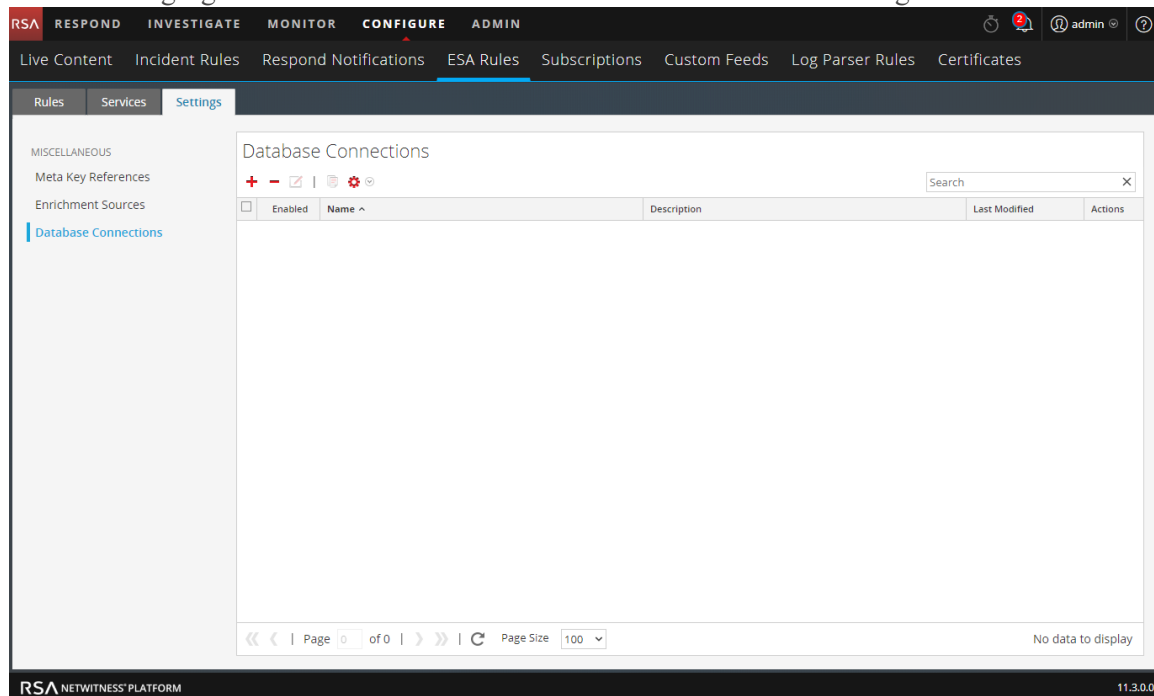

In the Database Connections section you can perform the following:

- Add a Database Connection
- Delete a Database Connection
- Edit a Database Connection
- Duplicate a Database Connection
- Import a Database Connection
- Export a Database Connection

Updates to the Deployment Dialog

The Updates to the Deployment dialog displays changes to the deployment, such as adding a rule or service. Deployment updates are indicated by the update icon () next to the name of the deployment in the Rules tab options panel.

What do you want to do?

Role	I want to ...	Show me how
Content Expert	Deploy rules to run on ESA.	ESA Rule Deployment Steps
Content Expert	Edit or delete an ESA rule deployment.	Edit the ESA Rule Deployment Name or Delete a Deployment
Content Expert	View deployment updates.	Show Updates to an ESA Rule Deployment

Related Topics


- [Replace an ESA Service in an ESA Rule Deployment](#)
- [Add or Remove a Data Source](#)
- [Edit or Delete a Rule in a Deployment](#)

Deployment Dialog

To access this dialog:

1. Go to **CONFIGURE > ESA Rules**.
The Rules tab opens by default.
2. In the options panel, under the **Deployments** section, select or add a deployment.
3. In the **Deployment** panel, click **Show Updates**.
The Updates to the Deployment dialog is displayed.

The following figure is an example of this dialog.

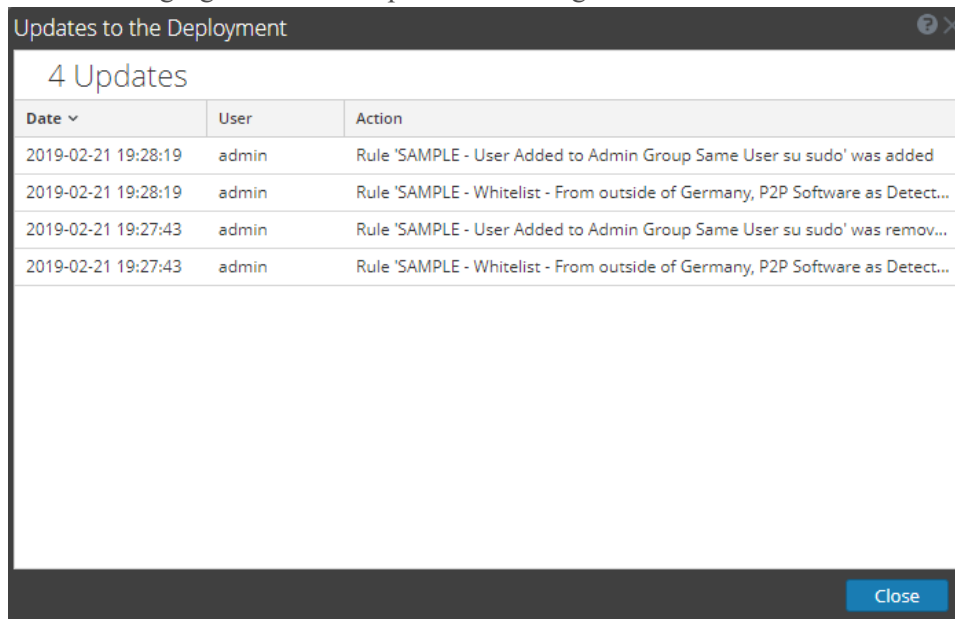

The Updates to the Deployment dialog displays the number of updates at the top of the dialog. The following table describes the parameters of this dialog.

Parameters	Description
Date	Displays the day and time of the update.
User	Displays the user who made the update.
Action	Describes the update.