



RSA[®] NetWitness Platform

Version 11.6

Logstash and NetWitness Integration Guide



Contact Information

RSA Link at <https://community.rsa.com> contains a knowledge base that answers common questions and provides solutions to known problems, product documentation, community discussions, and case management.

Trademarks

RSA Conference Logo, RSA, and other trademarks, are trademarks of RSA Security LLC or its affiliates ("RSA"). For a list of RSA trademarks, go to <https://www.rsa.com/en-us/company/rsa-trademarks>. Other trademarks are trademarks of their respective owners.

License Agreement

This software and the associated documentation are proprietary and confidential to RSA Security LLC or its affiliates are furnished under license, and may be used and copied only in accordance with the terms of such license and with the inclusion of the copyright notice below. This software and the documentation, and any copies thereof, may not be provided or otherwise made available to any other person.

No title to or ownership of the software or documentation or any intellectual property rights thereto is hereby transferred. Any unauthorized use or reproduction of this software and the documentation may be subject to civil and/or criminal liability.

This software is subject to change without notice and should not be construed as a commitment by RSA.

Third-Party Licenses

This product may include software developed by parties other than RSA. The text of the license agreements applicable to third-party software in this product may be viewed on the product documentation page on RSA Link. By using this product, a user of this product agrees to be fully bound by terms of the license agreements.

Note on Encryption Technologies

This product may contain encryption technology. Many countries prohibit or restrict the use, import, or export of encryption technologies, and current use, import, and export regulations should be followed when using, importing or exporting this product.

Distribution

Use, copying, and distribution of any RSA Security LLC or its affiliates ("RSA") software described in this publication requires an applicable software license.

RSA believes the information in this publication is accurate as of its publication date. The information is subject to change without notice.

THE INFORMATION IN THIS PUBLICATION IS PROVIDED "AS IS." RSA MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND WITH RESPECT TO THE INFORMATION IN THIS PUBLICATION, AND SPECIFICALLY DISCLAIMS IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

© 2020 RSA Security LLC or its affiliates. All Rights Reserved.

May 2021

Contents

Overview	5
Configuration Process	7
Install Logstash	9
Install and Configure the NetWitness Codec	10
Configure Logstash Output Plugins	12
Logstash TCP Output	12
Logstash TLS Output	12
TLS with Log Decoder (or Virtual Log Collector) Verification	12
Configure the Event Source	14
Collect Apache File Logs	14
Collect CentOS Audit Logs	14
Configure Parameters for Filebeat or Auditbeat	14
Configure Logstash Filters to Add NetWitness Meta	16
Advanced NetWitness Platform Configuration	17
Grok Filter Plugin	17
Logstash Input and Filter plugins	17
Filter out unwanted logs	17
Configure heartbeat plugin to send test logs to NetWitness	17
Configure logstash to persist events in case of failure (Recommended)	18
NetWitness Platform Codec Advanced Configuration	18
Troubleshoot Installation Issues	18
Configure NetWitness Platform to Collect Events	19
Linux Event Source Example	20
Input Plugin	20
Output Plugin	20
Filter Plugin	21
Create a Pipeline	21
Build Custom JSON Parser	22
Sample JSON Log Received on Log Decoder	22
Create the JSON Parser for a Linux Device	23
Initial Parser to Match Message ID and Device Type	23
Map Payload Contents to Datatypes	23
Parse the Message String	23
Parse an Array in JSON	24

Parse a Nested JSON Object	25
Capture Data That Has Varying Parent Key	25
The Parsed Example Event on the Log Decoder	26
Example Parser Listing	26
Deploy JSON parser	28
Reload Parsers from REST	28
Reload Parsers from NetWitness Platform UI	28

Overview

This document is intended to provide a general overview of Logstash and NetWitness Platform integration. The intention is to provide enough implementation detail that users can have comfort using and troubleshooting these integrations on their own.

To describe Logstash, here is some introductory text from [Logstash reference documentation](#):


Logstash is an open source data collection engine with real-time pipelining capabilities. Logstash can dynamically unify data from disparate sources and normalize the data into destinations of your choice...

From a NetWitness Platform standpoint, there are two basic use cases:

- For customers that have an event source for which RSA NetWitness Platform does not already provide an integration, or if you want a customized integration that is different from the one provided by RSA.
- For customers that already have an existing Logstash configuration, you can use Logstash to integrate as many of your event sources as you like. Integrating your event sources should be a matter of updating the destination for where you currently send the log information: either adding NetWitness Platform as a destination, or changing your current output destination to NetWitness.


Note: From 11.6 onwards, the Logstash server is packaged and supported along with the NetWitness Log Collector or Virtual Log Collector (VLC) service to provide easy access to Logstash. This is referred to as Managed Logstash and it eliminates the need for a separate Logstash server outside of the NetWitness Platform. For more information, see [Configure Logstash Event Sources in NetWitness Platform](#) in the *Log Collection Configuration Guide*.

The following diagram displays a view of how Logstash integrates with the NetWitness Platform.

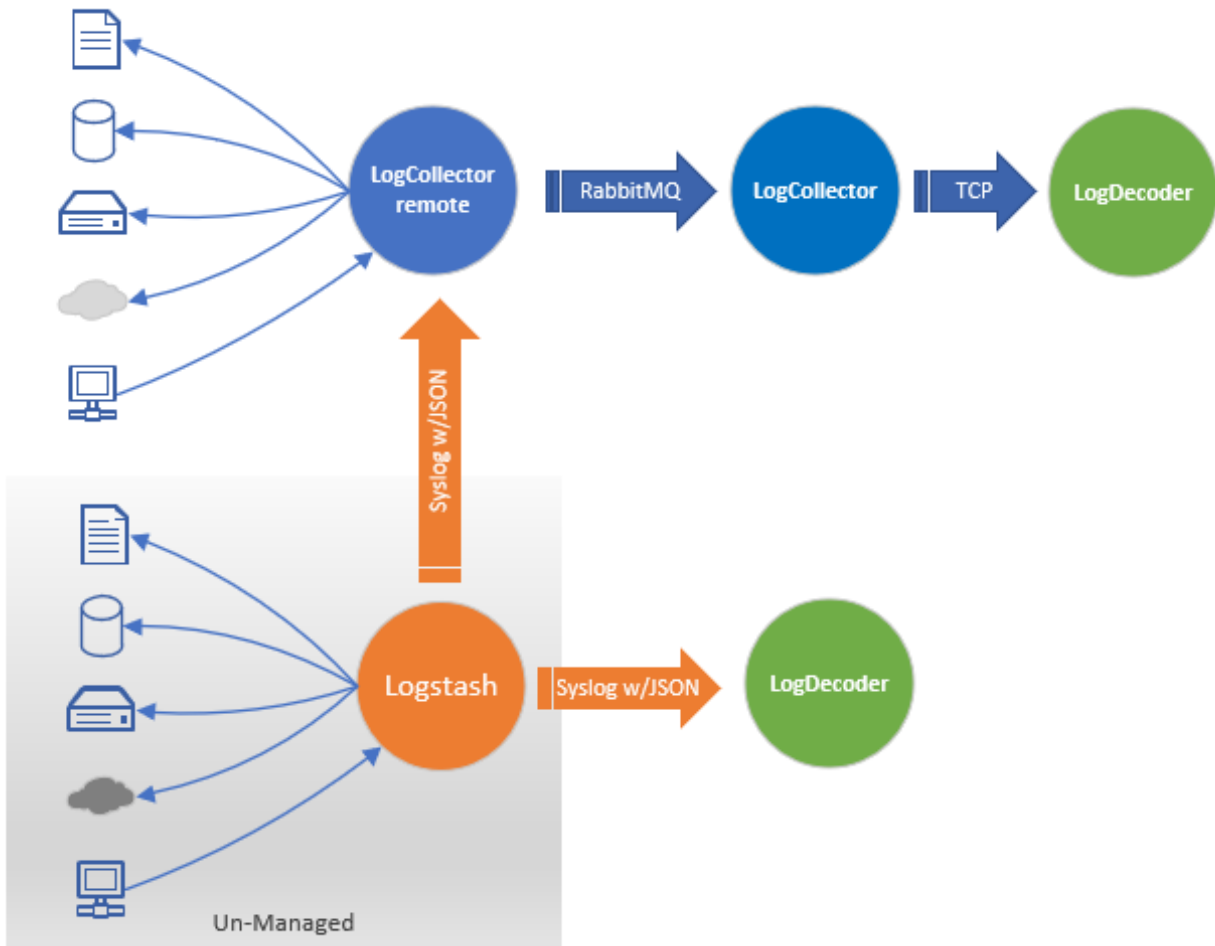


Configuration Process

The following flowchart describes the steps customers take to integrate Logstash with NetWitness Platform, depending on their prior familiarity with and use of Logstash.

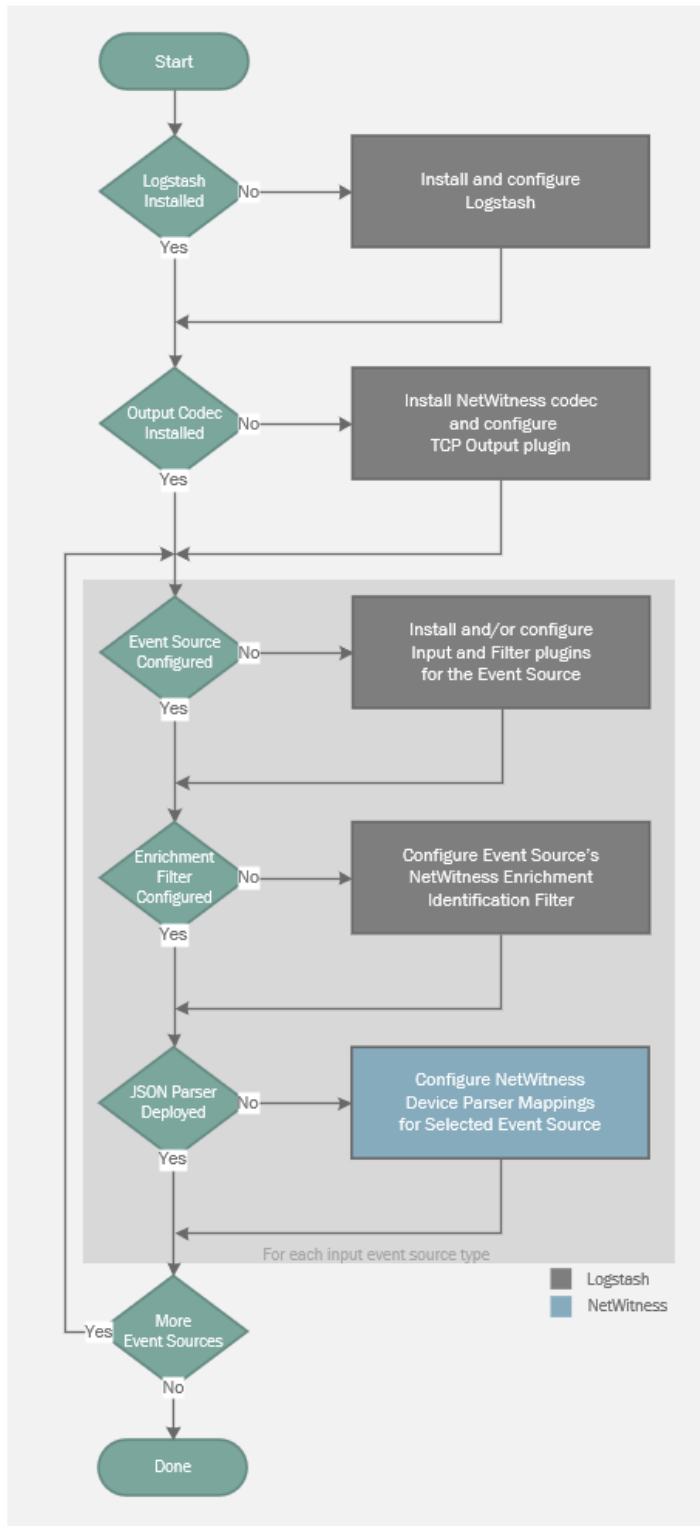

The following sequence describes the data flow from an event until it becomes NetWitness meta in a Log Decoder.

1. An event source generates events.
2. The collection plugin (for example a Beats plugin) collects events from the event source.
3. Logstash processes the data from the events.
4. A NetWitness codec encodes the Logstash-processed data into a format that can be consumed by NetWitness Platform.
5. An output plugin sends the processed event data to the NetWitness Platform.
6. A JSON parser populates meta from the processed event data.

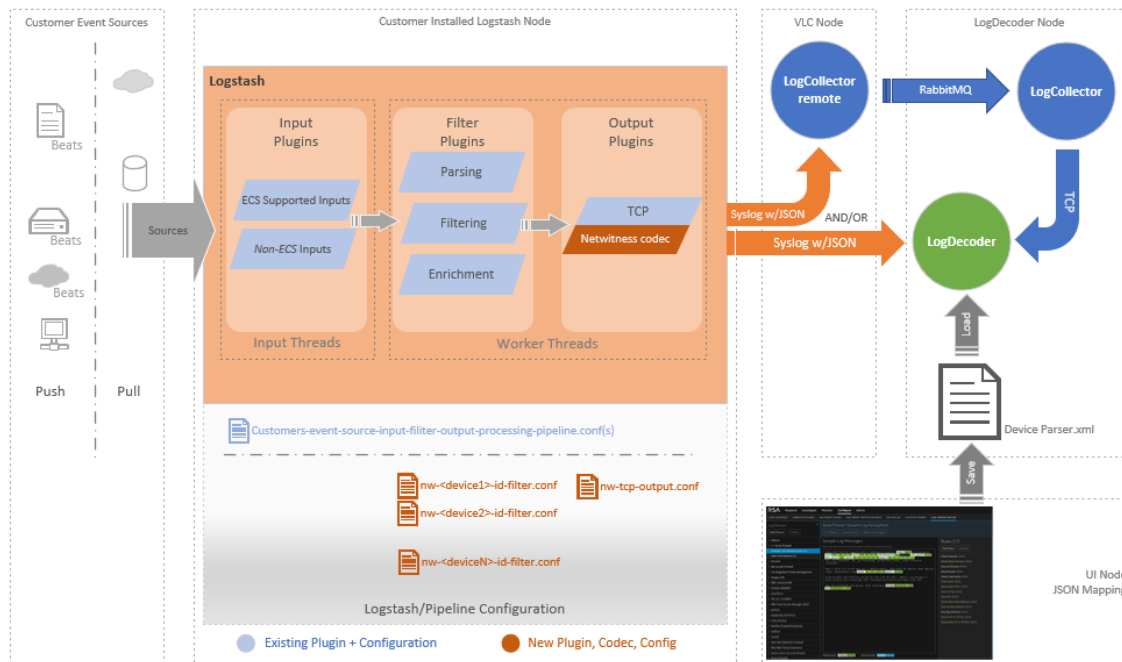

Install Logstash

Skip this section if you already have Logstash installed and configured.

IMPORTANT: Please ensure that you follow all the security-related best practices and guidelines outlined in the Logstash documentation to avoid any potential security risks.

You can install either the free, open source version of Logstash (OSS) or the paid version (Elastic).

Information on released versions of Logstash is available at [Logstash Reference](#). Links in the following steps show an example of installing current version of Logstash on Linux.

1. Install the service: [Installing Logstash \(OSS free version\)](#)
2. Based on your OS, after installation do one of the following:
 - Linux: set Logstash to run as a service: [Running Logstash](#)
 - Windows: see [Running Logstash on Windows](#)
3. Next, enable Logstash to start when the system boots up:
 - For CentOS, see <https://www.unix.com/man-page/centos/1/systemctl/>
 - For Debian, see <https://wiki.debian.org/systemd/documentation>

Those are 2 examples: adjust instructions according to your particular Operating System.

For Generic Troubleshooting Instructions for Logstash, follow this link: [Logstash Troubleshooting](#)

If you are using CentOS, note the following:

- Logstash logs are stored in `/var/log/logstash/logstash-plain.log`
- If you install logstash using rpm install, make sure it installs as logstash user and folders get created with the same user: **not** the root user.

Install and Configure the NetWitness Codec

To forward Logstash events to the NetWitness Platform in RFC-5424 format, you need to install the NetWitness codec on your system and refer to it in your output plugin configuration..

To install or update the codec:

Note: The following procedure can be performed on either Linux or Windows: instructions that are specific to an OS are noted.

1. Download offline installer from RSA Link in the following location: [RSA NetWitness Codec Installer](#)
2. Copy the downloaded NetWitness ZIP archive to the system where Logstash runs.
3. Open a command prompt and change directory to Logstash home:
 - On Linux: `cd /usr/share/logstash.`
 - On Windows: `cd: logstash_directory`
For example: `cd: c:\Logstash\`
4. Stop the logstash service, if it is running.
 - On Linux, run the following command:
`systemctl stop logstash`
 - On Windows, open the Services window (you can search for it or find it from the Start menu), then locate the Logstash service in the list and click **Stop the service**.
5. Run the following command and check to see if **logstash-codec-netwitness** is listed.
 - On Linux:
`bin/logstash-plugin list`
 - On Windows:
`.\bin\logstash-plugin list`
6. If it is listed, delete it by running the following command:
 - On Linux:
`bin/logstash-plugin remove logstash-codec-netwitness`
 - On Windows:
`.\bin\logstash-plugin remove logstash-codec-netwitness`
7. To install the latest package, run the following command:
 - On Linux:
`bin/logstash-plugin install file:///<path-to-file>/logstash-codec-netwitness-offline-<version>.zip`
 - On Windows:
`.\bin\logstash-plugin install file:///<path-to-file>/logstash-codec-netwitness-offline-<version>.zip`

Note: Make sure to use forward slashes (/) as a separator between Windows sub-folders for the path to the logstash installation package.

If the codec is installed correctly, you receive a confirmation message. The following is an example:

```
Installing file: /usr/share/logstash/logstash-codec-netwitness-offline-1.0.0.zip
```

```
Install successful
```

8. Below are default paths for logstash configurations. All output, filter, and input configuration files are under these folders.

we would go over those configuration files in later sections.

- For Linux: `/etc/logstash/conf.d/`
- For Windows: `logstash_directory/config/`

For details on output files, see [Configure Logstash Output Plugins](#). For details on input and filter plugins, see [Logstash Input and Filter plugins](#).

9. Start the logstash service:

- On Linux, run the following command:

```
systemctl start logstash
```

- On Windows, open the Services window (you can search for it or find it from the Start menu), then locate the Logstash service in the list and click **Start the service**.

Configure Logstash Output Plugins

Logstash TCP Output

In order to send the events from Logstash to NetWitness, we use the TCP output plugin: <https://www.elastic.co/guide/en/logstash/current/plugins-outputs-tcp.html>

The TCP output is configured with the NetWitness codec, which formats the outgoing events to be consumable by a NetWitness Log Decoder or Virtual Log Collector (VLC).

The following is an example of a properly configured output block using TCP & the NetWitness codec:
Output Block

```
output { tcp { id => "nw-output-tcp" host => "10.10.1.2" #IP or Hostname of
destination Log Decoder or VLC port => 514 codec => netwitness } }
```

Logstash TLS Output

The output block can be further configured to allow for TLS communication between Logstash and NetWitness. An example of a properly configured output block using TLS and the NetWitness codec:
TLS Output Block

```
output { tcp { id => "nw-output-tcp" host => "10.10.1.2" #IP or Hostname of
destination Log Decoder or VLC port => 6514 ssl_enable => true codec =>
netwitness } }
```

TLS with Log Decoder (or Virtual Log Collector) Verification

TLS can also be set up to verify the Log Decoder or Virtual Log Collector (VLC) to which it will be communicating. To do this, the Root and Intermediate CA certificates need to be obtained and stored in a truststore for Logstash.

1. On the Log Decoder (or VLC) to which you will be sending events, run the following command:

```
cat /etc/pki/nw/ca/nwca-cert.pem /etc/pki/nw/ca/ssca-cert.pem > nw-
truststore.pem
```

2. Copy the `nw-truststore.pem` file to the Logstash machine and store it in a known location.
3. Create a certificate for the Logstash machine using a self-signed CA or your own CA.
4. Store the cert and private key files in a location of your choosing.

Note: You need to specify the locations of these files in your TLS output block.

The following code snippet shows an example of a properly configured output block using TLS and the NetWitness codec

Output Block with Verification

```
output { tcp { id => "nw-output-tcp" host => "10.10.1.2" #IP or Hostname of
```

```
destination Log Decoder or VLC  port => 6514  ssl_enable => true  ssl_verify =>
true  ssl_cacert => "/path/to/certs/nw-truststore.pem"  ssl_key =>
"/path/to/certs/privkey.pem"  ssl_cert => "/path/to/certs/cert.pem"  codec => netwitness
}}
```

Configure the Event Source

If you have logstash already install and configured to collect events from desired eventsources you can skip this section.

As a starting point, view the list of input plugins here: [Input Plugins](#). This is not meant to be an exhaustive list, just as a starting point to view some of the available input plugins.

The remainder of this section describes some examples.

Collect Apache File Logs

Typically, Apache logs are written to files on the disk, so to collect events from file you could use the **Filebeat** plugin.

To install and configure Filebeat, see the following websites:

1. Install the Filebeat service on Linux. Refer to the following link: [Filebeat Installation](#)
2. Configure Filebeat to collect from specific logs. Refer to the following link: [Filebeat Configuration](#)
3. Configure Filebeat to send the output to Logstash. Refer to the following link: [Filebeat Logstash Output](#)

Collect CentOS Audit Logs

To collect audit events from an operating system (for example CentOS), you could use the **Auditbeat** plugin.

To install and configure Auditbeat, see the following websites:

1. Install the Auditbeat service on Linux. Refer to the following link: [Auditbeat Installation](#)
2. Configure Auditbeat to collect from specific logs. Refer to the following link: [Auditbeat Configuration](#)
3. Configure Auditbeat to send the output to Logstash. Refer to the following link: [Auditbeat Logstash Output](#)

Configure Parameters for Filebeat or Auditbeat

For Filebeat or Auditbeat plugin, make sure to configure input and output parameters. Modify `/etc/filebeats/filebeat.yml` as shown below.

To enable file collection, modify the **Filebeat inputs** section as shown in the following image:

```
#===== Filebeat inputs =====  
  
filebeat.inputs:  
  
# Each - is an input. Most options can be set at the input level, so  
# you can use different inputs for various configurations.  
# Below are the input specific configurations.  
  
- type: log  
  
# Change to true to enable this input configuration.  
enabled: true  
  
# Paths that should be crawled and fetched. Glob based paths.  
paths:  
  - /var/log/*.log  
  #- c:\programdata\elasticsearch\logs\*
```

Modify the Outputs as follows:

- Comment out settings in the **Elasticsearch Output** section
- Uncomment **Logstash output** settings and provide logstash IP and Port.

Below is an example of the sections after changes are made:

```
#===== Outputs =====  
  
# Configure what output to use when sending the data collected by the beat.  
  
#----- Elasticsearch output -----  
#output.elasticsearch:  
  # Array of hosts to connect to.  
  # hosts: ["localhost:9200"]  
  
  # Optional protocol and basic auth credentials.  
  #protocol: "https"  
  #username: "elastic"  
  #password: "changeme"  
  
#----- Logstash output -----  
output.logstash:  
  # The Logstash hosts  
  hosts: ["localhost:5044"]  
  
  # Optional SSL. By default is off.  
  # List of root certificates for HTTPS server verifications  
  #ssl.certificate_authorities: ["/etc/pki/root/ca.pem"]  
  
  # Certificate for SSL client authentication  
  #ssl.certificate: "/etc/pki/client/cert.pem"  
  
  # Client Certificate Key  
  #ssl.key: "/etc/pki/client/cert.key"
```

Configure Logstash Filters to Add NetWitness Meta

In order for an event to be processed in the Log Decoder as a specific data type, you need to add some meta key information to the event in Logstash.

- `[@metadata][nw_type]` — NetWitness device parser content name
- `[@metadata][nw_msgid]` — NetWitness message pattern to parse message
- `[@metadata][nw_source_host]` — Originating event source's IP or host value

Note: The value for `nw_type` *must* match the device parser name. It should be composed of lowercase characters, numbers, or underscore and be less than 29 characters in length.

Optionally, you can add the following meta key:

`[@metadata][nw_collection_host]` — Collection system identifier (**lc.cid**)

By default, the NetWitness codec sends the complete JSON event as payload to the NetWitness Log Decoder. If the NetWitness `nw_type` device parser type has a custom payload format and failover payload format, the NetWitness codec plugin must be configured to use them. Please see the [Configure the Event Source](#) section for more details.

The following code snippet contains an example of adding the required meta:
Code to Populate NetWitness Meta

```
filter { if ![@metadata][nw_type] { if [agent][type] == "filebeat" { mutate { add_field => { "[@metadata][nw_type]" => "linux" "[@metadata][nw_msgid]" => "LOGSTASH001" "[@metadata][nw_source_host]" => "%{[host][hostname]}" } } } }
```

Advanced NetWitness Platform Configuration

Grok Filter Plugin

You can use Grok to parse incoming logs and extract valuable meta information. For details, see [Grok filter plugin: match](#). The meta extracted using grok is part of the full event package sent to NetWitness Platform, where it can be mapped to NetWitness meta.

Resources:

- List of Grok patterns: <https://github.com/logstash-plugins/logstash-patterns-core/tree/master/patterns>
- Grok debugger: <https://grokdebug.herokuapp.com/>

Logstash Input and Filter plugins

See the following URLs:

- [Input Plugins](#)
- [Filter Plugins](#)

You can use the beats input plugin for Logstash to receive events from beats sources, including Filebeat & Auditbeat: [Beats Input Plugin](#)

You can use the drop filter plugin for Logstash to filter out unwanted logs being passed through Logstash: [Drop Filter Plugin](#)

Filter out unwanted logs

You can also filter out unwanted logs using the drop-event processor for Filebeat & Auditbeat.

- Examples for Filebeat:
 - [Filebeat Reference: Filtering and Enhancing Data](#)
 - [Filebeat Reference: Drop Events](#)
- Examples for Auditbeat:
 - [Auditbeat Reference: Filter and Enhance the Exported Data](#)
 - [Auditbeat Reference: Drop Events](#)

Configure heartbeat plugin to send test logs to NetWitness

The **Heartbeat** plugin can be used to send a test message to verify connectivity between logstash and NetWitness. For details, see the Heartbeat Plugin configuration guide: [Heartbeat Input Plugin](#).
Example of Heartbeat Plugin

```
... heartbeat { id => "sample_plugin" #interval => 60 count => 3 message =>
```

```
"sequence" add_field => { "[@metadata][nw_type]" => "logstash_testlog" "msg" =>
"This is test log from some eventsource" } ...
```

Configure logstash to persist events in case of failure (Recommended)

By default, Logstash uses in-memory queues to buffer events. The size of these in-memory queues is not configurable. If there is a machine failure, or if the service is forcibly stopped, the contents of these queues are lost. To protect against data loss in these situations, Logstash supports persistent queues that are stored on disk and thus can survive failures. For details, see [Logstash Persistent Queues](#).

NetWitness Platform Codec Advanced Configuration

By default, the NetWitness codec sends the complete JSON event as payload to the NetWitness Log Decoder. If the NetWitness `nw_type` device parser type has a custom payload format, you must configure the NetWitness codec plugin to recognize this custom format.

The `payload_format` and `payload_format_failover` mappings use `nw_type` as the key. The `payload_format` mapping is searched first for the device type (`nw_type`). If the device type is not set, or no format is specified for `nw_type`, or the system fails to make all configured variable substitutions, the complete JSON output is used as the payload. If the primary format from the `payload_format` mapping fails, the `payload_format_failover` mapping is tried. If that also fails, the complete JSON output is used as the payload. You can use the format can use Logstash event field syntax for this custom configuration.

The following code snippet shows example of adding meta with custom payload formats.
Add meta with custom payload formats

```
output { if [@metadata][nw_type] { # Only targeted NetWitness items tcp { id =>
"netwitness-tcp-output-conf-output" host => "127.0.0.1" port => 514 ssl_enable
=> false codec => netwitness { # Payload format mapping by nw_type. # If
nw_type is absent or formatting fails, # JSON event is used as the payload
payload_format => { "apache" => "%APACHE-4-%{verb}: %{message}" }
# Failover format, if above format fails # If nw_type is absent or formatting fails,
# JSON event is used as the payload payload_format_failover => { "apache"
=> "%APACHE-4: %{message}" # When verb is missing } } } } }
```



Troubleshoot Installation Issues


If you encounter any issues during installation of Logstash, see [Logstash Installation and Setup](#).

Configure NetWitness Platform to Collect Events

You need to start capture on the Log Decoder to which you are sending your Logstash data.

To start or restart network capture on a Log Decoder:

1. Log in to **NetWitness Platform** and click the **ADMIN** icon > **Services**.
The Services view is displayed.
2. Select a **Log Decoder** service.
3. Under  (actions), select **View** > **System**.
4. In the toolbar, click  **Start Capture**.

Note: If the toolbar is displaying the Stop Capture ( **Stop Capture**) icon, then capture has already been started.

By default, Log Decoders support events that are up to 32 KB in size. If your events are getting truncated on the Log Decoder, use the following procedure to change the event size:

1. Change LogDecoder REST config at **http://LogDecoder_IP:50102/decoder/config**, where **LogDecoder_IP** is the IP address of your Log Decoder.
2. Set `pool.packet.page.size` to 64 KB.
3. Restart the Log Decoder: this is required after you change the `pool.packet.page` value.

Note: If you are collecting events larger than 64 KB in size, follow instructions above in the [Filter out unwanted logs](#) section. You can drop unwanted logs or fields for a specific event source, to reduce the size of the incoming data.

Linux Event Source Example

This section shows sample input, filters and output configuration to collect system and audit events from CentOS.

Input Plugin

An input plugin enables a specific source of events to be read by Logstash. The following code represents an example input plugin.

input-beats.conf

```
# Below input block collects events using beats plugins (e.g filebeats, auditbeats) # Skip
this block if it's already defined in another pipeline. input { beats { port => 5044 } }
```

Make sure that port 5044 is open on the Logstash machine. As an example, if Logstash is on a CentOS system, run the following commands to open port 5044:

```
firewall-cmd --add-port=5044/tcp
firewall-cmd --add-port=5044/tcp --permanent
firewall-cmd --reload
```

Output Plugin

An output plugin sends event data to a particular destination. Outputs are the final stage in the event pipeline.

output-netwitness-tcp.conf

```
# Below is tcp output plugin with netwitness codec to tranform events in syslog and send
it to LogDecoder # Only one of these configurations can be within the same pipeline.
```

```
output { #if [@metadata][nw_type] { # Only targeted Netwitness items tcp { id =>
"netwitness-tcp-output-conf-output" host => "10.10.100.100" ## LogDecoder IP port =>
514 ssl_enable => false #ssl_verify => true #ssl_cacert => "/path/to/certs/nw-
truststore.pem" #ssl_key => "/path/to/certs/privkey.pem" #ssl_cert =>
"/path/to/certs/cert.pem" codec => netwitness { # Payload format mapping by nw_type. #
If nw_type is absent or formatting fails, JSON event is used as the payload payload_
format => { "apache" => "%APACHE-4-%{verb}: %{message}" } # Failover format, if
above format fails # If nw_type is absent or formatting fails, JSON event is used as the
payload payload_format_failover => { "apache" => "%APACHE-4: %{message}" # When
verb is missing } } } }
```

Filter Plugin

A filter plugin performs intermediary processing on an event. Below is a filter plugin configuration for system events collected from linux using the Filebeat plugin.

linux-system.conf

Filters are often applied conditionally depending on the characteristics of the events.

Requires these additional configurations within the same pipeline: # input-beats.conf #

```
output-netwitness-tcp.conf filter { if ![@metadata][nw_type] { if [ecs][version] and [host]
[hostname] and [agent][type] == "filebeat" { if [event][module] == "system" { mutate { add_
field => { "[@metadata][nw_type]" => "linux" "[@metadata][nw_msgid]" =>
"LOGSTASH001" "[@metadata][nw_source_host]" => "%{[host][hostname]}" } } } } }
```

Below is filter plugin configuration for audit events collected from linux using the Auditbeat plugin.

linux-audit.conf

```
filter { if ![@metadata][nw_type] { # Update Once if [ecs][version] and [host][hostname]
and [agent][type] == "auditbeat" { if [event][module] == "audit" { mutate { add_field => { "
[@metadata][nw_type]" => "linux" "[@metadata][nw_msgid]" => "LOGSTASH002" "
[@metadata][nw_source_host]" => "%{[host][hostname]}" } } } } }
```

Create a Pipeline

It is recommended to have one pipeline for each input type. For example, all beats collection should be in the same pipeline. To run collection as separate pipeline, create a directory and add above input, filters, and output configuration files to it.

Example Pipeline for Beats

```
/etc/logstash/pipeline1/ /etc/logstash/pipeline1/input-beats.conf
```

```
/etc/logstash/pipeline1/output-netwitness-tcp.conf /etc/logstash/pipeline1/linux-
system.conf /etc/logstash/pipeline1/linux-audit.conf
```

Modify `/etc/logstash/pipeline.yml` and add the following entries:

Add to `pipeline.yml`

```
- pipeline.id: my-sample-pipeline-1 path.config: "/etc/logstash/pipeline1/*.conf"
```

Build Custom JSON Parser

This section is intended for advanced programmers who want to build their own JSON parser. It describes how to build a Logstash parser for a sample device. We use the Linux device as an example throughout.

Note: This chapter is optional: you do not need to build a custom JSON parser from scratch to input logs from Logstash to NetWitness Platform.

Major sections in this document:

- Configure a filter by defining several required pieces of metadata.
- Examine a sample log message from the Linux device
- Walk through creating the parser, based on the sample log message
- View the parsed meta from the sample log message, as it appears on the Log Decoder

Sample JSON Log Received on Log Decoder

Let's examine a sample log and discuss its contents.

```
<13>1 - Centos7 linux - LOGSTASH001 [lc@36807 lc.ctime="1585886465037"
lc.cid="Centos7" lc.ctype="logstash"] {"message": "msg='op=PAM:accounting
grantors=pam_access,pam_unix,pam_localuser acct=root exe=/usr/sbin/crond
hostname=? addr=? terminal=cron res=success'", "user":{
"email":"john.deaux@test.com", "username":"CORP\\deauxj" }, "host": { "name":
"Centos7", "hostname": "Centos7", "containerized": false, "architecture":
"x86_64", "id": "d1059ac783b24eb7bbde70a41fa572c9", "os": { "name": "CentOS
Linux", "kernel": "3.10.0-1062.el7.x86_64", "version": "7 (Core)", "codename":
"Core", "platform": "centos", "family": "redhat" } }, "@timestamp": "2020-04-
03T04:01:05.037Z", "files": [ "test1.log", "test2.log", "test3.log"
], "machine_details" : { "1" : { "hostname" : "USXXLinux" }, "2" : { "hostname"
: "USXXWindows" }}}
```

The first portion of the log is the RFC-5424 header:

```
<13>1 - Centos7 linux - LOGSTASH001 [lc@36807 lc.ctime="1585886465037"
lc.cid="Centos7" lc.ctype="logstash"]
```

This header contains the information that we used in setting our fields above:

- **nw_source_host:** Centos7 (Hostname)
- **nw_type:** linux (Device Type)
- **nw_msgid:** LOGSTASH001 (Message ID)

The remainder of the log is the JSON Payload.

JSON Payload

```
{"message": "msg='op=PAM:accounting grantors=pam_access,pam_unix,pam_
localuser acct=root exe=/usr/sbin/crond hostname=? addr=? terminal=cron
res=success'", "user": { "email": "john.deaux@test.com", "username": "CORP\\deauxj" },
"host": { "name": "Centos7", "hostname": "Centos7", "containerized": false,
```

```
"architecture": "x86_64", "id": "d1059ac783b24eb7bbde70a41fa572c9", "os": { "name":  
"CentOS Linux", "kernel": "3.10.0-1062.el7.x86_64", "version": "7 (Core)", "codename":  
"Core", "platform": "centos", "family": "redhat" }}, "@timestamp": "2020-04-  
03T04:01:05.037Z", "files": [ "test1.log", "test2.log", "test3.log" ], "machine_details": { "1":  
{ "hostname": "USXXLinux"}, "2": { "hostname": "USXXWindows" } }
```

Create the JSON Parser for a Linux Device

Now that we have the sample log from the Linux device, we can construct a filter plugin for this device.

Initial Parser to Match Message ID and Device Type

The parser name should match the device type. We call this initial parser `v20_linuxmsg.xml`, which matches the message ID from the event. We set `content` to a variable, `logstash_json_payload`, which represents the JSON payload. We will parse the payload later in the process.

Message ID and Device Type Parsing

```
<?xml version="1.0" encoding="ISO-8859-1"?> <DEVICEMESSAGES name="linux"  
displayname="Linux" group="Unix"> <VERSION device="2.0"/> <MESSAGE  
id1="LOGSTASH001" id2="LOGSTASH001" content="&lt;logstash_json_payload&gt;"  
> <!-- Additional logic to parse JSON payload --> </DEVICEMESSAGES>
```

Map Payload Contents to Datatypes

We create datatypes to map each element from the payload to meta that can be saved to the NetWitness database.

The entire payload is assigned to the **FileBeatsEvent** datatype.

```
<VARTYPE name="logstash_json_payload" dataType="FileBeatsEvent"/>
```

The timestamp is parsed and assigned to the **InternetTime** datatype.

```
<DataType name="InternetTime" dateTime="%W-%M-%DT%H:%T:%S.%V%E" />
```

Parse the Message String

Using the parser above, we parse (using the `FineParse` type defined above) the message string from the log file.

```
"message": "msg='op=PAM:accounting grantors=pam_access,pam_unix,pam_localuser  
acct=\"root\"  
exe=\"/usr/sbin/crond\" hostname=? addr=? terminal=cron res=success',
```

The following code extracts the values from the string and saves them to meta keys:

- **op** is saved to **operation.id**
- **acct** is saved to **service.account**
- **res** is saved to **result**
- **exe** is saved to **process.src**

Note that the **search** flag is set to **true** to parse key/value pairs regardless of their order in the string.
Extract Values: save to Meta

```
<DataType name="TagValParse" regex="(?: |^)(?:exe=(\S+)|acct=(\S+)|res=(\S+)|op=(\S+))" search="true"> <Capture index="1" meta="process.src" /> <Capture index="2" meta="service.account" /> <Capture index="3" meta="result" /> <Capture index="4" meta="operation.id" /> </DataType>
```

The following code:

- Assigns the whole key as **message** and maps it to the **FineParse** type.
- The **FineParse** type is then mapped to **TagValParse** type.

```
<DataType name="FineParse" regex="msg='(*)'"> <Capture index="1" type="TagValParse" /> </DataType> <DataType name="FileBeatsEvent" type="ElasticCommonSchemaSubset"> <Capture key="/message" type="FineParse" meta="message"/> <Capture key="/user/email" meta="email" /> <Capture key="/user/username" type="DomainUser"/> <Capture key="/files/" meta="sourcefile" /> <Capture key="/machine_details//hostname" meta="host.dst"/> </DataType>
```

Give the previous string and the code above, the output on the Log Decoder is as follows:

```
message: msg='op=PAM:accounting grantors=pam_access,pam_unix,pam_localuser
acct=root exe=/usr/sbin/crond
hostname=? addr=? terminal=cron res=success'
service.account: root
process.src: /usr/sbin/crond
result: success
operation.id: PAM:accounting
```

Parse an Array in JSON

In our sample JSON log file from earlier, one section contained an array object:

```
"files": [
  "test1.log",
  "test2.log",
  "test3.log"
]
```

To fetch all the values of an array, you need to define a capture key enclosed in forward slashes to fetch all values, for example **/files/**.

```
<DataType name="FileBeatsEvent" type="ElasticCommonSchemaSubset"> <Capture
```

```
key="/files/" meta="sourcefile" /> </DataType>
```

Using the code above on the sample array, the following would be the output on the Log Decoder:

```
sourcefile: test1.log
sourcefile: test2.log
sourcefile: test3.log
```

Parse a Nested JSON Object

Let's look at an example nested object from our sample log file from earlier:

```
"host": {
  "name": "Centos7",
  "hostname": "Centos7",
  "containerized": false,
  "architecture": "x86_64",
  "id": "d1059ac783b24eb7bbde70a41fa572c9",
  "os": {
    "name": "CentOS Linux",
    "kernel": "3.10.0-1062.el7.x86_64",
    "version": "7 (Core)",
    "codename": "Core",
    "platform": "centos",
    "family": "redhat"
  }
}
```

To fetch nested values, you need to build a path that contains the keys from each nested level. For example, to fetch the OS name from our example, you use the following code:

```
<DataType name="ElasticCommonSchemaSubset"> <Capture key="/host/os/name">
meta="OS" /> </DataType>
```

Using the code above on the sample nested object, the following would be the output on the Log Decoder:

```
OS: CentOS Linux
```

Capture Data That Has Varying Parent Key

When capturing structured data types like JSON, instead of a numbered capture index, you can provide a field name path that uses the key attribute. For example, assume we want to capture the **hostname** from **machine_details** and ignore the indexed key:

```
"machine_details": {
  "1": { "hostname": "USXXLinux"},
  "2": { "hostname": "USXXWindows"}
}
```

To fetch the required values, which have a varying parent key name, we leave the parent key empty in the path:

```
<DataType name="FileBeatsEvent" type="ElasticCommonSchemaSubset"> <Capture
key="/machine_details//hostname"> meta="host.dst" /> </DataType>
```

Using the code above on the sample, the following would be the output on the Log Decoder:

```
host.dst: USXXLinux
host.dst: USXXWindows
```

The Parsed Example Event on the Log Decoder

Assuming the sample log message from the beginning of this document, and using the parser that we have built, the image below details the event as it would appear on the Log Decoder.

```
<13>1 - Centos7 linux - LOGSTASH001 [lc@36807 lc.ctime="1585886465037" lc.cid="Centos7" lc.ctype="logstash"] {"message": "msg='op=PAM:accounting grantors=pam_access,pam_unix,pam_localuser acct=root exe=/usr/sbin/crond hostname=? addr=? terminal=cron res=success'", "user":{"email":"john.deaux@test.com", "username":"CORP\\deauxj"}}, "host":{"name":"Centos7", "hostname":"Centos7", "containerized": false, "architecture": "x86_64", "id": "d1059ac783b24eb7bbde70a41fa572c9", "os": {"name": "CentOS Linux", "kernel": "3.10.0-1062.el7.x86_64", "version": "7 (Core)", "codename": "Core", "platform": "centos", "family": "redhat"}}, "@timestamp": "2020-04-03T04:01:05.037Z", "files": [ "test1.log", "test2.log", "test3.log" ], "machine_details": { "1": { "hostname": "USXXLinux" }, "2": { "hostname": "USXXWindows" } } }
```

Raw Message

View Apr 22 2020 16:37:09 864 bytes sessionid: 1
lc.cid: Centos7
device.host: Centos7
forward.ip: 127.0.0.1
medium: Logs
device.type: linux
device.class: Unix
message: msg='op=PAM:accounting grantors=pam_access,pam_unix,pam_localuser acct=root exe=/usr/sbin/crond hostname=? addr=? terminal=cron res=success'
operation.id: PAM:accounting
service.account: root
process.src: /usr/sbin/crond
result: success
email: john.deaux@test.com
user: CORP\deauxj
domain: CORP
username: deauxj
alias.host: Centos7
hardware.id: d1059ac783b24eb7bbde70a41fa572c9
OS: CentOS Linux
lc.ctime: 1585886465
sourcefile: test1.log
sourcefile: test2.log
sourcefile: test3.log
host.dst: USXXLinux
host.dst: USXXWindows
msg.id: LOGSTASH001
msg.vd: LOGSTASH001
device.disc: 100
device.disc.type: linux
kq: thread: 0

Meta

The following representation of the sample log has meta values highlighted.

```
<13>1 - Centos7 linux - LOGSTASH001 [lc@36807 lc.ctime="1585886465037"
lc.cid="Centos7" lc.ctype="logstash"] {"message": "msg='op=PAM:accounting
grantors=pam_access,pam_unix,pam_localuser acct=root exe=/usr/sbin/crond
hostname=? addr=? terminal=cron res=success'", "user":{"
"email":"john.deaux@test.com", "username":"CORP\\deauxj"}}, "host":{"name":
"Centos7", "hostname": "Centos7", "containerized": false, "architecture":
"x86_64", "id": "d1059ac783b24eb7bbde70a41fa572c9", "os": {"name": "CentOS
Linux", "kernel": "3.10.0-1062.el7.x86_64", "version": "7 (Core)", "codename":
"Core", "platform": "centos", "family": "redhat"}}, "@timestamp": "2020-04-
03T04:01:05.037Z", "files": [ "test1.log", "test2.log", "test3.log"
],"machine_details": { "1": { "hostname": "USXXLinux" }, "2": { "hostname"
: "USXXWindows" } } }
```

Example Parser Listing

The following code represents the complete parser, including the components we built earlier in this document.

Example Parser Listing

```
<?xml version="1.0" encoding="ISO-8859-1"?> <DEVICEMESSAGES name="linux"
displayname="Linux" group="Unix"> <VERSION device="2.0" /> <MESSAGE
id1="LOGSTASH001" id2="LOGSTASH001" content="&lt;logstash_json_
payload&gt;" /> <VARTYPE name="logstash_json_payload"
dataType=FileBeatsEvent"/> <DataType name="InternetTime"
dateTime="%W-%M-%DT%H:%T:%S.%V%E" /> <DataType name="CollectionTime"
type="InternetTime" meta="lc.ctime"/> <DataType
name="ElasticCommonSchemaSubset" format="JSON"> <Capture
key="/@timestamp"> type="CollectionTime" /> <Capture key="/host/hostname">
```

```
meta="alias.host" /> <Capture key="/host/id"> meta="hardware.id" /> <Capture
key="/host/os/name"> meta="OS" /> </DataType> <DataType name="DomainUser"
regex="(?:\w+)\\"?(\w+)"> <Capture index="0" meta="user" /> <Capture index="1"
meta="domain" /> <Capture index="2" meta="username" /> </DataType> <DataType
name="TagValParse" regex="(?:|^)(?:exe=(\S+)|acct=(\S+)|res=(\S+)|op=(\S+))"
search="true"> <Capture index="1" meta="process.src" /> <Capture index="2"
meta="service.account" /> <Capture index="3" meta="result" /> <Capture index="4"
meta="operation.id" /> </DataType> <DataType name="FineParse" regex="msg='(.*)'">
<Capture index="1" type="TagValParse" /> </DataType> <DataType
name="FileBeatsEvent" type="ElasticCommonSchemaSubset"> <Capture
key="/message" type="FineParse" meta="message"/> <Capture key="/user/email"
meta="email" /> <Capture key="/user/username" type="DomainUser"/> <Capture
key="/files/" meta="sourcefile" /> <Capture key="/machine_details//hostname"
meta="host.dst" /> </DataType> </DEVICEMESSAGES>
```

Deploy JSON parser

After you have built or changed a JSON parser, you need to upload it to the NetWitness Platform Log Decoder.

1. SSH to the Log Decoder system.
2. Copy the custom parser file to the following folder:

```
/etc/netwitness/ng/envision/etc/devices/eventsources
```

where **eventsources** is the name of the event source. You may need to create the folder if it doesn't already exist.

For example, we need to create **linux** folder under `/etc/netwitness/ng/envision/etc/devices` directory and copy the **v20_linuxmsg.xml** parser file to `/etc/netwitness/ng/envision/etc/devices/linux` directory.

3. To get the new parser loaded into memory, you need to reload the parsers on the Log Decoder.

Reload Parsers from REST

From a browser, run the REST reload command by entering the following URL:

```
http://<logdecoder_ip>:50102/decoder/parsers?msg=reload
```


For example, if your Log Decoder IP address is **10.10.100.101**, use the following string:


```
http://10.10.100.101:50102/decoder/parsers?msg=reload
```

If the call is successful, you should see a REST response, "The parsers have been reloaded."

Reload Parsers from NetWitness Platform UI

You can also reload your parsers from the UI as follows.

1. In the NetWitness Platform UI, navigate to  (Admin) > **Services**.
The Services view is displayed.
2. Select the Log Decoder to which you want to reload the parsers, and click **View > Explore**.
3. In the left pane, navigate to **decoder > parsers**.
4. Right-click **parsers** and select **Properties**.
5. From the drop-down menu in the Properties panel, select **reload**.

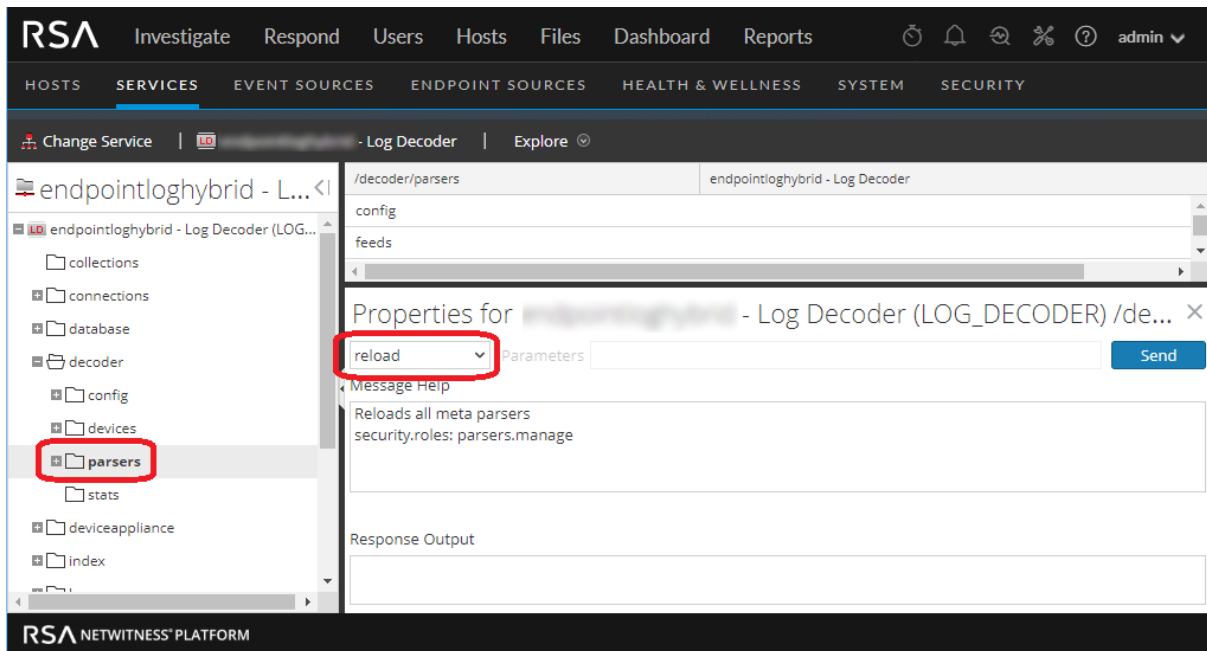

6. Click **Send**.